

USER'S GUIDE

LNC200 Series



USER'S GUIDE LNC200 Series

Thank you for purchasing this product. Lorex is committed to providing our customers with a high quality, reliable security solution.

This manual refers to the following models:

LNC201

LNC204

For the latest online manual, downloads and product updates, and to learn about our complete line of accessory products, please visit our website at:

www.lorextechnology.com



WARNING

**RISK OF ELECTRIC SHOCK
DO NOT OPEN**



WARNING: TO REDUCE THE RISK OF ELECTRIC SHOCK DO NOT REMOVE COVER. NO USER SERVICABLE PARTS INSIDE.

REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING: TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS UNIT TO RAIN OR MOISTURE.

CAUTION: TO PREVENT ELECTRIC SHOCK, MATCH WIDE BLADE OF THE PLUG TO THE WIDE SLOT AND FULLY INSERT.

Table of contents

1	Important Safeguards	1
1.1	Safety Instructions	1
1.2	If using this product as a baby monitor:	1
2	Features	2
3	Camera Overview	3
4	Getting Started	5
4.1	WiFi Setup	5
4.2	Ethernet Setup	5
5	Wall or Ceiling Mounting	7
5.1	Installation Tips and Warnings	7
5.2	Installation	7
6	Connecting to Your Camera on iPhone®	9
6.1	WiFi Setup	9
6.2	Ethernet Setup	12
7	Connecting to Your Camera on iPad®	14
7.1	WiFi Setup	14
7.2	Ethernet Setup	16
8	Connecting to Your Camera on Android™	19
8.1	WiFi Setup	19
8.2	Ethernet Setup	21
9	Connecting to Your Camera on PC	24
9.1	Connecting to Your Camera on PC	24
9.2	PC WiFi Setup	26
10	Connecting to Your Camera on Mac	29
10.1	Connecting to Your Camera on a Mac	29
10.2	Mac WiFi Setup	32
11	L-View for PC	35
11.1	System Requirements	35
11.2	L-View for PC Interface	35
11.2.1	Display Sub-Menu	37
11.2.2	All Camera Action	38
11.3	Camera List (Managing Cameras)	38
11.3.1	Adding Cameras to Camera List	38
11.3.2	Saving Camera Passwords	39
11.3.3	Deleting Cameras	40
11.3.4	Configuring Mobile Streaming Settings	40
11.3.5	Configuring Night Mode Control	41
11.4	Recording to Your PC's Hard Drive	42
11.5	L-Play: Playing back Video from your PC's Hard Drive	43
11.6	Playing Back Recordings on the microSD card with L-View	45
11.7	Configuring Camera Video Settings	46
11.7.1	Quality Tab (Configuring Resolution, Frame Rate, and Bandwidth)	47
11.7.2	Video Tab (Configure General Video Settings)	48
11.7.3	Control Tab (Configure Status LED's and Motion Detection Sensitivity)	49
11.7.4	Camera Info Tab	49
11.8	Configuring L-View	50

Table of contents

11.8.1	Directories (Opening or Changing the Snapshot/ Recording Folder)	50
11.8.2	Startup Options	50
11.8.3	Fixed IP Access	51
11.8.4	Login (Enabling a Password to Access L-View)	52
11.8.5	Image Ratio	52
11.8.6	Software Update	53
12	L-View for Mac	54
12.1	System Requirements.....	54
12.2	L-View for Mac Interface.....	54
12.3	Camera List (Managing Cameras)	56
12.3.1	Adding Cameras to Camera List	56
12.3.2	Deleting Cameras from Camera List	56
12.4	Recording Video to Your Mac's Hard Drive	56
12.4.1	Playing Back Video from Your Mac's Hard Drive	57
12.5	Playing Back Recordings on the microSD card with L-View	58
12.6	Using Camera List to Modify Camera Settings.....	59
12.6.1	Quality Tab (Configure Bandwidth, Resolution, and Frame Rate).....	59
12.6.2	Video Tab (Configure General Video Settings)	61
12.6.3	Control Tab (Configure Status LED's and Motion Detection Sensitivity).....	62
12.6.4	Camera Info Tab	63
12.6.5	Configuring Night Mode Settings	63
13	iPhone® App	65
13.1	Live Viewing with Lorex Ping for iPhone®.....	65
13.1.1	Using 2-Way-Audio (Intercom)	65
13.1.2	Taking Snapshots.....	66
13.1.3	Recording Video to iPhone®	66
13.2	Playing Back Video Recorded on iPhone®	66
13.2.1	Using Playback.....	66
13.3	Playing Back Video Recorded on microSD on iPhone®	67
13.3.1	Deleting Video Recordings on microSD.....	68
13.4	Using Playback	69
13.5	Using Camera List to Edit Camera Settings	70
13.5.1	Editing Camera Connection Settings	70
13.5.2	Deleting Cameras from Camera List	71
13.5.3	Editing Motion/Sound Notification Settings (Push Notifications).....	72
13.5.4	Configuring Temperature Push Notifications and Temperature Units (Fahrenheit or Celsius)	73
13.5.5	Viewing the Temperature Chart	74
13.5.6	Editing Camera Mobile Streaming Settings	75
13.5.7	Editing Camera Video Settings.....	76
13.5.8	Configuring LED Control and Motion Detection Sensitivity.....	78
13.5.9	Configuring Night Mode Settings	78
13.5.10	Editing Camera Wired Network Settings.....	80
13.5.11	Editing Camera WiFi Network Settings.....	81
13.5.12	Enabling Email Notifications	82
13.5.13	Enabling Speaker Alarms.....	83

Table of contents

	13.5.14 Configuring microSD Recording	84
	13.5.15 Configuring the Camera Recording and Alarm Schedule.....	85
	13.5.16 Configuring the Camera Date and Time	88
	13.5.17 Rebooting the Camera	89
13.6	Using Local Search to Add Cameras	89
14	iPad® App	91
14.1	Live Viewing with Lorex Ping HD	91
	14.1.1 Using 2-Way Audio (Intercom).....	91
	14.1.2 Taking Snapshots.....	92
	14.1.3 Recording Video to iPad	92
14.2	Playing Back Video Recorded to iPad®	92
14.3	Playing Back Video Recorded to microSD on iPad®.....	93
14.4	Using Camera List to Edit Camera Settings	93
	14.4.1 Editing Camera Connection Settings	94
	14.4.2 Deleting Cameras from Camera List	95
	14.4.3 Editing Motion/ Sound Notification Settings (Push Notifications).....	96
	14.4.4 Configuring Temperature Push Notifications and temperature Units (Fahrenheit or Celsius).....	97
	14.4.5 Editing Camera Mobile Streaming Settings	97
	14.4.6 Editing Camera Video Settings.....	98
	14.4.7 Configuring LED Control and Motion Detection Sensitivity.....	100
	14.4.8 Configuring Night Mode Settings	101
	14.4.9 Editing Camera Wired Network Settings.....	101
	14.4.10 Editing Camera WiFi Network Settings.....	102
	14.4.11 Enabling Email Notifications	103
	14.4.12 Enabling Speaker Alarms.....	104
	14.4.13 Configuring microSD Recording	105
	14.4.14 Configuring the Camera Recording and Alarm Schedule.....	106
	14.4.15 Configuring the Camera Date and Time	108
	14.4.16 Rebooting the Camera	109
14.5	Using Local Search to Add Cameras	110
15	Android™ App	111
15.1	Live Viewing with Lorex Ping for Android™	111
	15.1.1 Using 2-way Audio (Intercom)	111
	15.1.2 Saving Snapshots	111
	15.1.3 Recording Video to Android™	112
15.2	Playing Back Video Recorded to your Android™ Device.....	112
15.3	Playing Back Video Recorded on microSD on Android™	113
	15.3.1 Deleting Video Recordings on microSD.....	114
15.4	Using Camera List to Edit Camera Settings	115
	15.4.1 Editing Camera Connection Settings	116
	15.4.2 Deleting Cameras from Camera List	116
	15.4.3 Editing Camera Mobile Streaming Settings	116
	15.4.4 Editing Camera Video Settings.....	117
	15.4.5 Configuring LED Control and Motion Detection Sensitivity.....	118
	15.4.6 Configuring Night Mode Settings	119

Table of contents

15.4.7	Enabling Motion/Sound Push Alarm Notifications	120
15.4.8	Configuring Temperature Push Notifications and Temperature Units (Fahrenheit or Celsius)	121
15.4.9	Viewing the Temperature Chart	121
15.4.10	Editing Camera Wired Network Settings	122
15.4.11	Editing Camera WiFi Network Settings	123
15.4.12	Enabling Email Notifications	124
15.4.13	Enabling Speaker Alarms	125
15.4.14	Enabling microSD Recording	126
15.4.15	Configuring the Recording and Alarm Schedule	126
15.4.16	Configuring the Camera Date and Time	129
15.4.17	Rebooting the Camera	129
15.5	Using Local Search to Add Cameras	130
16	Configuring Camera Settings Using a Browser.....	131
16.1	Web Configure Overview	131
16.2	Network	132
16.2.1	Wired Network (DHCP or Fixed IP)	132
16.2.2	WiFi Security (Configuring WiFi settings)	133
16.3	Video	133
16.3.1	Video Settings	133
16.3.2	Mobile Video	135
16.3.3	Night Mode	135
16.4	Schedule	136
16.4.1	Email/FTP Alarm Settings (Configuring Email Alarms)	136
16.4.2	Speaker Alarm (Configuring Audio Alarms)	138
16.4.3	SD Card (Configuring microSD Recording)	138
16.4.4	Scheduling (Configuring Recording and Alarm Schedules)	139
16.5	Thermometer	140
16.6	Admin	141
16.6.1	Admin Login	141
16.6.2	LED Control	142
16.6.3	Date/Time	143
16.6.4	Upgrade	144
16.6.5	Reboot	146
17	Technical Specifications.....	147
18	Cleaning and Disposal	149
18.1	Disposal of the Device	149
19	Notices.....	150
20	Troubleshooting	151

Important Safeguards

1.1 Safety Instructions

- Read this guide carefully and keep it for future reference.
- Camera is rated for indoor use only.
- Do not use in wet or humid areas.
- Use the camera within given temperature, humidity, and voltage levels noted in the Technical Specifications.
- Do not use the camera near a heat source, such as a radiator.
- Do not point the camera directly towards the sun or a source of intense light.
- Do not disassemble the camera.
- Periodic cleaning may be required. Use a damp cloth only. Do not use harsh cleaners or aerosol cleaners.
- Do not cover the camera with a towel or blanket.
- Keep all power and network cables out of reach of children.
- Use only the included power adapter or USB power adapters rated for 1A or higher.

1.2 If using this product as a baby monitor:


We advise you to take the following precautions to avoid possible injury to infants:

- **DO NOT** place the camera too close to cribs, bassinets, play yards, and other safe sleep environments for infants.
- **MAKE SURE** to run all power adapter cords and network cables where they are unlikely to be tripped over and are out of arms reach of your infant. Keep them at least **3ft / 1m** away.
- **MAKE SURE** the camera is on a stable footing so it cannot be easily knocked over.



NOTE

These precautions are important even if your infant is not yet standing or mobile.

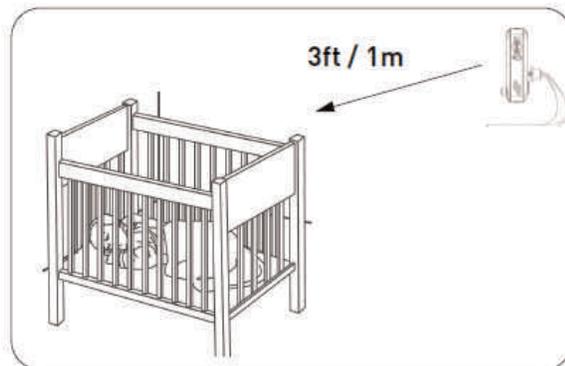



- iOS, Android™, PC and Mac compatible
- Mega-pixel for up to 1280x800 resolution at 30fps
- Wi-Fi & wired internet connectivity
- Easy connection to Wi-Fi networks with WPS¹
- Night vision up to 30ft with single high-power IR LED²
- microSD recording & playback supported³
- 5 second pre-recording on SD card
- Dual motion detection: PIR & video
- Sound activated alerts
- Infrared thermometer and temperature alarm control
- Push notification of events & email alerts with snap shot attachment
- Built-in speaker and microphone for 2-way audio
- H.264 video compression
- Supports up to 20 simultaneous users⁴
- Triple streaming for simultaneous SD card, PC and Mobile Recording
- Flexible indoor mounting (counter, wall, ceiling)
- Expandable up to 4 cameras
- Watchdog function to prevent system failure


As our product is subject to continuous improvement, Lorex Technology & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation.




NOTE

1. Compatible with WPS enabled routers (not included).
2. Infrared illumination range under ideal conditions. Actual range and clarity may vary depending on scene/object reflection and camera application.
3. microSD Card not included (supports up to 32GB).
4. Connection speed may vary depending Internet bandwidth.

Camera Overview

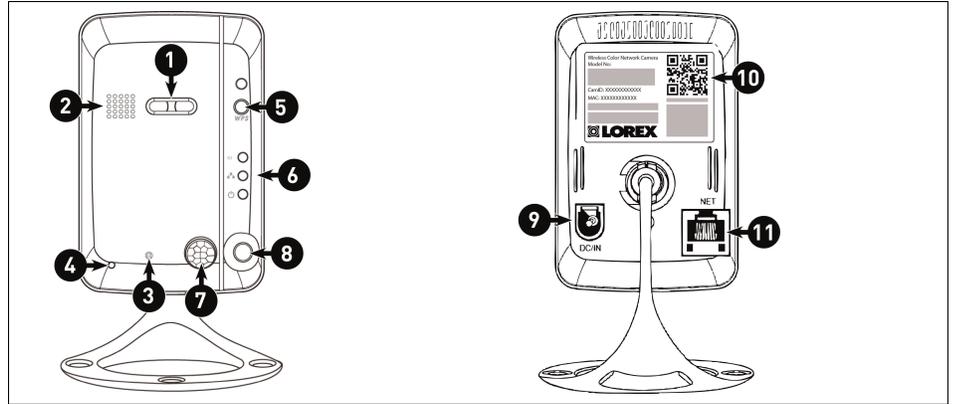

1. **Camera Lens:** The camera has separate lenses for day/night use.
2. **Speaker:** Enables 2-way audio and alarms.
3. **Temperature Sensor:** Detects the room's ambient temperature. The temperature is displayed on the camera's video display. You may enable temperature alerts using the Lorex Ping app.
4. **Microphone**
5. **WPS Button:** Used during Quick Scan WiFi setup or to connect the camera to a wireless router (not included) with a WPS button.
6. **Indicator Lights:**
 - **SD:** Glows when a microSD card (not included) is inserted. Flashes during recording.
 -  / **Network:** Glows when connected to an Ethernet or WiFi network. Flashes when sending or receiving data.
 -  / **Status:** Glows when camera is connected to the Internet. Flashes when there is a connection problem.
7. **PIR Motion Sensor:** Allows the camera to detect motion by tracking body heat.
8. **Infrared LED:** Allows the camera to see in the dark.
9. **DC/IN:** Connect the included power adapter.
10. **CamID Label:** Shows the camera's CamID number and a QR code for easy setup using mobile devices.
11. **NET:** Connect an Ethernet cable and connect the other end to your router (not included).

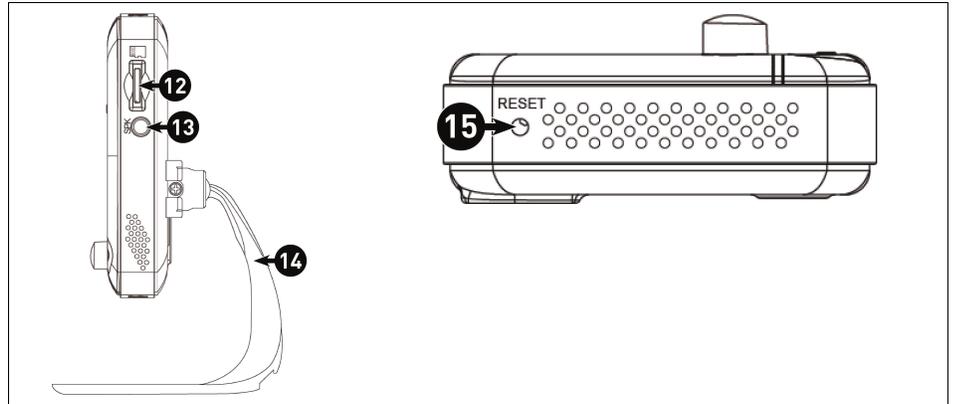

12. **microSD Card Slot:** Insert a microSD card (not included) to enable recording on the camera. Camera supports microSD or microSDHC cards up to a maximum size of 32GB.
13. **Audio Out:** Connect to an external speaker (not included) using a 3.5mm headphone jack.
14. **Mounting Stand:** For mounting instructions, see *5 Wall or Ceiling Mounting*, page 7.
15. **Reset Button:** While the camera is powered on, press with a pin or small object for at least 4 seconds to reset the camera to factory defaults. This is useful if you have forgotten the password for the camera.

Getting Started

Complete the following steps to setup the camera to use your wireless network.

4.1 WiFi Setup


Use this setup if the camera is within range of your wireless network. This setup does not require a wired connection to your router.



NOTE

Camera requires a wired connection to power.

1. Connect the power adapter to the camera and connect the other end to a power outlet. Do not connect the Ethernet cable.

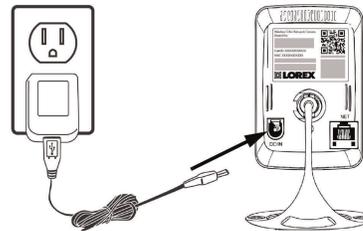


Choose the device you want to connect to the camera with from the list below to complete the rest of the WiFi connection process:

- To connect to the camera on iPhone, see 6 *Connecting to Your Camera on iPhone®*, page 9
- To connect to the camera on iPad, see 7 *Connecting to Your Camera on iPad®*, page 14
- To connect to the camera on Android, see 8 *Connecting to Your Camera on Android™*, page 19
- To connect to the camera on PC, see 9 *Connecting to Your Camera on PC*, page 24
- To connect to the camera on Mac, see 10 *Connecting to Your Camera on Mac*, page 29

4.2 Ethernet Setup


Complete the following steps to setup the camera with a wired connection to your router.

1. Connect the power adapter to the camera and connect the other end to a power outlet. Do not connect the Ethernet cable.

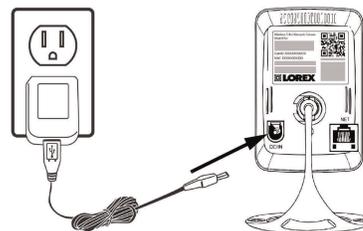


2. Connect the camera to your local network:

- 2.1. Connect an Ethernet cable (included) to the **NET** port on the camera and connect the other end to an available LAN port (usually numbered 1~4) on your router (not included). The blue Network LED on the camera will glow blue when the camera is connected to your network.

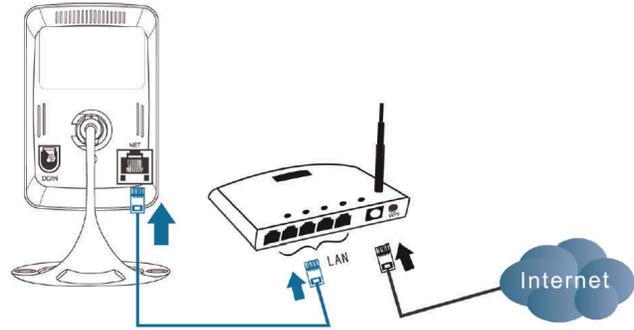

OR:

- 2.2. **OPTIONAL — PC and Mac only:** If your router supports WPS, press and hold the **WPS** button on your router until the WPS light turns on. Then, press the **WPS** button on the camera within 1 minute. The camera will automatically connect to your WiFi network and the Network LED on the camera will turn on.

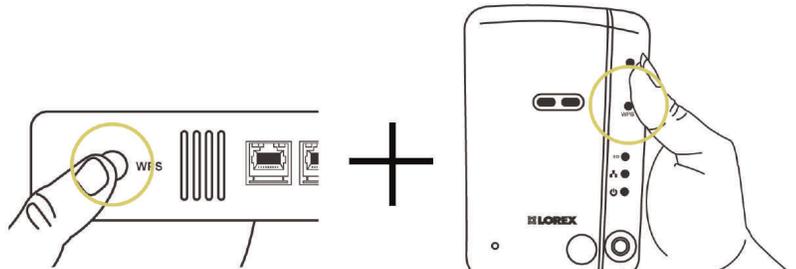

NOTE

Not all routers support WPS, and the location of the WPS button on your router depends on your router model. Check your router's instruction manual for details.

Choose the device you want to connect to the camera with from the list below to complete the rest of the wired (Ethernet) connection process:


- To connect to the camera on iPhone, see 6 *Connecting to Your Camera on iPhone®*, page 9
- To connect to the camera on iPad, see 7 *Connecting to Your Camera on iPad®*, page 14
- To connect to the camera on Android, see 8 *Connecting to Your Camera on Android™*, page 19
- To connect to the camera on PC, see 9 *Connecting to Your Camera on PC*, page 24
- To connect to the camera on Mac, see 10 *Connecting to Your Camera on Mac*, page 29

5.1 Installation Tips and Warnings


- **Camera is rated for indoor use only.** Do not install in wet or humid areas.
- **MAKE SURE** to run all power adapter and network cables at least 3ft / 1m away from cribs, bassinets, play yards, and other safe sleep environments for infants.
- Do not point the camera out of a window. The camera will not be able to see at night-time due to reflection from the Infrared LED.
- Temporarily connect the camera and test it before permanent installation.
- If using the camera with a wireless network, set up the camera's wireless connection before permanent installation.
- Make sure that power adapter cable and Ethernet cable (if connecting the camera using Ethernet) are long enough to reach the installation location.

5.2 Installation

1. Use the camera mounting stand to mark holes for the mounting screws. If you are installing the camera in the ceiling, the screw holes should face the same direction that you would like the camera to point.
2. Drill holes for the mounting screws. If installing in drywall, it is recommended to use the included drywall anchors.
3. Attach the camera to the wall or ceiling using the included mounting screws. Adjust the camera angle as necessary. See below for suggested stand configurations.

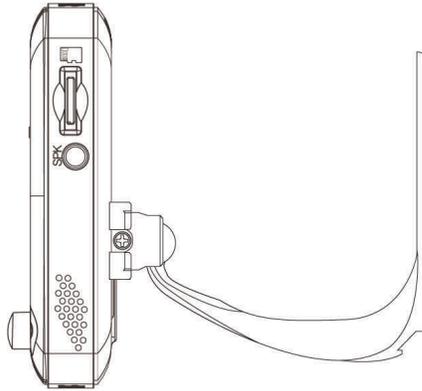


Wall Mount

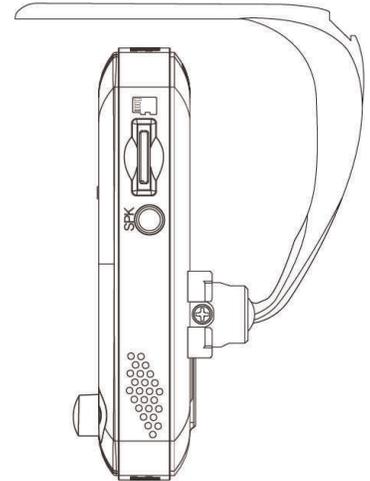

Ceiling Mount

-
- Secure the stand position by using a Phillips screwdriver to tighten the screw connecting the camera to the stand (see diagram below).

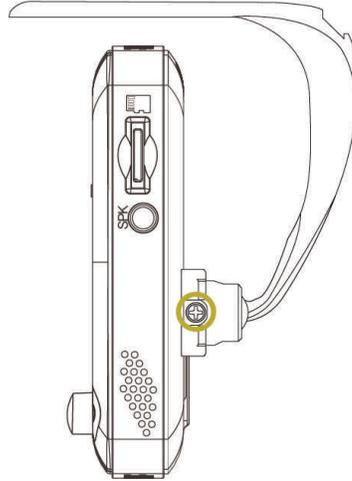

- Connect the power adapter cable and Ethernet cable (if connecting the camera using Ethernet) to the camera.

Connecting to Your Camera on iPhone®

Follow the steps below to get up and running on an iPhone®, using WiFi or Ethernet. Ensure you have completed the appropriate physical setup detailed in 4 *Getting Started*, page 5 before you start.

6.1 WiFi Setup


1. Connect your iPhone® to your WiFi network. See your iPhone's user guide for details on connecting to WiFi networks.
2. Download the free **Lorex Ping** app from the App Store.




NOTE

Lorex Ping is a free application, but it requires a valid iTunes account to download. See www.lorex-technology.com for the latest device compatibility list.


3. Tap the Lorex Ping icon () from the home screen to open Lorex Ping.
4. Register your product using the Lorex Ping app by following the on-screen instructions.
5. Press **Wifi Setup** then tap **Next**.

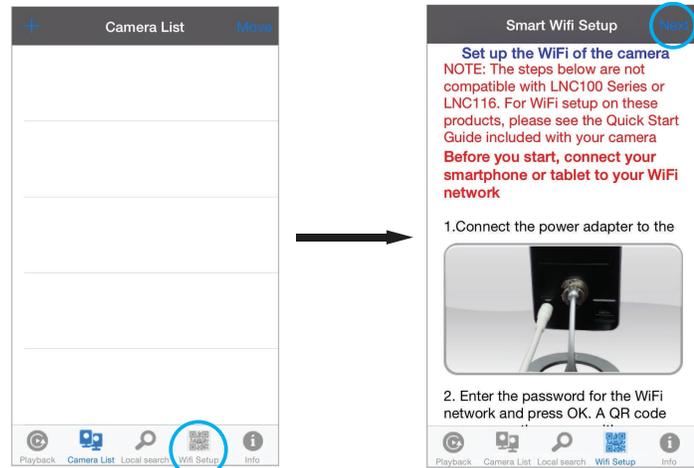


6. Enter the password for your WiFi network and press **OK**. A QR code appears on the screen with your WiFi network details.

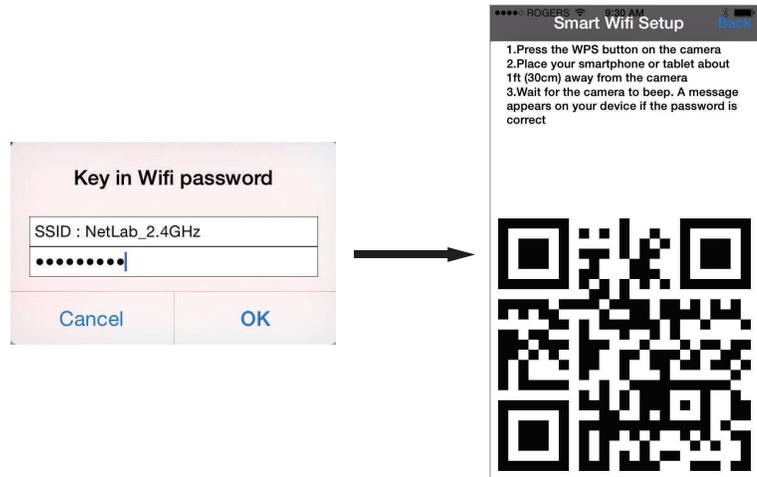

7. Press the **WPS** button on the camera. The LEDs will start flashing.

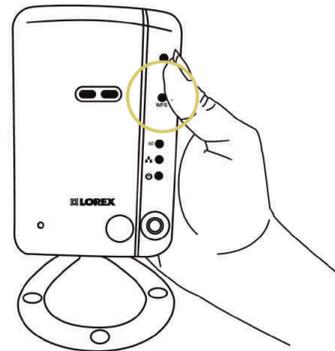


8. Place your device about 1ft (30cm) away from the camera.

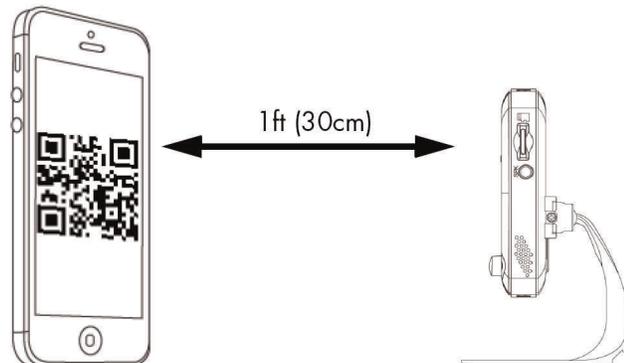


The camera scans the QR code on your iPhone® to connect to the WiFi network. When the connection is successful, the camera beeps, and the "Camera Found" message below appears on your device after a few seconds.


9. Enter a name for your camera and press **OK**.




10. Tap the camera to connect.

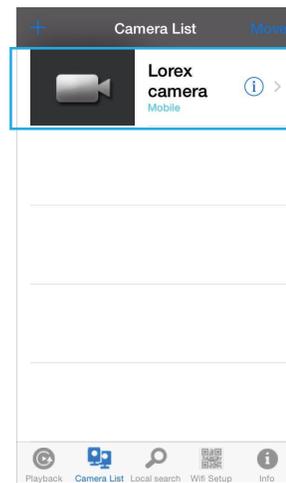

11. If this is the first time connecting to the camera, you will be prompted to create your own password. Tap **OK**.

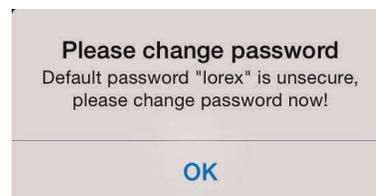

12. Under **New password**, enter a new password for the camera and repeat the password under **Confirm password**. Tap **OK**.




13. Tap the camera again to connect to the camera. Lorex Ping streams live video from your camera.

6.2 Ethernet Setup


1. Download **Lorex Ping** from the App Store.

 NOTE
Lorex Ping is a free application, but it requires a valid iTunes account to download.

2. Tap the Lorex Ping icon () from the home screen to open Lorex Ping.
3. Register your product using the Lorex Ping app by following the on-screen instructions.
4. From the Camera List, tap + to add a camera.

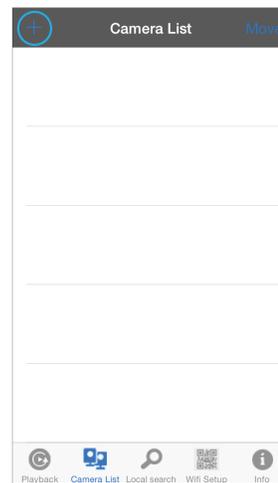


5. Enter the following information:

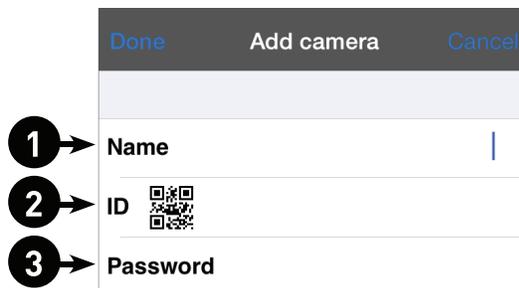

- 5.1. Under **Name**, enter a name for your camera. This can be anything of your choice.
- 5.2. Under **ID**, press the QR code button () and line up the QR code printed on the back of the camera using the camera on the phone. The **CamID** will automatically be entered.
 - **OR:** Manually enter the **CamID** printed on the camera.
- 5.3. Under **Password**, enter the camera password. If this is the first time connecting to the camera, enter **lorex**. Press **Done**.


6. Tap the name of the camera in the Camera List to connect to the camera. Lorex Ping connects to the camera.

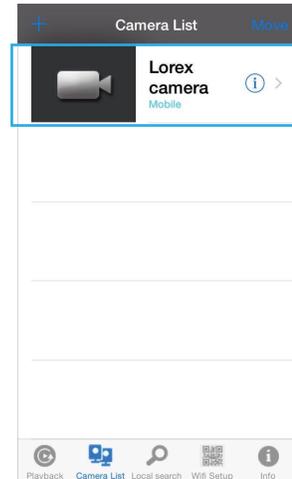

7. If this is the first time connecting to the camera, you will be prompted to create your own password. Tap **OK**.



8. Under **New password**, enter a new password for the camera and repeat the password under **Confirm password**. Tap **OK**.



9. Tap the camera again to connect to the camera. Lorex Ping streams live video from your camera.

Connecting to Your Camera on iPad®

Follow the steps below to get up and running on an iPhone®, using WiFi or Ethernet. Ensure you have completed the appropriate physical setup detailed in 4 *Getting Started*, page 5 before you start.

7.1 WiFi Setup


1. Connect your iPad® to your WiFi network. See your iPad's user guide for details on connecting to WiFi networks.
2. Download the free **Lorex Ping HD** app from the App Store.

	NOTE
Lorex Ping HD is a free application, but it requires a valid iTunes account to download. See www.lor-extechnology.com for the latest device compatibility list.	


3. Tap the Lorex Ping HD icon () from the home screen to open Lorex Ping.
4. Register your product using the Lorex Ping app by following the on-screen instructions.
5. Press **Wifi Setup** then tap **Next**.




6. Enter the password for your WiFi network and press **OK**. A QR code appears on the screen with your WiFi network details.

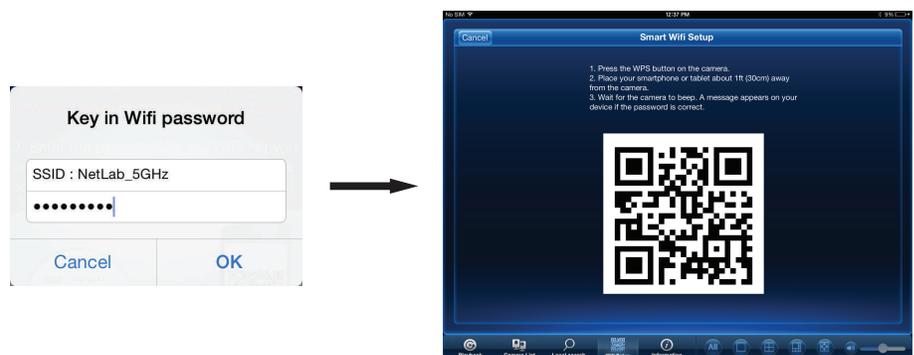

7. Press the **WPS** button on the camera. The LEDs will start flashing.




8. Place your device about 1ft (30cm) away from the camera.

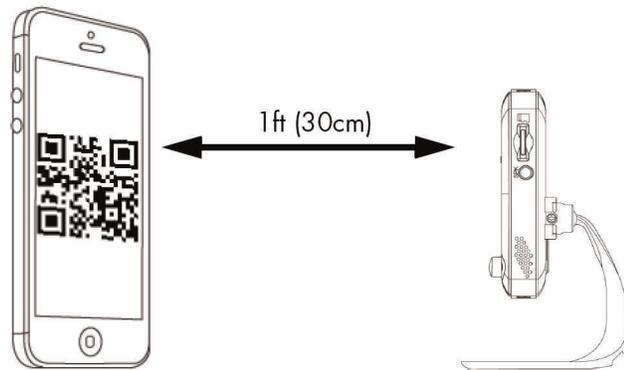

The camera scans the QR code on your iPad® to connect to the WiFi network. When the connection is successful, the camera beeps, and the “Camera Found” message below appears on your device after a few seconds.

9. Enter a name for your camera and press **OK**.



10. Tap the camera to connect.

11. If this is the first time connecting to the camera, you will be prompted to create your own password. Tap **OK**.



12. Under **New password**, enter a new password for the camera and repeat the password under **Confirm password**. Tap **Done**.



13. Tap the name of the camera in **Camera List** again to connect to the camera. For details on using the iPad® app, see 14 *iPad® App*, page 91.

7.2 Ethernet Setup


1. Download the **Lorex Ping HD** app from the App Store.

	NOTE
Lorex Ping HD is a free application, but it requires a valid iTunes account to download. See www.lor-extechnology.com for the latest device compatibility list.	

2. Tap the Lorex Ping icon () from the home screen to open Lorex Ping.
3. Register your product using the Lorex Ping app by following the on-screen instructions.
4. From the Camera List, tap + to add a camera.



5. Enter the following information:

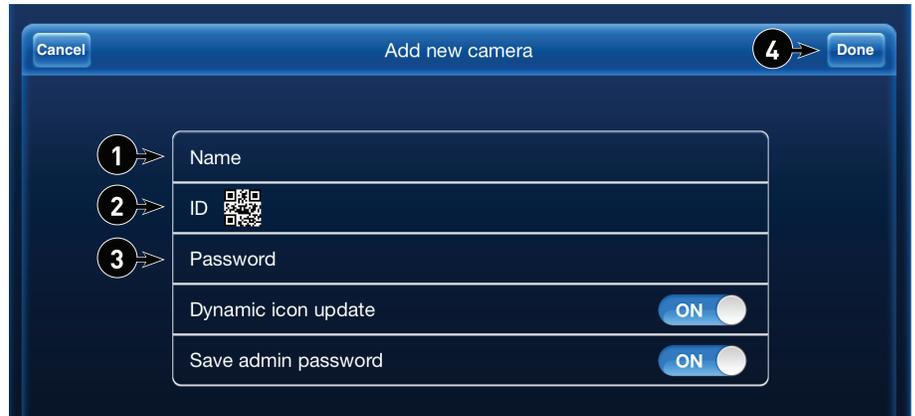


- 5.1. Under **Name**, enter a name for your camera. This can be anything of your choice.
- 5.2. Under **ID**, press the QR code button (📷) and line up the QR code printed on the back of the camera using the camera on the iPad. The **CamID** will automatically be entered.
 - OR: Manually enter the **CamID** printed on the camera.


**NOTE**

QR code setup is not compatible with the 1st generation iPad®. If you have a 1st generation iPad®, manually enter the **CamID** printed on the camera into **ID**.


- 5.3. Under **Password**, enter the camera password. If this is the first time connecting to the camera, enter **lorex**. Press **Done**.
6. Tap the name of the camera in the **Camera List** to connect to the camera. Lorex Ping connects to the camera.

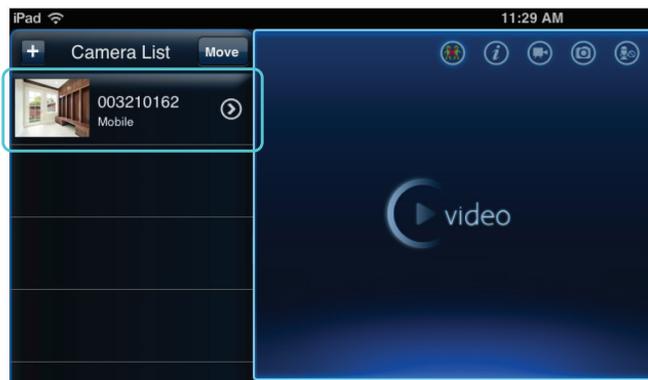

-
- If this is the first time connecting to the camera, you will be prompted to create your own password. Tap **OK**.



- Under **New password**, enter a new password for the camera and repeat the password under **Confirm password**. Tap **Done**.

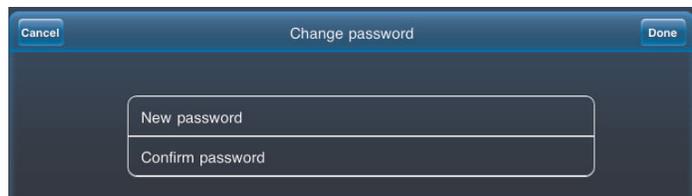

- Tap the name of the camera in Camera List again to connect to the camera. For details on using the iPad app, see 14 *iPad® App*, page 91.

Connecting to Your Camera on Android™

Follow the steps below to get up and running on an Android™ phone or tablet, using WiFi or Ethernet. Ensure you have completed the appropriate physical setup detailed in 4 *Getting Started*, page 5 before you start.

8.1 WiFi Setup


1. Download the free **Lorex Ping** app from the Google Play Store.




NOTE

Lorex Ping is a free application. See www.lorextechology.com for the latest device compatibility list.


2. Tap the Lorex Ping icon () to open Lorex Ping.
3. Register your product using the Lorex Ping app by following the on-screen instructions.
4. Press **Wifi Setup** then tap **Next**.

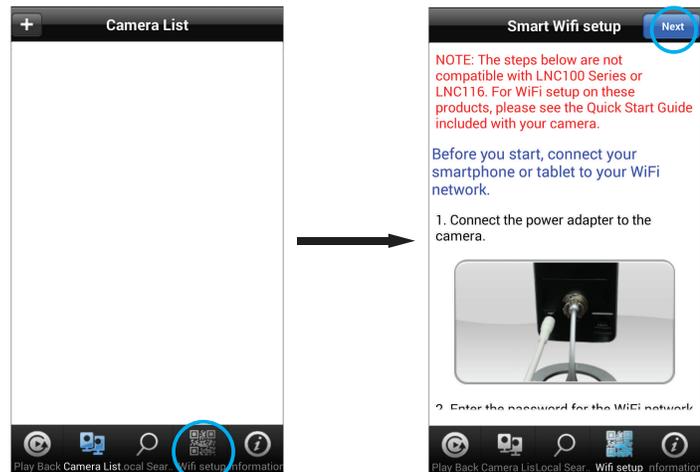


5. Enter the password for your WiFi network and press **OK**. A QR code appears on the screen with your WiFi network details.

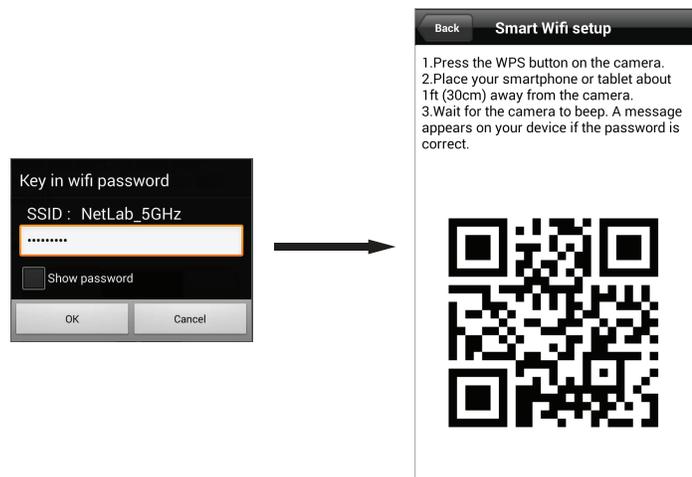

-
6. Press the **WPS** button on the camera. The LEDs will start flashing.

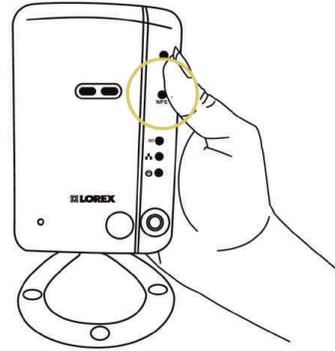

7. Place your device about 1ft (30cm) away from the camera.

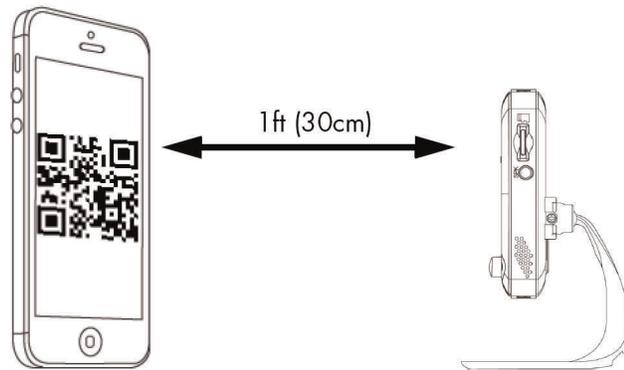


The camera scans the QR code on your Android™ to connect to the WiFi network. When the connection is successful, the camera beeps, and the “Camera Found” message below appears on your device after a few seconds.

8. Enter a name for your camera and press **OK**.




9. Tap the camera to connect.

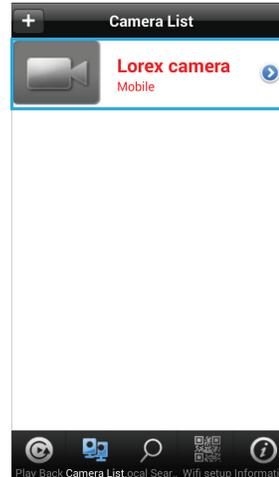

10. If this is the first time connecting to the camera, you will be prompted to create your own password. Tap **OK**.



11. Under **New password**, enter a new password for the camera and repeat the password under **Confirm password**. Tap **OK**.

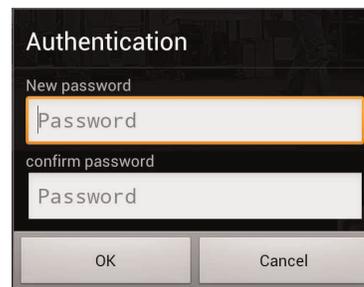

Tap the name of the camera in Camera List again to connect to the camera. Lorex Ping streams live video from your camera.

8.2 Ethernet Setup

1. Tap the Lorex Ping icon () from the home screen or app list to open Lorex Ping.
2. Register your product using the Lorex Ping app by following the on-screen instructions.


3. From the Camera List, tap + to add a camera.



4. Enter the following information:

- 4.1. Under **Camera Name**, enter a name for your camera. This can be anything of your choice.
- 4.2. Under **ID**, press the QR code button  and line up the QR code printed on the back of the camera using the camera on the Android™ phone or tablet. The CamID will automatically be entered.
- **OR:** Manually enter the CamID printed on the camera.
- 4.3. Under **Password**, enter the camera password. If this is the first time connecting to the camera, enter **lorex**. Press **OK**.


5. Tap the name of the camera in the Camera List to connect to the camera. Lorex Ping connects to the camera.

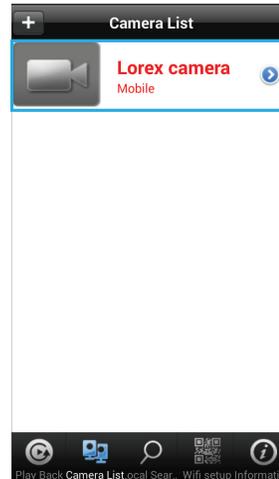

6. If this is the first time connecting to the camera, you will be prompted to create your own password. Tap **OK**.



7. Under **New password**, enter a new password for the camera and repeat the password under **Confirm password**. Tap **OK**.

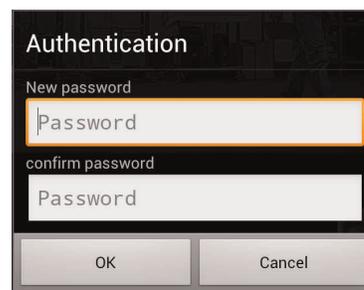

8. Tap the name of the camera in Camera List again to connect to the camera. For details on using the Android™ app, see 15 *Android™ App*, page 111.

Connecting to Your Camera on PC

Follow the steps below to get up and running on a PC. Ensure you have completed the appropriate physical setup detailed in 4 *Getting Started*, page 5 before you start.

- For instructions on setting your camera up for WiFi, see 9.2 *PC WiFi Setup*, page 26.

9.1 Connecting to Your Camera on PC



NOTE

For PC system requirements, see 11.1 *System Requirements*, page 35.


1. Install the L-View software from the CD or download it from www.lorextechnology.com.
2. Double-click the L-View icon  to run L-View.

Connecting to your camera over the local area network (LAN):

1. When L-View opens, it scans the local network for connected cameras. Connected cameras are shown under Auto Search.
2. Double-click the camera under Auto Search **OR** click and drag the camera to a desired screen on the display grid to connect to the camera.



3. Enter the camera password. If this is the first time connecting to the camera, the password is **lorex**. Click **OK**.
4. If you have connected to this camera before, L-View connects to the camera. If this is the first time connecting to the camera, L-View will prompt you to create your own password for the camera. Click **OK**.

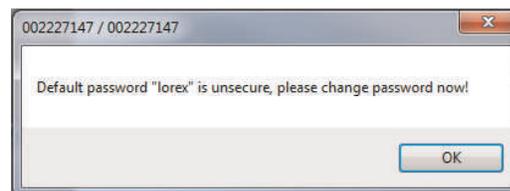


- Under **New Password**, enter a password that will be used for the camera. Under **Confirm Password**, enter the password again. Click **OK**.




- Double-click the camera again under Auto Search to connect. Enter the new password for the camera then click **OK** to connect. L-View connects to the camera. If you would like to save the camera password in L-View, see 11.3.2 *Saving Camera Passwords*, page 39.

Connecting to a Camera Over the Internet (PC)

- Double-click the L-View icon  to run L-View.
- Click + next to Camera List.

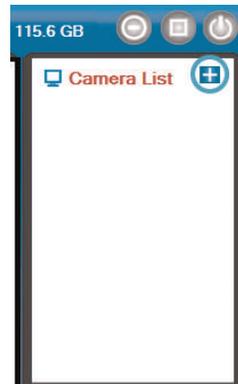


- Enter the following information:

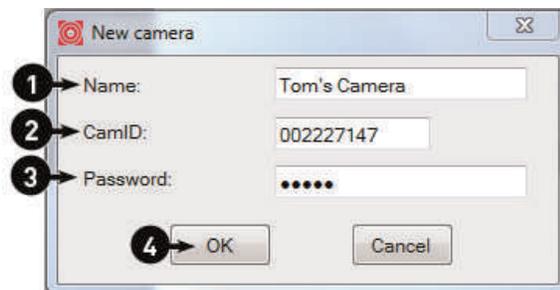


- Under **Name**, enter a camera name of your choice.
 - Under **CamID**, enter the Cam ID number printed on the camera.
 - Under **Password**, enter the camera password. If this is the first time connecting to the camera, the password is **lorex**.
 - Click **OK**.
- Double-click the camera or drag the camera to a display screen to connect to the camera.

- If you have connected to this camera before, L-View connects to the camera. If this is the first time connecting to the camera, L-View will prompt you to create your own password for the camera. Click **OK**.

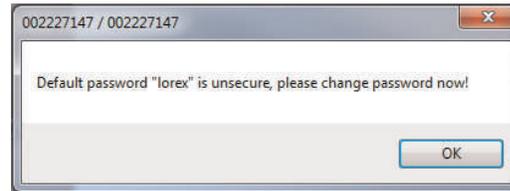

- Under **New Password**, enter a password that will be used for the camera. Under **Confirm Password**, enter the password again. Click **OK**.




- Double-click the camera again under Camera List to connect. For detailed instructions on using L-View, see 11 *L-View for PC*, page 35.

9.2 PC WiFi Setup

The camera must be connected to your router using an Ethernet cable before you can set it up to use WiFi.

- Install L-View on a PC in your local network (must be connected to the same router as the camera) and connect to the camera.
- Right-click on the camera ID in the Auto Search area and click **Web Configure**.

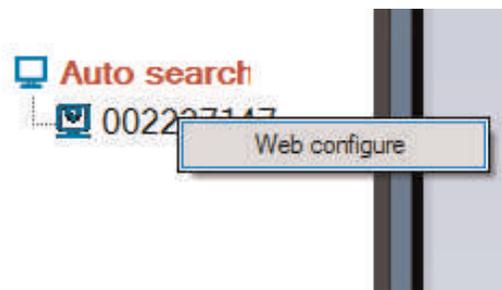

- Enter the camera admin user name and password. By default, the admin user name is **admin** and the admin password field is **left blank**. Click **Log in**. The Web Configure interface opens in your default web browser.



NOTE

Your camera admin user name and password differs from the password used to connect to your camera to view video.

- Click on **Network** and then **WiFi Security**.

5. Click **WiFi Scan** and select your WiFi network from the list.

The screenshot shows the 'WiFi Security Settings' form. At the top, there are two radio buttons: 'Enable WiFi function' (unselected) and 'Disable WiFi function' (selected). Below are several input fields: 'SSID' (empty), 'Security mode' (radio buttons for 'None', 'WEP', and 'WPA(2)-PSK(WPA personal)' with 'WPA(2)-PSK(WPA personal)' selected), 'WEP Encryption' (dropdown menu showing '64 bits(10 hex digits)'), 'WEP Key' (text box with '1234567890'), 'WPA Encryption' (dropdown menu showing 'TKIP'), and 'WPA-PSK Key' (empty text box). At the bottom, there are four buttons: 'Save & Apply', 'IP address', 'WiFi test', and 'WiFi Scan'. The 'WiFi Scan' button is circled in blue.



The screenshot shows a network selection screen. On the left, there is a logo for 'OpenWrt' circled in blue. On the right, under the heading 'Properties', there is a signal strength indicator and the text '802.11b/g/n 54Mbps WPA'.

6. Under **WPA-PSK Key** or **WEP Key**, enter the WiFi password. Click **Save & Apply**.

The screenshot shows the 'WiFi Security Settings' form after the scan. The 'Enable WiFi function' radio button is now selected. The 'SSID' field contains 'belkin.5f4'. The 'Security mode' radio buttons are 'None', 'WEP', and 'WPA(2)-PSK(WPA personal)' with 'WPA(2)-PSK(WPA personal)' selected. The 'WEP Encryption' dropdown is '64 bits(10 hex digits)', 'WEP Key' is '1234567890', 'WPA Encryption' is 'TKIP', and 'WPA-PSK Key' is empty. At the bottom, the 'Save & Apply' button is highlighted with a blue border.

7. Click **WiFi Security** again and click **WiFi Test** (this may take up to 60 seconds)



The screenshot shows the 'WiFi Security Settings' window. At the top, there are radio buttons for 'Enable WiFi function' (selected) and 'Disable WiFi function'. Below this, there are several input fields: 'SSID' with the value 'belkin.5f4', 'Security mode' with radio buttons for 'None', 'WEP', and 'WPA(2)-PSK(WPA personal)' (selected), 'WEP Encryption' with a dropdown menu set to '64 bits(10 hex digits)', 'WEP Key' with the value '1234567890', 'WPA Encryption' with a dropdown menu set to 'TKIP', and 'WPA-PSK Key' with an empty input field. At the bottom, there are four buttons: 'Save & Apply', 'IP address', 'WiFi test' (circled in blue), and 'WiFi Scan'.



The screenshot shows a 'WiFi testing status' dialog box. It has a title bar 'WiFi testing status'. Below the title bar, there is a text field containing 'Status test success !'. Below the text field, there is a message: 'If testing failed, please check the settings.' At the bottom right of the dialog box, there is an 'OK' button.

8. When successful, **Status** will say **Test Success**. If unsuccessful, double check your wireless password and make sure your camera is close enough to the wireless router to get a good signal.
9. Remove the Ethernet cable from the camera, wait 60 seconds, and then reconnect to your camera in L-View.

Connecting to Your Camera on Mac

Follow the steps below to get up and running on a Mac computer. Ensure you have completed the appropriate physical setup detailed in 4 *Getting Started*, page 5 before you start.

- For instructions on setting your camera up for WiFi, see 10.2 *Mac WiFi Setup*, page 32.


10.1 Connecting to Your Camera on a Mac



NOTE

For Mac system requirements, see 12.1 *System Requirements*, page 54.

1. Install the L-View software from the CD or download it from www.lorextechnology.com.
2. Extract the installer file and double-click it to run.
3. Click and drag the L-View icon to **Applications** to install.

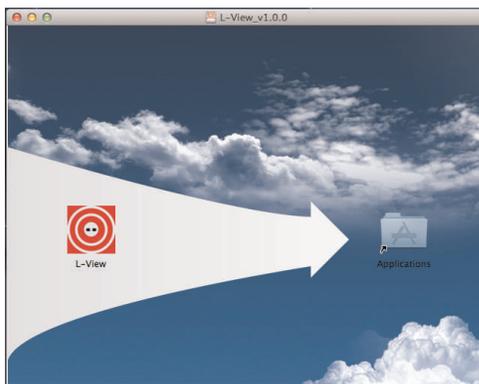


Connecting to your Camera on the Local Network (Mac)



NOTE

Your computer must be on the same network as the camera to perform the steps below.

1. Open L-View () from your Applications list. L-View scans for cameras on your local network.
2. Double-click the camera ID.

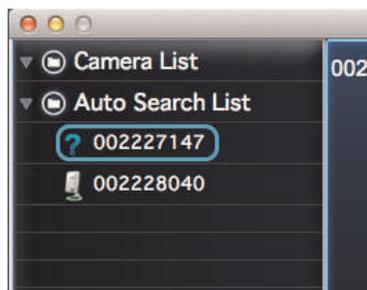

3. Enter the password (default: **lorex**) and then click **OK** to connect. L-View connects to your camera and streams live video.



4. If this is the first time connecting to the camera, you are prompted to change your password. Click **OK**.



5. Enter a new password and click **OK**.
6. Double-click the camera ID under Auto Search again, enter the new password, and click **OK**. L-View connects to your camera and streams live video.

TIP: To save the camera password in L-View, click and drag the ID from the **Auto Search List** to the **Camera List**. Then, right-click the ID and click **ID/Password settings**. Enter the camera password. If you want, you can also enter a name of your choice for your camera under **Camera Name**. Click **OK**.



Click and drag camera ID from Auto Search List to Camera List




Right-click the camera ID in the Camera List and select **ID/Password settings**



Enter a name of your choice. Enter the camera password and click **OK**

Connecting to your Camera over the Internet (Mac)


1. Right-click **Camera List** and then click **New camera**.

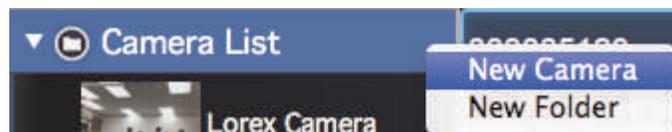

2. Enter the following information:




- 2.1. Under **Camera Name**, enter a name for your camera of your choice.
 - 2.2. Under **Camera ID**, enter the CamID number printed on the label on the back of your camera.
 - 2.3. Under **Password**, enter the camera password (default: **lorex**).
 - 2.4. Click **OK**.
3. Double-click the camera to open it in L-View.



4. If this is the first time connecting to the camera, you are prompted to change your password. Click **OK**.




5. Enter a new password and click **OK**. L-View connects to your camera and streams live video. For more details on using L-View for Mac, see 12 *L-View for Mac*, page 54.

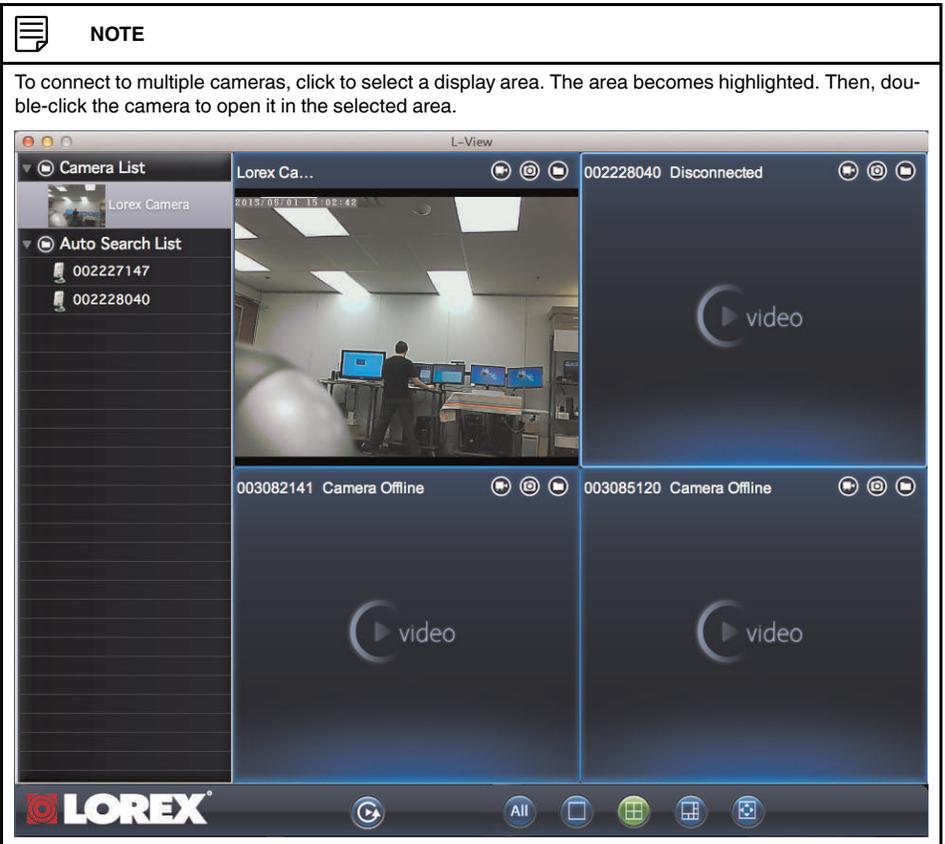

10.2 Mac WiFi Setup

The camera must be connected to your router using an Ethernet cable before you can set it up to use WiFi.

1. Install L-View on a Mac in your local network (must be connected to the same router as the camera) and connect to the camera.
2. Right-click on the camera ID in the Auto Search area and click **Web Configure**.

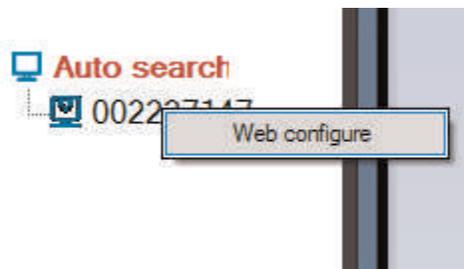

3. Enter the camera admin user name and password. By default, the admin user name is **admin** and the admin password field is **left blank**. Click **Log in**. The Web Configure interface opens in your default web browser.

NOTE

Your camera admin user name and password differs from the password used to connect to your camera to view video.

4. Click on **Network** and then **WiFi Security**.
5. Click **WiFi Scan** and select your WiFi network from the list

WiFi Security Settings

Enable WiFi function Disable WiFi function

SSID:

Security mode: None WEP WPA(2)-PSK(WPA personal)

WEP Encryption: 64 bits(10 hex digits)

WEP Key: 1234567890

WPA Encryption: TKIP

WPA-PSK Key:

Buttons: Save & Apply, IP address, WiFi test, **WiFi Scan** (circled)



ESSID: **OpenWrt** (circled)

Properties: 802.11b/g/n 54Mbps WPA

6. Under **WPA-PSK Key** or **WEP Key**, enter the WiFi password. Click **Save & Apply**.

WiFi Security Settings

Enable WiFi function Disable WiFi function

SSID: belkin.5f4

Security mode: None WEP WPA(2)-PSK(WPA personal)

WEP Encryption: 64 bits(10 hex digits)

WEP Key: 1234567890

WPA Encryption: TKIP

WPA-PSK Key:

Buttons: **Save & Apply**, IP address, WiFi test, WiFi Scan

7. Click **WiFi Security** again and click **WiFi Test** (this may take up to 60 seconds).



The screenshot shows the 'WiFi Security Settings' window. At the top, there are radio buttons for 'Enable WiFi function' (selected) and 'Disable WiFi function'. Below this, there are several fields: 'SSID' with the value 'belkin.5f4', 'Security mode' with radio buttons for 'None', 'WEP', and 'WPA(2)-PSK(WPA personal)' (selected), 'WEP Encryption' with a dropdown menu showing '64 bits(10 hex digits)', 'WEP Key' with the value '1234567890', 'WPA Encryption' with a dropdown menu showing 'TKIP', and 'WPA-PSK Key' with an empty text box. At the bottom, there are four buttons: 'Save & Apply', 'IP address', 'WiFi test' (circled in blue), and 'WiFi Scan'.



The screenshot shows a 'WiFi testing status' dialog box. It has a title bar 'WiFi testing status'. Below the title bar, there is a text field with the value 'test success!'. Below the text field, there is a message: 'If testing failed, please check the settings.' At the bottom right, there is an 'OK' button.

8. When successful, **Status** will say **Test Success**. If unsuccessful, double check your wireless password and make sure your camera is close enough to the wireless router to get a good signal.
9. Remove the Ethernet cable from the camera, wait 60 seconds, and then reconnect to your camera in L-View.

L-View is a PC client software that supports up to 4 cameras. L-View is provided on the CD or available as a free download from www.lorextechology.com.

For instructions on installing and connecting to your camera using L-View, see 9 *Connecting to Your Camera on PC*, page 24.



NOTE

For Mac software instructions, see 12 *L-View for Mac*, page 54.

11.1 System Requirements

Description	Minimum System Requirements
CPU	2.0 GHz (dual-core recommended)
Memory	2GB
Operating System	Windows XP SP 2 and higher Windows 7 Basic, Home Premium, Ultimate Windows 8
Hard Drive	Minimum 5~10 GB free for recordings and snapshots

11.2 L-View for PC Interface



-
1. **Display:** Shows live or recorded video from your camera(s).
 - Click to select a camera and scroll up/down to zoom in/out. When the camera is zoomed in, click and drag the camera image to pan the camera.
 - Double-click to open the display area in full-screen. Double-click again to exit full-screen.
 - Right-click to open the display sub-menu. See 11.2.1 *Display Sub-Menu*, page 37.
 2. **Image/Recording Controls:**
 -  **Video Settings:** Click to edit the camera's video settings. See 11.7 *Configuring Camera Video Settings*, page 46.
 -  **microSD:** Click to open a list of recordings saved on the camera's microSD card (not included). See 11.6 *Playing Back Recordings on the microSD card with L-View*, page 45.
 -  **Snapshot:** Click to save a still image screenshot of the camera. To access Snapshots, see 11.8.1 *Directories (Opening or Changing the Snapshot/Recording Folder)*, page 50. Snapshots are saved in .png format.
 -  **Record:** Click to start/stop manual recording. For details, see 11.4 *Recording to Your PC's Hard Drive*, page 42.
 3. **Time and Date:** Show the current time and date on the computer. Note that the camera time and date may differ. For instructions on setting the time and date on the camera, see 16.6.3 *Date/Time*, page 143.
 4. **Minimize/Restore**
 5. **Maximize/Revert to Window**
 6. **Exit**
 7. **Camera List:** Shows list of saved cameras. Available cameras are in blue. Cameras in red are not available. If a camera appears in red, check the network connection. For more details, see 11.3 *Camera List (Managing Cameras)*, page 38.

**NOTE**

Cameras may appear in red before you have connected to them the first time.

8. **Auto Search:** Auto Search shows cameras located on your local network (LAN).
 - Double-click the camera name or click and drag the camera to the display area to view the camera.
 - Drag the camera to the Camera List to save the camera.
 - Right-click the camera ID and select Web Configure to configure the camera settings using a browser. See 16 *Configuring Camera Settings Using a Browser*, page 131.
9. **Pan/Tilt/Zoom Controls:** Controls for compatible PTZ cameras (not included).

10. Volume Controls:

- Click  to activate 2-way-audio (intercom) feature and click again to deactivate 2-way-audio. Note that turning on 2-way-audio will mute audio from the camera.
- Click  to mute audio from the camera. Click again to unmute audio from the camera.
- Use the top volume slider to control the volume for the camera speaker (not included) when the 2-way-audio is activated.
- Use the bottom volume slider to control the volume of audio coming from the camera.

11. L-View Controls:

-  **L-View Settings:** Click to open settings for L-View. See 11.8 *Configuring L-View*, page 50.
-  **L-Play:** Click to open L-Play to view video files saved on your computer hard drive. See 11.6 *Playing Back Recordings on the microSD card with L-View*, page 45.
-  **Language Selector:** Click to select the language for L-View.


12.  **All Camera Action:** Click to perform an action on all cameras.

13.   **Split-Screen Selectors:** Click  to select single camera view or  to select 4-camera view.

14.  **Full Screen:** Click to open the camera display area in full-screen. Press **ESC** to exit full-screen.

11.2.1 Display Sub-Menu


The Display sub-menu opens when you right-click on a camera's display area. It contains additional camera controls.

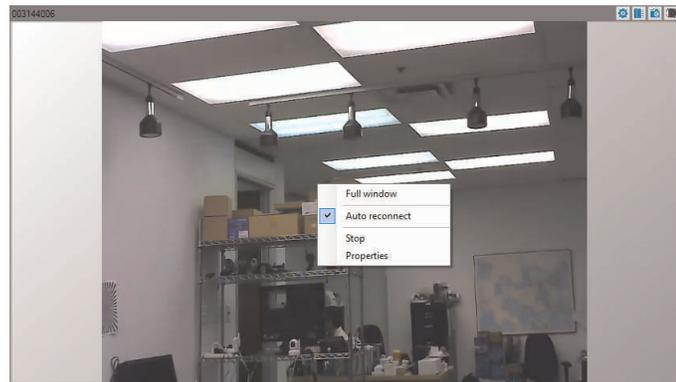

The Display sub-menu contains the following controls:

- **Full window:** Open the camera in single camera view.
- **Auto reconnect:** L-View will attempt to reconnect to the camera if it becomes disconnected.
- **Stop:** Disconnect from the camera.


- **Properties:** Click to view video properties.

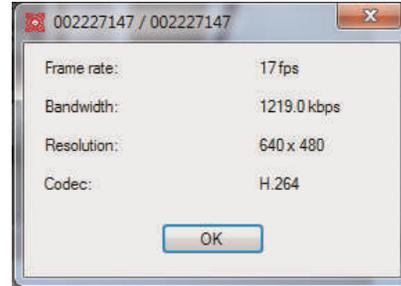

Video Properties

11.2.2 All Camera Action

Press  to open the All Camera Action menu.

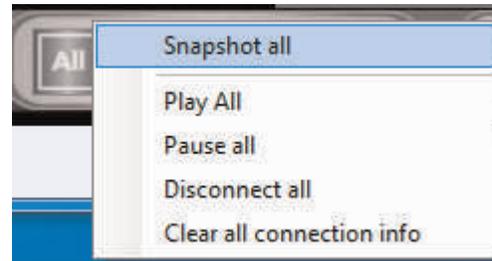

The All Camera Action Menu contains the following controls:

- **Snapshot all:** Take a snapshot from all connected cameras.
- **Play all:** Connect to all cameras selected in display grid.
- **Pause all:** Pause video for all connected cameras. Click Pause all again to resume video.
- **Disconnect all:** Disconnect from all connected cameras.
- **Clear all connection info:** Remove all cameras from the display grid.

11.3 Camera List (Managing Cameras)

The Camera List is used to save connection information for your cameras, so you don't have to re-enter the ID or password each time you connect. The Camera List also allows you to configure certain camera settings.

Cameras connected to the Internet or local network are shown in blue in the camera list. Cameras not connected are shown in red. If your camera is red, check the network connection.



NOTE


Cameras may appear in red before you have connected to them the first time.

11.3.1 Adding Cameras to Camera List

- If the camera is on the local network, click and drag a camera from the Auto Search list to Camera List to add it.



- If the camera is not on the local network (i.e. you are connecting to it over the Internet), see 9 *Connecting to Your Camera on PC*, page 24 to add the camera to the Camera List.
- Right-click on your camera to open the Camera List sub-menu. See below for instructions.

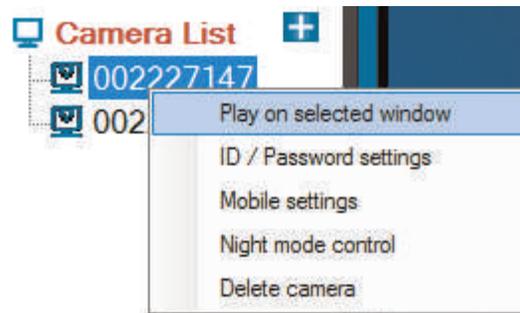

11.3.2 Saving Camera Passwords

You can use the Camera List sub-menu to save the camera's password in L-View, so you don't have to enter the password to connect to the camera.



NOTE

To change the camera's password, see 16.3.1 *Video Settings*, page 133.

To save the camera password:


1. Right-click on the camera in Camera List and click **ID/Password settings**.



2. Under **Name**, enter a name for the camera that will appear in Camera List. This can be anything of your choice.
3. Under **Password**, enter the camera password to save the password in L-View.
4. Click **OK**.

11.3.3 Deleting Cameras


1. Right-click on the camera in Camera List and click **Delete Camera**.

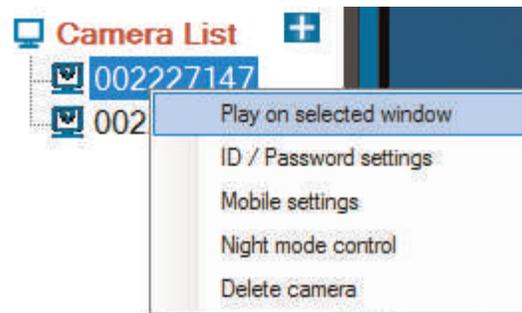

2. Click **Delete** to confirm.

11.3.4 Configuring Mobile Streaming Settings

Configure streaming settings when connecting using a smartphone or tablet.

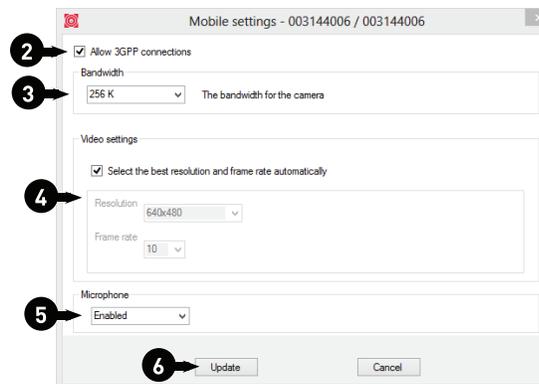


To configure mobile streaming settings:

1. Right-click on the camera you want to configure and click **Mobile settings**.

2. Ensure **Allow 3GPP connections** is checked. If this setting is unchecked you will not be able to connect to the camera with a smartphone or tablet.
3. Under **Bandwidth**, select your available mobile bandwidth. If you are primarily connecting using WiFi, you may set this setting higher.
4. Check **Select resolution and frame rate automatically** to have the camera automatically select the resolution and frame rate based on available bandwidth. If you leave this unchecked, configure the following:
 - Under **Resolution**, select the resolution that will be used when connecting to the camera using a smart phone or tablet: **320x240**, **480x360**, **640x400**, or **1024x768**.
 - Under **Frame rate**, select the frame rate that will be used when connecting to the camera using a smart phone or tablet between **30fps** (highest) and **1fps** (lowest).
5. Under **Microphone**, select **Enable** to enable audio streaming to smart phones and tablets or **Disable** to disable audio streaming to smartphones and tablets.
6. Click **Update** to apply changes to your camera. Enter the admin user name (default: **admin**) and password (default: **left blank**) for the camera and click **OK**.
7. The camera will disconnect when the setting is changed. Double-click the camera in Camera List to reconnect.

11.3.5 Configuring Night Mode Control

Configure when the camera uses day or night mode. When day mode is on, the camera sees in color. When night mode is on, the camera sees in black and white, and the Infrared LED turns on to enable night vision.

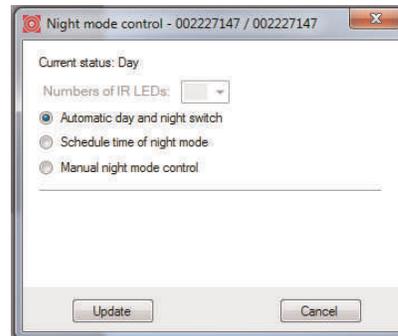


To configure night mode settings:


1. Right-click on the camera you want to configure and select **Night mode control**.

2. Select one of the following:

- **Automatic day and night mode switch:** Camera will automatically switch between day mode or night mode, based on the amount of light in the room.
- **Scheduled time of night mode:** Camera will switch between day mode and night mode at a scheduled times each day. If using this option, use the first set of drop-down menus to select (in 24-hour time) the time the camera will switch to night mode and the second set of drop-down menus to select when the camera will return to day mode.

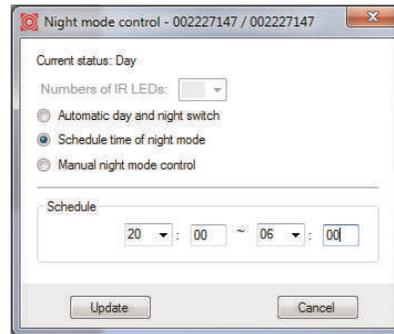

- **Manual night mode control:** Manually select day mode or night mode. If using this option, under **Mode**, select **Day** for day mode or **Night** for night mode.

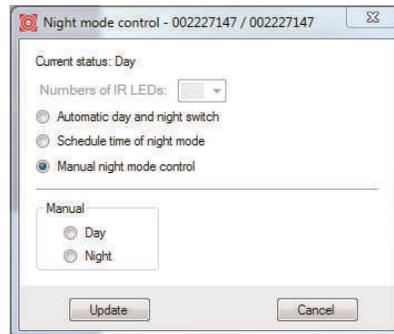

3. Click **Update** to apply changes to your camera. Enter the admin user name (default: **admin**) and password (default: **left blank**) for the camera and click **OK**.
4. The camera will disconnect when the setting is changed. Double-click the camera in Camera List to reconnect.

11.4 Recording to Your PC's Hard Drive

You can manually record video to your computer hard drive.

To record to your computer's hard drive:

- Click  above the camera's video area to start recording. The recording icon will turn red (.
- Click  again to stop recording. To playback video, see 11.5 *L-Play: Playing back Video from your PC's Hard Drive*, page 43.




11.5 L-Play: Playing back Video from your PC's Hard Drive


L-Play is used to playback video files saved to your computer's hard drive. L-Play is installed automatically when you install L-View.

To playback video saved to your computer's hard drive:


1. Record some video using the steps above if you have not done so already.
2. Click the L-Play icon () to open L-Play.
3. Click **Open Record**.

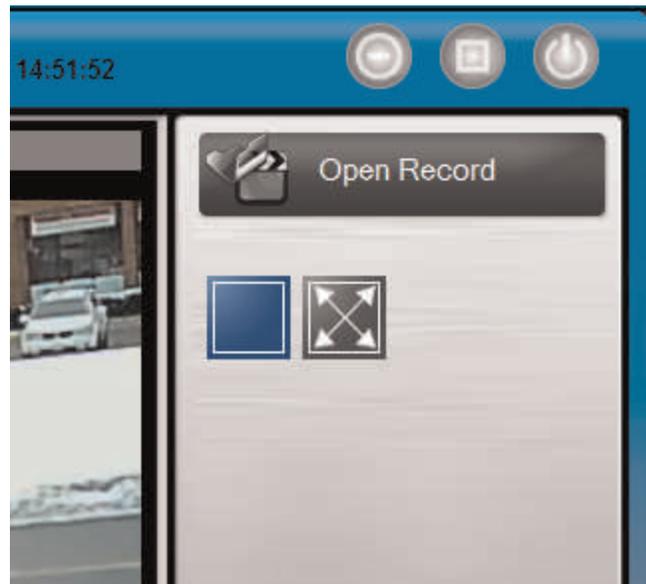

4. Use the Recorded Files area to find the day you would like to playback from.
 - Click + next to a year to expand recordings for the year.
 - Click + next to a month to expand recordings for that month.
 - Click a day to select it.

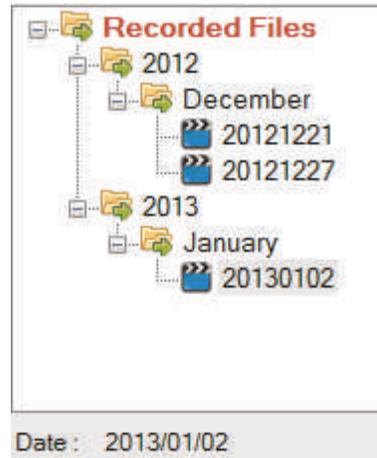

5. Click the ID of the camera you would like to playback video from and then click **Play**.

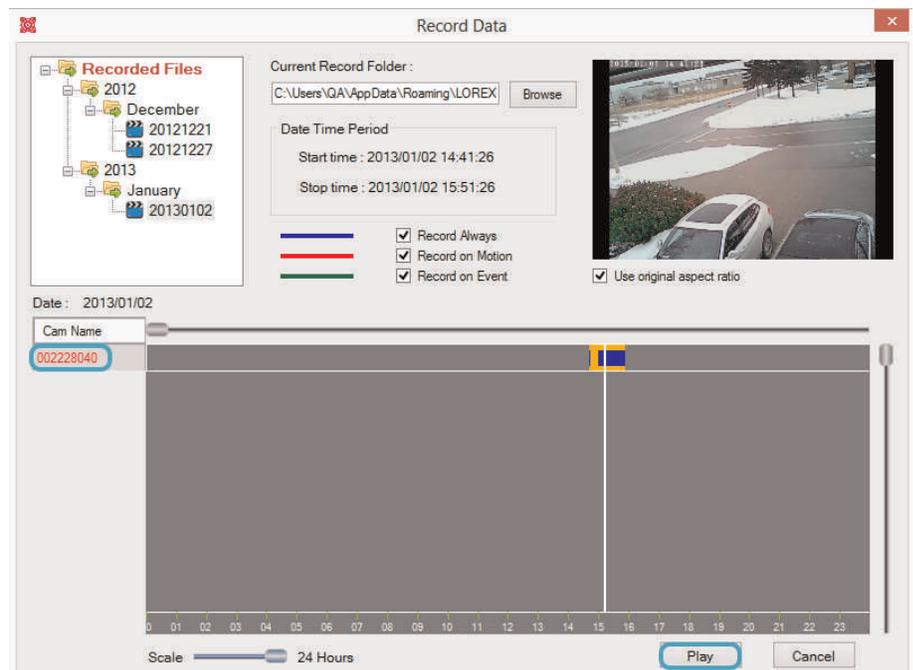

6. Use the on-screen controls to control playback.



- 6.1. Minimize window
- 6.2. Maximize window
- 6.3. Exit
- 6.4. Search for video
- 6.5. Open in full-screen
- 6.6. Time video was recorded
- 6.7. Volume control
- 6.8. Mute
- 6.9. Zoom in
- 6.10. Zoom out

**NOTE**

Once zoomed in, click and drag the mouse to pan the zoom area.


- 6.11. Speed up playback
- 6.12. Playback speed
- 6.13. Slow down playback
- 6.14. Stop
- 6.15. Pause
- 6.16. Play
- 6.17. Seek to different time
- 6.18. Change language

11.6 Playing Back Recordings on the microSD card with L-View


You can use L-View to playback recorded video on the camera's microSD card (required; not included). For instructions on setting up recording on the microSD card, see 16.4.3 *SD Card (Configuring microSD Recording)*, page 138.

To playback recorded video on the microSD card:

1. Connect to the camera you would like to playback recordings from.
2. Click the **microSD button** () on top of the camera display area. Enter the camera password if required.
3. A list is created of all days with recordings available in the format *yyyymmdd* (for example, *20120730* is *July 30, 2012*).

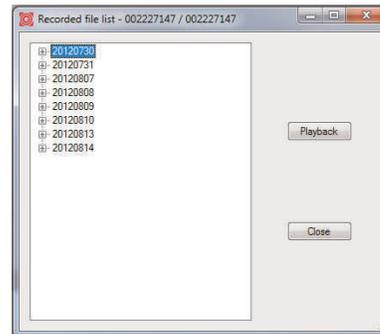

4. Click the **+** next to a day to view recordings from that day. Recordings from that day are shown from earliest to latest. Recordings are named according to the time they were recorded with the format *hhmmss* (for example, *115553* is *11:55:53 AM*).
5. Click a recording from the list and then click **Playback** to view it.

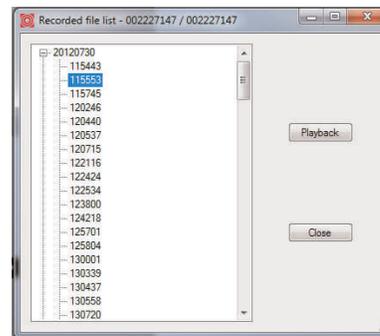

6. The recording plays back in the camera display area.
 - To return to a live view of your camera, wait for the recording to finish, then right-click and select **Play**.
 - **OR**, while the recording is still playing, right-click in the display area and select **Stop** then right-click again and select **Play**.

11.7 Configuring Camera Video Settings

The Video Settings menu allows you to adjust the quality of the camera video.

To open the Video Settings menu:


- Click  on the top of the display area for the camera you would like to configure.

**NOTE**

The camera will disconnect after making changes to video settings. Wait about 15 seconds after clicking **Update** and double-click the camera in Camera List or Auto Search to reconnect to the camera.

TIP: Change only one camera image quality setting at a time before clicking **Update** so you can judge the effects.

11.7.1 Quality Tab (Configuring Resolution, Frame Rate, and Bandwidth)

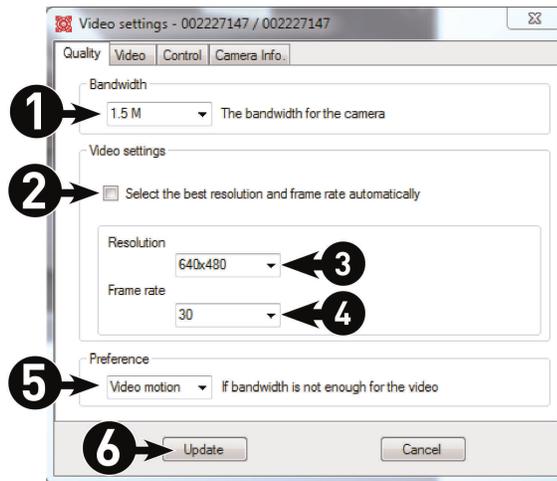

The Quality tab allows you to configure image quality settings such as the camera resolution, frame rate, and bandwidth settings.


To configure image quality settings:

1. Under **Bandwidth**, select the upload speed of your Internet connection. If your Internet connection is faster than 1.5Mbps, select 1.5Mbps.
2. Check **Select the best resolution and frame rate automatically** to have the camera automatically adjust the resolution and frame rate based on bandwidth. Or, un-check it to manually configure the resolution and frame rate. If you are manually configuring the resolution and frame rate, configure the following:
 - **Resolution:** Manually select either **320x240** (QVGA), **640x480** (VGA), **1024x768**, or **1280x800** resolution. Higher resolution will give you a better, more detailed picture, but requires more bandwidth. Lower resolution allows the camera to maintain a higher frame rate when available bandwidth is low.
 - **Frame rate:** Manually select the frame rate between **30fps** (highest) and **1fps** (lowest). 30fps is real time video, meaning that movement in the image will appear smooth, with no choppiness.
3. Under **Preference**, select your quality preference when bandwidth increases or decreases:
 - Select **Video Motion** to have the camera maintain the frame rate and reduce image quality when bandwidth is insufficient.
 - Select **Image Quality** to have the camera maintain image quality and reduce frame rate when bandwidth is insufficient.
 - Select **Better Quality** to have the camera maintain frame rate and increase quality when bandwidth is sufficient.
 - Select **Best Quality** to have the camera maintain the frame rate and increase quality to the maximum speed of the connection.

- Click **Update** to save changes. Enter the camera admin user name (default: **admin**) and password (default: **left blank**) and click **OK**. The camera will disconnect. Wait about 15 seconds and then double-click the camera in Camera List or Auto Search to reconnect to the camera.

11.7.2 Video Tab (Configure General Video Settings)


The Video tab allows you to configure general video settings, such as color and brightness settings.

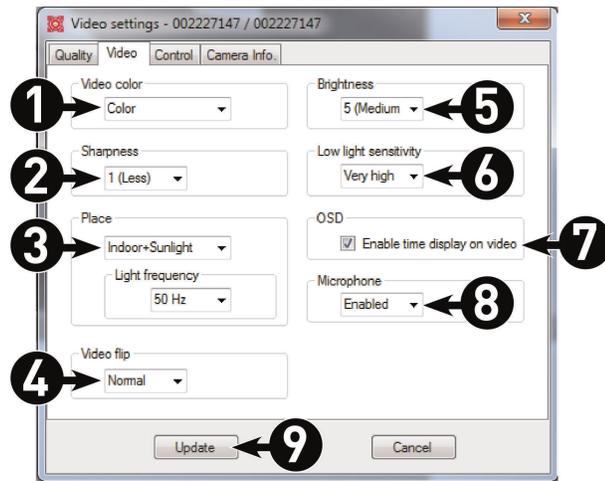

To configure general video settings:

- Under **Video Color**, select **Color** or **Black & White**.
- Under **Sharpness**, select the sharpness of the image between **10** (highest) and **1** (lowest).
- Under **Place**, select **Outdoor video** if the area with the camera is brightly lit. Select **Indoor Video** if you notice strip lines in the image or if the picture is too dark on the Outdoor video setting. Select **Indoor video + Sunlight** if the picture is too bright on the **Indoor Video** setting.
 - If you select **Indoor Video** or **Indoor Video + Sunlight**, select **60Hz** or **50Hz** to adjust the camera for the frequency of your indoor lighting.
- Under **Video Flip**, select **Video Flip** to flip the camera image vertically and horizontally or select **Normal** for normal orientation.
- Under **Brightness**, select the brightness of the image between **10** (highest) and **1** (lowest).
- Under **Low Light Sensitivity**, set the camera's sensitivity in low light environments between **Very High** (highest), **High**, and **Normal** (lowest).
- Check **Enable time display on video** to turn on video time stamps or un-check it to disable video time stamps.
- Under **Microphone**, select **Enabled** to enable the built-in microphone on the camera or select **Disabled** to disable the built-in microphone on the camera.
- Click **Update** to save changes. Enter the camera admin user name (default: **admin**) and password (default: **left blank**) and click **OK**. The camera will disconnect. Wait about 15 seconds and then double-click the camera in Camera List or Auto Search to reconnect to the camera.

11.7.3 Control Tab (Configure Status LED's and Motion Detection Sensitivity)

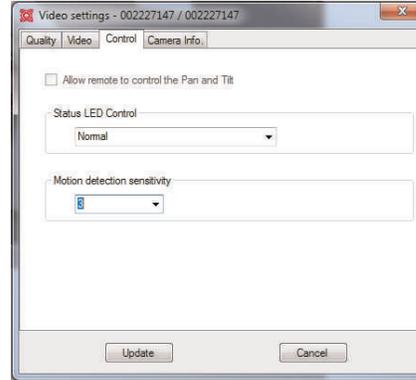

The Control tab allows you to configure the camera status LED's to make the camera harder to spot at night. It also allows you to configure the motion detection sensitivity when using video motion detection.

To configure the camera status LED's:

- Under **Status LED Control**, select one of the following:
 - **Normal:** LED's will function as normal. For details on LED functions, see 3 *Camera Overview*, page 3 or .
 - **Always turn off:** LED's are turned off at all times.
 - **Turn off after connected:** LED's turn on when the camera is powered on and turn off once a network connection is made.
- Click **Update** to save changes. Enter the camera admin user name (default: **admin**) and password (default: **left blank**) and click **OK**. The camera will disconnect. Wait about 15 seconds and then double-click the camera in Camera List or Auto Search to reconnect to the camera.

To configure motion detection sensitivity:




NOTE

The following method works when using video motion detection. It does not work when using PIR motion detection. For details on enabling motion detection and selecting video motion detection or PIR, see 16.4 *Schedule*, page 136.

- Under **Motion Detection Sensitivity**, select the motion detection sensitivity between **1** (High) and **10** (Low). If **Motion Detection Sensitivity** is set to 1, motion detection will be triggered if a moving object is larger than 1% of the video area. If it is set to 10, a moving object must be larger than 10% of the video area to trigger motion detection.
- Click **Update** to save changes. Enter the camera admin user name (default: **admin**) and password (default: **left blank**) and click **OK**. The camera will disconnect. Wait about 15 seconds and then double-click the camera in Camera List or Auto Search to reconnect to the camera.

11.7.4 Camera Info Tab

The camera info tab shows system information about the camera.

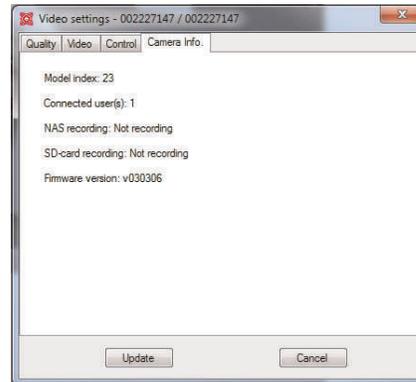


11.8 Configuring L-View

To configure settings for L-View, click the settings button ().

11.8.1 Directories (Opening or Changing the Snapshot/Recording Folder)

The Directories menu shows you the folder where snapshots and video files are saved. It allows you to open or change the Snapshot/Recording folder.

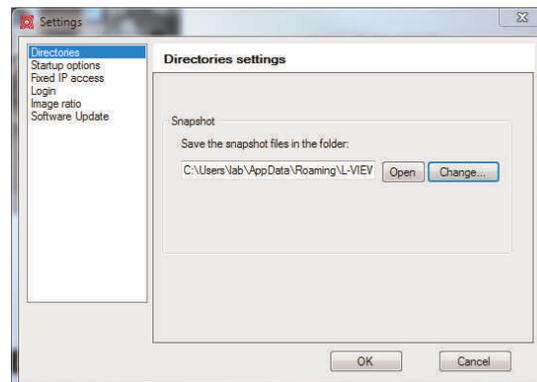

To open the Snapshot folder:

- Click **Open**.

To change the Snapshot folder:


1. Click **Change**.
2. Select a new Snapshot folder and click **OK** to save changes.

11.8.2 Startup Options

The Startup options menu allows you to configure startup options for L-View.

To configure startup options:


1. Check **Automatically start L-View when Windows starts** to have L-View open when your computer is turned on.

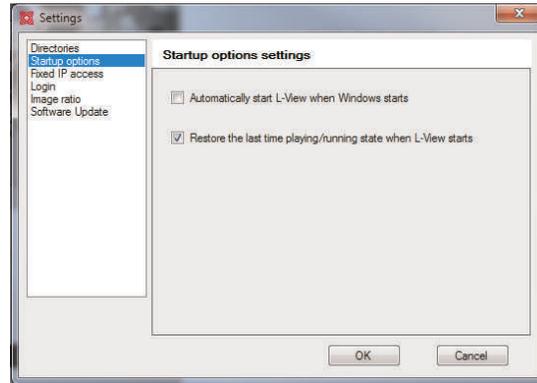

2. Check **Restore the last time playing/running state when L-View starts** to set L-View to restore the camera layout and connect to all the previously open cameras when L-View opens.
3. Click **OK** to save changes.


11.8.3 Fixed IP Access

The Fixed IP Access menu is for advanced users only. It must be used if you have assigned your camera a fixed IP address on your router.

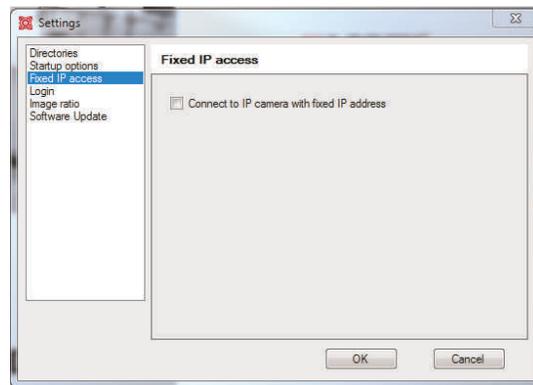
To configure your camera to use a fixed IP address:

1. Check **Connect to the camera with a fixed IP address** to enable cameras to use fixed IP addresses.
2. Click **OK** to save changes.


3. In the camera list, right-click the camera you would like to configure and select **Assign IP Address**.

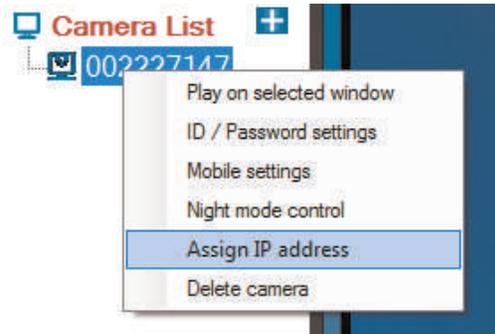

4. Enter the camera's internal IP address and click **OK**.

11.8.4 Login (Enabling a Password to Access L-View)

The Login menu allows you to enable a password to open L-View.

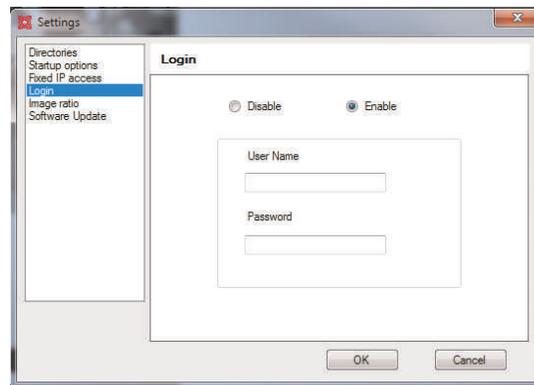


To enable a password for L-View:

1. Select **Enable**.
2. Under **User Name** and **Password**, enter the desired user name and password that must be used when you open L-View.
3. Click **OK** to save changes. The next time you exit L-View and re-open it, it will ask you for a password to log in.

11.8.5 Image Ratio

The Image Ratio menu allows you to configure L-View to preserve the original aspect ratio of the video, or to allow the video to stretch to fill the display area.

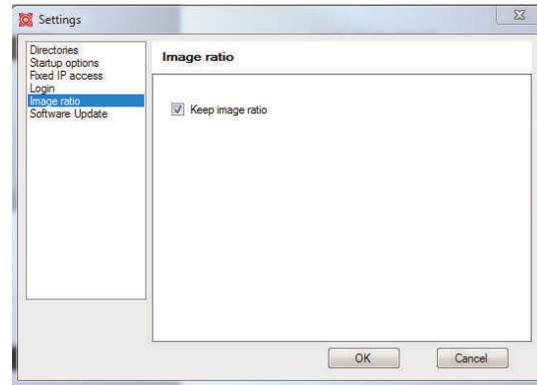


To configure Image Ratio:

1. Check **Keep Image Ratio** to not allow any stretching of the image (bars may appear on the sides of the image). Un-check **Keep Image Ratio** to stretch the image to the entire size of the display.
2. Click **OK** to save changes.

11.8.6 Software Update

The Software Update menu allows you to enable automatic updates of L-View or the camera firmware. It also allows you to manually check for updates.

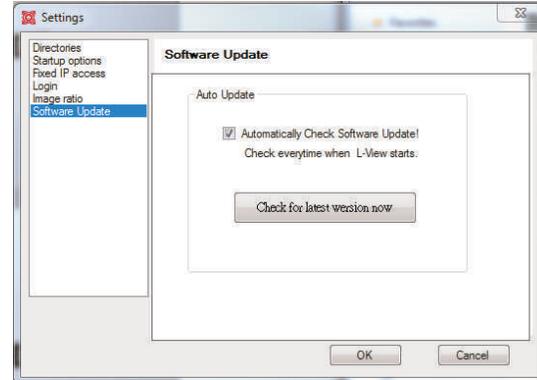

To enable automatic upgrades:

1. Check **Automatically Check Software Update**.
2. Click **OK**. L-View will check online for an software updates when it opens. If an update is available, follow the on-screen instructions to install the update.
 - It will also check for camera updates when a new firmware is available. If a new camera firmware is available, click **OK** and enter the admin user name (default: **admin**) and password (default: **left blank**). Then, wait for the upgrade to complete. **Do not unplug the camera power cable or Ethernet cable during firmware updates**. The camera will reboot during the firmware upgrade process.

To manually check for an update:

1. Click **Check for latest version now**. If an update is available, follow the on-screen instructions to install the update.

L-View for Mac allows you to view your camera on a Mac computer. L-View for Mac is available as a free download from www.lorexttechnology.com.

For instructions on connecting to your camera using Mac, see 10 *Connecting to Your Camera on Mac*, page 29.

12.1 System Requirements

Description	Minimum System Requirements
CPU	2.0 GHz (dual-core recommended)
Memory	2GB
Operating System	OS X 10.6.8 Snow Leopard (Intel Processors only)
Hard Drive	Minimum 5~10 GB free for recordings

12.2 L-View for Mac Interface




1. **Window Controls:** Click to exit or minimize L-View.
2. **Camera List:** Shows cameras that have been saved in L-View. Double-click cameras to connect to them.




NOTE

To connect to multiple cameras, click to select a display area. The selected area is highlighted. Then, double-click the camera to open it in the selected area.

-
3. **Auto Search List:** Auto Search shows cameras located on your local network (LAN).
- Double-click the camera ID to view the camera.
 - Drag the camera to the Camera List to save the camera.
 - Right-click the camera ID and select **Web configure** to configure the camera settings using a browser. See 16 *Configuring Camera Settings Using a Browser*, page 131.

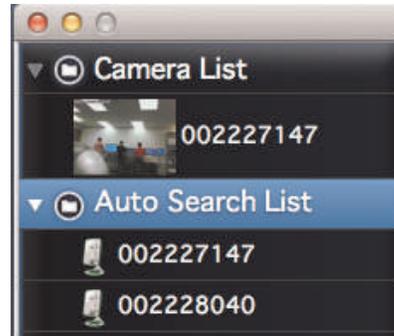

4.  **Playback:** Click to open Playback mode. For details, see 12.4.1 *Playing Back Video from Your Mac's Hard Drive*, page 57.
5.  **All Camera Action:** Click to perform an action on all cameras.
6. **Recording Controls:**
-  **Record:** Click to start/stop manual recording. For details, see 12.4 *Recording Video to Your Mac's Hard Drive*, page 56.
 -  **Snapshot:** Click to take a snapshot from the camera. To view snapshots, click  and select Snapshot folder.
 -  **Folder:** Click to open the recording folder or snapshot folder for this camera.

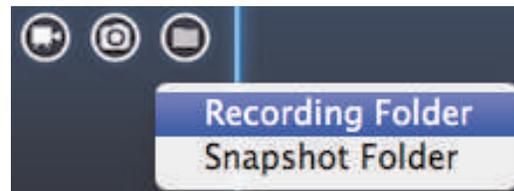

7. **Display Area:** Shows video from your camera.
- Double-click to view the camera in full-screen; double-click again to exit full-screen.
 - Right-click and click **Stop** to close the selected camera.
 - Click a display area to select it. The top of the area turns orange. L-View plays audio from the camera in the currently selected area.

8. Split-screen Controls:

- : Click to open single camera view.
- : Click to open 4-camera view.
- : Click to open 6-camera view.
- : Click to open the current display in full-screen. Press **ESC** to exit full-screen.

12.3 Camera List (Managing Cameras)

The Camera List is used to save connection information for your cameras, so you don't have to re-enter the ID or password each time you connect. It also allows you to configure certain camera settings (see 12.6 *Using Camera List to Modify Camera Settings*, page 59).

12.3.1 Adding Cameras to Camera List

- If the camera is on the same network as the computer, click and drag the ID from the Auto Search List to the camera list. Then right-click the ID and click **ID/Password setting**. Enter the camera password. If you want, you can also enter a Camera Name of your choice for your camera. Click **OK**.



Click and drag camera ID from Auto Search List to Camera List



Right-click and select ID/Password settings




Enter a name of your choice. Enter the camera password and click OK

- If you are adding a camera over the Internet, see .

12.3.2 Deleting Cameras from Camera List

- Right-click the camera in Camera List and select **Delete Camera**. Click **OK** to confirm.

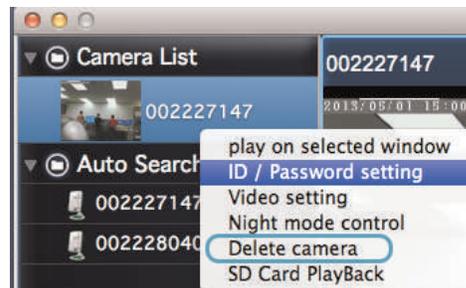

12.4 Recording Video to Your Mac's Hard Drive

You can manually record video to your computer's hard drive.

To record video to your Mac's hard drive:


1. Press the recording button () to start recording. The recording button will turn green during recording.
2. Press the recording button again () to stop recording.

12.4.1 Playing Back Video from Your Mac's Hard Drive

You can playback video files you have saved to your Mac's hard drive in L-View.


To play back video from your Mac's hard drive:

1. Use the instructions above to record some video if you have not done so already.
2. Click the Playback button ()
3. Select the video file you would like to playback.

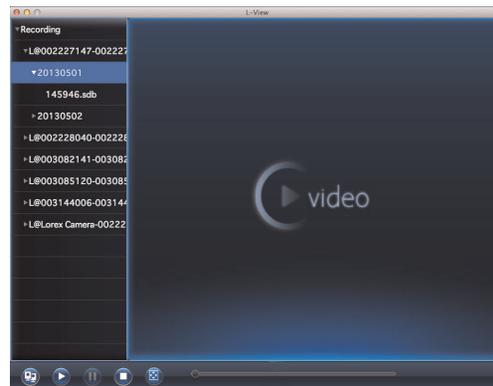
NOTE

Dates are shown using *yyyymmdd* format (e.g. *20121016* is *October 16, 2012*). Video timestamps are shown using *hhmmss* format (e.g. *103045* is *10:30:45am*).

4. Use the on-screen playback controls.

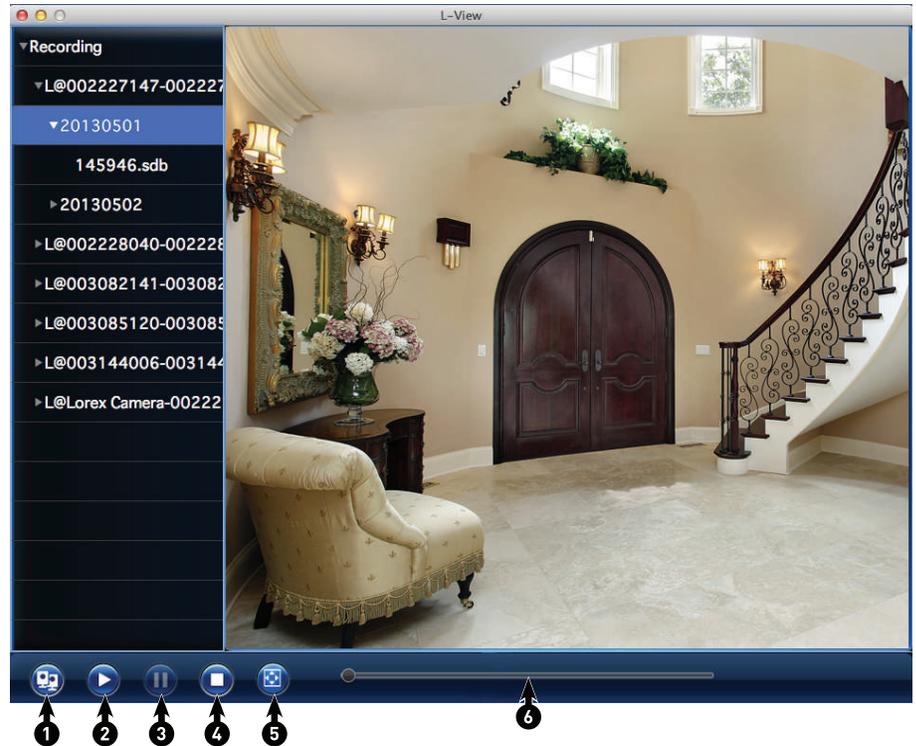


- 4.1. Return to live video
- 4.2. Play
- 4.3. Pause
- 4.4. Stop
- 4.5. Full-screen
- 4.6. Select playback time

12.5 Playing Back Recordings on the microSD card with L-View

You can use L-View to play back recordings on the camera's microSD card (not included). To set up microSD recording, you must use the camera's web configuration tool. For details, see 16.4.3 *SD Card (Configuring microSD Recording)*, page 138.

To play back recordings on the camera's microSD card:

1. Right-click on the camera in Camera List and select **SD Card Playback**.

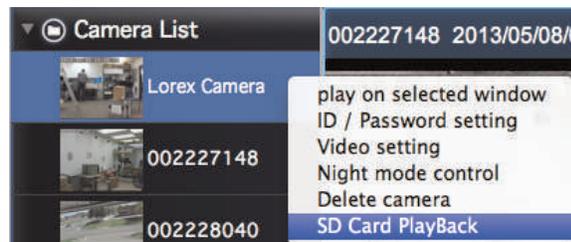

2. Enter the password for the camera and click **OK**. L-View searches for recordings on the microSD card.

- Click the arrow beside a date to view video recorded on that date. Double-click the file you would like to play back.

**NOTE**

Video timestamps are shown using *hhmmss* format (e.g. *103045* is *10:30:45am*).

- To return to live video, close the microSD window and double-click the camera in Camera List.


12.6 Using Camera List to Modify Camera Settings

You can use L-View to configure certain settings for the camera.

TIP: Change only one camera setting at a time before clicking Update so you can judge the effects.


To configure camera settings using Camera List:

- Right-click on the camera in Camera List and select **Video settings** or **Night mode control**. See below for details.

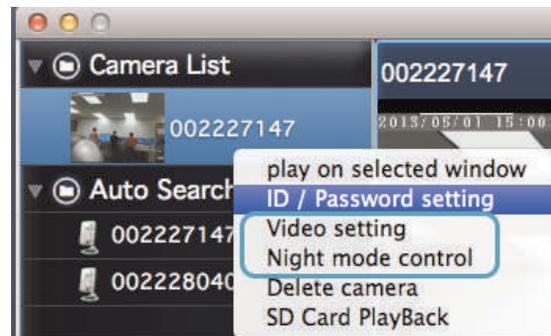

12.6.1 Quality Tab (Configure Bandwidth, Resolution, and Frame Rate)

The Quality tab allows you to configure image quality settings such as the camera resolution, frame rate, and bandwidth settings.

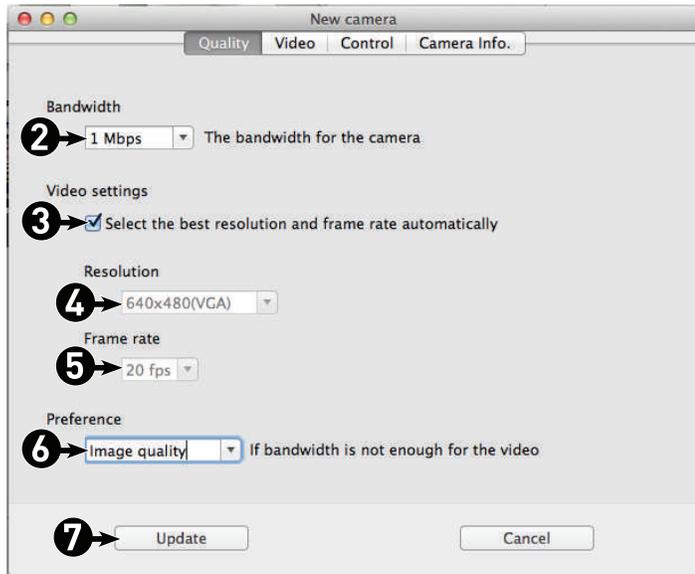

To configure image quality settings:

1. Right-click on the camera in Camera List and select **Video settings**. Select the **Quality** tab.
2. Under **Bandwidth**, select the speed of your Internet connection. If your Internet connection is faster than 3Mbps, select 3Mbps.
3. Check **Select the best resolution and frame rate automatically** to have the camera automatically adjust the resolution and frame rate based on bandwidth. If you set the resolution to adjust automatically, go straight to step 6. Or, un-check it to manually configure the resolution (step 4) and frame rate (step 5).
4. **Resolution:** Manually select either **(640x480) VGA**, **(320x240) QVGA**, **1024x768**, or **1280x800** resolution. Higher resolution settings will give you a better, more detailed picture, but requires more bandwidth. QVGA allows the camera to maintain a higher frame rate when available bandwidth is low.
5. **Frame rate:** Manually select the frame rate between **30fps** (highest) and **1fps** (lowest). 30fps is real time video, meaning that movement in the image will appear smooth, with no choppiness.
6. Under **Preference**, select your quality preference when bandwidth increases or decreases:
 - Select **Video motion** to have the camera maintain the frame rate and reduce image quality when bandwidth is insufficient.
 - Select **Image quality** to have the camera maintain image quality and reduce frame rate when bandwidth is insufficient.
 - Select **Better quality** to have the camera maintain frame rate and increase quality when bandwidth is sufficient.
 - Select **Best quality** to have the camera maintain the frame rate and increase quality to the maximum speed of the connection.
7. Click **Update** to save changes. Enter the camera admin user name (default: **admin**) and password (default: **left blank**) and click **OK**. Click **OK** to close the settings window.




NOTE

The camera may reboot after settings are changed. Wait about 30 seconds and then double-click the camera in Camera List or Auto Search to reconnect to the camera.

12.6.2 Video Tab (Configure General Video Settings)

The Video tab allows you to configure general video settings, such as color and brightness settings.

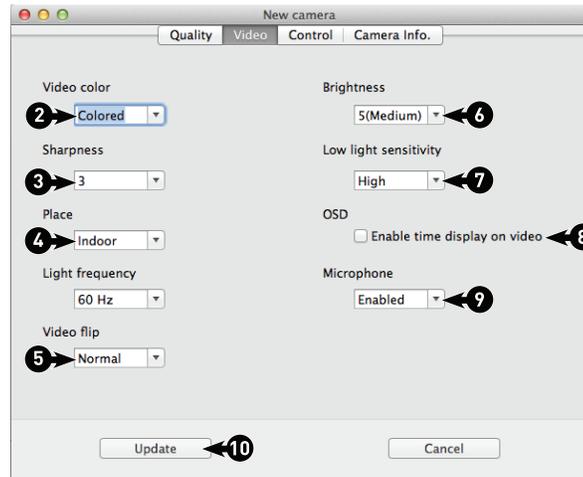

To configure general video settings:

1. Right-click the camera in Camera List and click **Video settings**. Then, select the **Video** tab.
2. Under **Video Color**, select **Colored** or **Black & White**.
3. Under **Sharpness**, select the sharpness of the image between **10** (highest) and **1** (lowest).
4. Under **Place**, select **Outdoor** if the area with the camera is brightly lit. Select **Indoor** if you notice strip lines in the image or if the picture is too dark on the **Outdoor** video setting. Select **Indoor + Sunlight** if the picture is too bright on the Indoor setting.
 - If you select **Indoor** or **Indoor + Sunlight**, select **60Hz** or **50Hz** under **Light Frequency** to adjust the camera for the frequency of your indoor lighting.
5. Under **Video Flip**, select **Flip** to flip the camera image vertically and horizontally or select **Normal** for normal orientation.
6. Under **Brightness**, select the brightness of the image between **10** (highest) and **1** (lowest).
7. Under **Low Light Sensitivity**, set the camera's sensitivity in low light environments between **Very High** (highest), **High**, and **Normal** (lowest).
8. Check **Enable time display on video** to turn on video time stamps or un-check it to disable video time stamps.
9. Under **Microphone**, select **Enabled** to enable the built-in microphone on the camera or select **Disabled** to disable the built-in microphone on the camera.
10. Click **Update** to save changes. Enter the camera admin user name (default: **admin**) and password (default: **left blank**) and click **OK**. Click **OK** to exit the settings window.



NOTE

The camera may reboot after settings are changed. Wait about 30 seconds and then double-click the camera in Camera List or Auto Search to reconnect to the camera.

12.6.3 Control Tab (Configure Status LED's and Motion Detection Sensitivity)

The Control tab allows you to configure the camera status LED's to make the camera harder to spot at night. It also allows you to configure the motion detection sensitivity when using video motion detection.



To configure the camera status LED's:

1. Right-click the camera in Camera List and click **Video settings**. Then, select the **Control** tab.
2. Under **Status LED Control**, select one of the following:
 - **Normal**: LED's will function as normal. For details on LED functions, see 3 *Camera Overview*, page 3 or .
 - **Always turn off**: LED's are turned off at all times.
 - **Turn off after connected**: LED's turn on when the camera is powered on and turn off once a network connection is made.
3. Click **Update** to save changes. Enter the camera admin user name (default: **admin**) and password (default: **left blank**) and click **OK**. Click **OK** to exit the settings window.



NOTE

The camera may reboot after settings are changed. Wait about 30 seconds and then double-click the camera in Camera List or Auto Search to reconnect to the camera.

To configure motion detection sensitivity:



NOTE

The following method works when using video motion detection. It does not work when using PIR motion detection. For details on enabling motion detection and selecting video motion detection or PIR, see 16.4 *Schedule*, page 136.

1. Right-click the camera in Camera List and click **Video settings**. Then, select the **Control** tab.
2. Under **Motion Detection Sensitivity**, select the motion detection sensitivity between **1** (High) and **10** (Low). If Motion Detection Sensitivity is set to 1, motion detection will be triggered if a moving object is larger than 1% of the video area. If it is set to 10, a moving object must be larger than 10% of the video area to trigger motion detection.
3. Click **Update** to save changes. Enter the camera admin user name (default: **admin**) and password (default: **left blank**) and click **OK**. Click **OK** to exit the settings window.




NOTE

The camera may reboot after settings are changed. Wait about 30 seconds and then double-click the camera in Camera List or Auto Search to reconnect to the camera.

12.6.4 Camera Info Tab

The camera info tab shows system information about the camera.

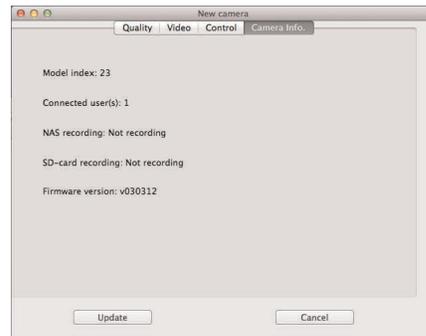


To access the camera info tab:

- Right-click on the camera in Camera List and select **Video Settings**. Then select the **Camera Info** tab.

12.6.5 Configuring Night Mode Settings

Configure when the camera uses day or night mode. When day mode is on, the camera sees in color. When night mode is on, the camera sees in black and white, and the Infrared LED turns on to enable night vision.

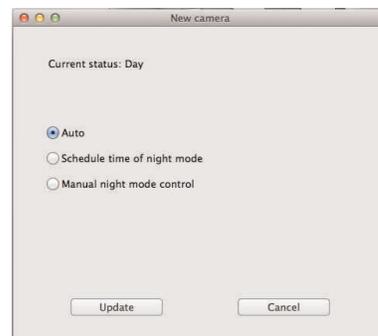


To configure night mode settings:


1. Right-click on the camera you want to configure in Camera List and select **Night mode control**.

2. Select one of the following:

- **Auto:** Camera will automatically switch between day mode or night mode, based on the amount of light in the room.
- **Scheduled time of night mode:** Camera will switch between day mode and night mode at a scheduled time each day. If using this option, use the first set of drop-down menus to select (in 24-hour time) the time the camera will switch to night mode and the second set of drop-down menus to select when the camera will return to day mode.

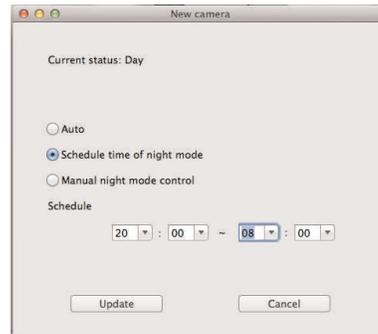

- **Manual night mode control:** Manually select day mode or night mode. If using this option, under **Manual**, select **Day** for day mode or **Night** for night mode.

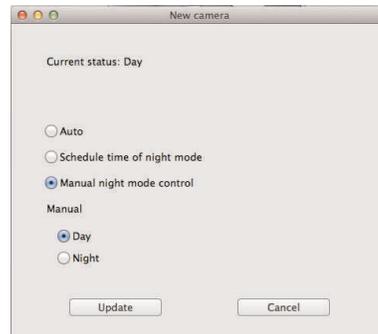

3. Click **Update** to apply changes to your camera. Enter the admin user name (default: **admin**) and password (default: **left blank**) for the camera and click **OK**. Click **OK** to exit the settings window.



NOTE


The camera may reboot after settings are changed. Wait about 30 seconds and then double-click the camera in Camera List or Auto Search to reconnect to the camera.

The app for iPhone® is called **Lorex Ping**.

For instructions on connecting to your camera using an iPhone®, see 6 *Connecting to Your Camera on iPhone®*, page 9.

13.1 Live Viewing with Lorex Ping for iPhone®


You can use Lorex Ping in portrait or landscape mode. Tilt the phone to switch between portrait or landscape.

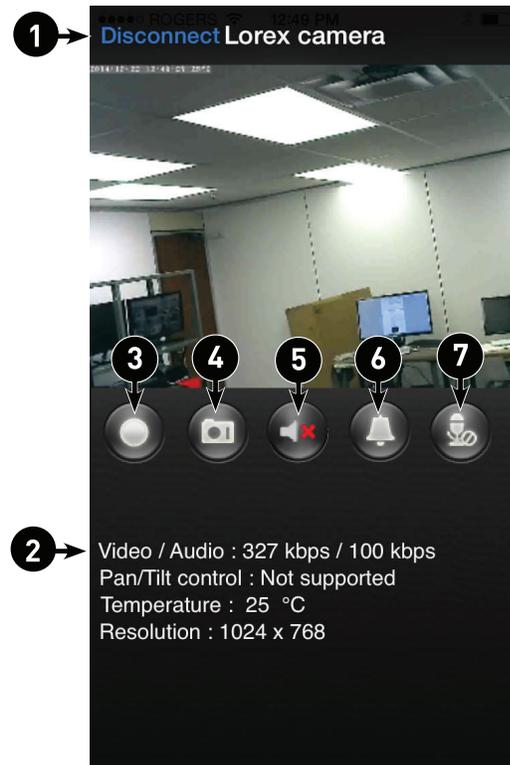

1. Disconnect button (only shown in portrait mode)
2. Video information
3. Record video to phone memory; press again to stop recording
4. Save snapshot of the camera to your phone
5. Turn on the audio stream from the camera's microphone
6. Play a siren on the camera (speaker required)
7. Activate 2-way-audio (Intercom) using the phone microphone (speaker required)

13.1.1 Using 2-Way-Audio (Intercom)

1. While viewing, touch  to activate 2-way-audio (intercom) using the phone microphone.
 - A volume slider appears that allows you to adjust the speaker volume.
 - Touch  again to turn off 2-way audio.

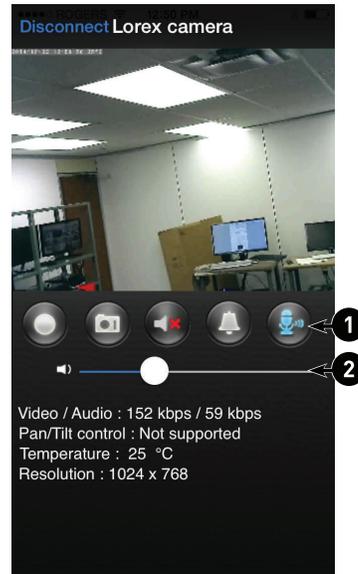

- 1.1. Turn off 2-way-audio
- 1.2. Adjust speaker volume

13.1.2 Taking Snapshots

- While viewing, tap  to take a snapshot from the camera. You can view snapshots using the Camera app or save photos to your computer by connecting your iPhone® to your computer using a USB cable.

13.1.3 Recording Video to iPhone®

You can manually record video from your camera directly to your iPhone's built in memory.

To record video to your iPhone's memory:

1. While viewing, tap  to start recording.
2. Tap  again to stop recording. To view the recorded video, see below.

13.2 Playing Back Video Recorded on iPhone®

After using the record button to record video to your iPhone®, you can playback video on iPhone®.

13.2.1 Using Playback


1. From the Camera List, tap Playback ().



NOTE

If you are still connected to the camera, tap **Disconnect** to return to the Camera List. Disconnect only appears when holding the phone in portrait mode.

2. Tap the name of the camera you would like to select.

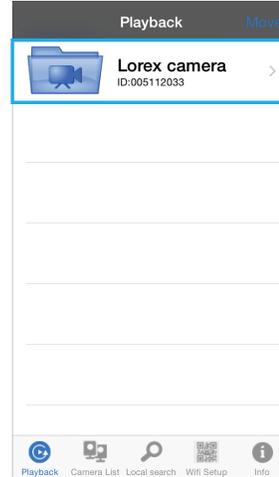


3. Tap the date of the video recording you would like to playback. Then tap the desired video file to start playback.
4. Use the on-screen video controls to control playback. Tap **Stop** to return to the file list.

13.3 Playing Back Video Recorded on microSD on iPhone®


You can playback video recorded on the camera microSD card (not included) on your iPhone®. For details on setting up microSD recording, see 13.5.14 *Configuring microSD Recording*, page 84.

To play back video recorded on the camera microSD card:

1. From the Camera List, tap  to open the camera settings page.
2. Scroll down and tap **SD card playback**.
3. Select the camera you would like to playback from.

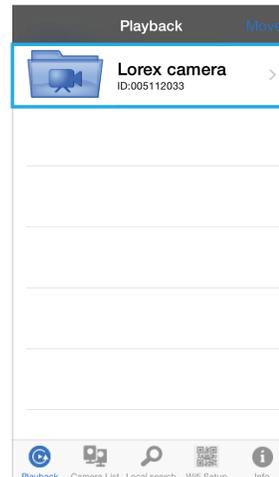

- The camera scans for recorded video files and shows a list of days with recorded video. Tap a day to view recordings created on that day.

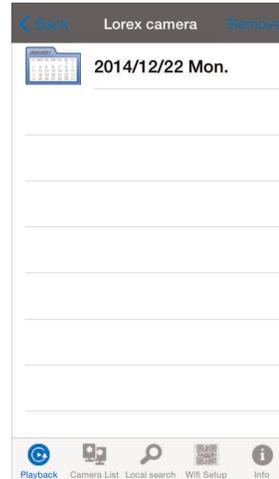


- Tap a recording to play it.
- Tap **Disconnect** to return to the recordings list.

13.3.1 Deleting Video Recordings on microSD


You can delete video recorded on the camera microSD card (not included) using your iPhone®. For details on setting up microSD recording, see 13.5.14 *Configuring microSD Recording*, page 84.

To delete video recordings:

- Tap Camera List . Then tap  for the camera with recordings you want to delete.
- Tap **SD card playback**. The camera scans the microSD card for recorded video files and shows a list of days with recorded video. Tap a day to view recordings created on that day.
- Tap **edit**.

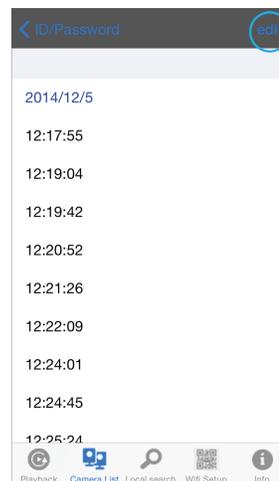

4. Tap  next to the video recording you would like to delete, then tap **Delete**. You will be prompted to confirm the deletion. Tap **OK**.

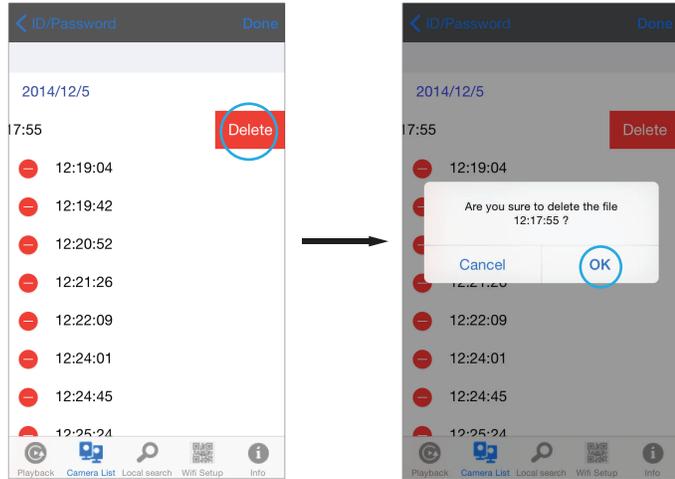


5. Tap **Done**.

13.4 Using Playback

1. From the Camera List, tap Playback ()

	NOTE
If you are still connected to the camera, tap Disconnect to return to the Camera List. Disconnect only appears when holding the phone in portrait mode.	



2. Tap the name of the camera you would like to select.

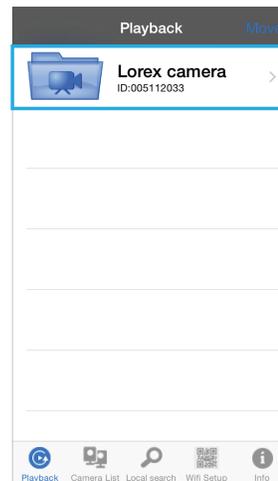

3. Tap the date of the video recording you would like to playback. Then tap the desired video file to start playback.
4. Use the on-screen video controls to control playback. Tap **Stop** to return to the file list.

13.5 Using Camera List to Edit Camera Settings

You can use the Camera List to adjust the connections settings or other settings for your camera.

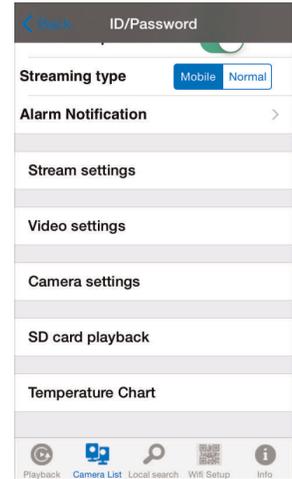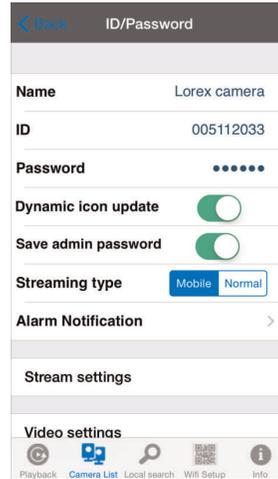

To access Camera Settings:


1. Tap Camera List . Then tap  next to the camera you would like to edit.
2. For certain menus, you will need to enter the camera admin user name and password before you may change settings. By default, the admin user name is **admin** and the password is **left blank**.

13.5.1 Editing Camera Connection Settings

You can edit your camera connection information. This is useful if you change the password of the camera or if you want to save the admin user name and password, so you don't have to enter it to make settings changes.

To edit camera connection settings:


1. In Camera List, tap  next to the camera you would like to edit.

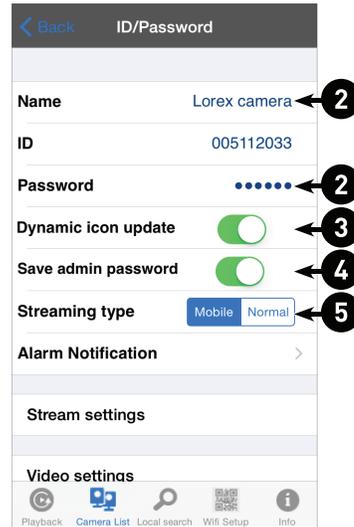


2. Change the **Name** and **Password** as needed.
3. Under **Dynamic icon update**, select **ON** to have the camera icon automatically update every time you connect to the camera, or select **OFF** to keep the icon as is.
4. Under **Save admin password**, select **ON** to have Lorex Ping save the admin user name and password the next time you enter it, or **OFF** to require the admin user name and password whenever settings changes are made.
5. Under **Streaming type**, select **Mobile** to configure the camera image quality settings for streaming to mobile devices (ie. smartphones and tablets), or **Normal** to set higher image quality settings.
6. Tap **Back** to save changes and return to camera list.

13.5.2 Deleting Cameras from Camera List

1. In Camera List, tap **Move**.

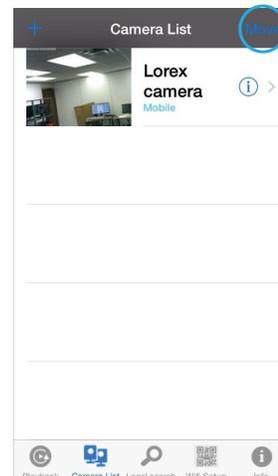


2. Tap  next to the camera you would like to delete then tap **Delete** to confirm.

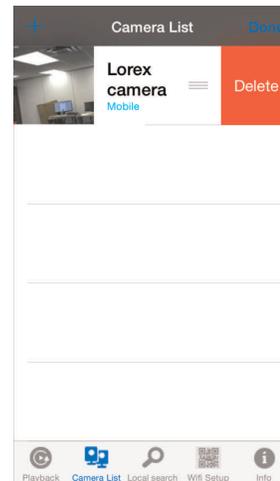

3. Tap **Done**.

13.5.3 Editing Motion/Sound Notification Settings (Push Notifications)


Push Notifications can send a notification straight to your iPhone® when motion or sound is detected by the camera. Push Alarm Notifications go directly to the notifications area on your device.

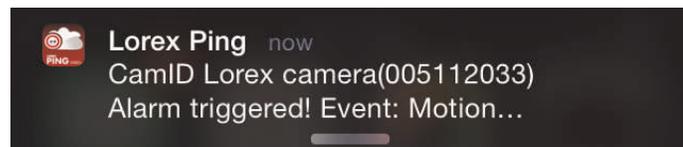

To configure motion / sound push notifications:

1. In Camera List, tap  next to the camera.

2. Tap **Alarm notification**.

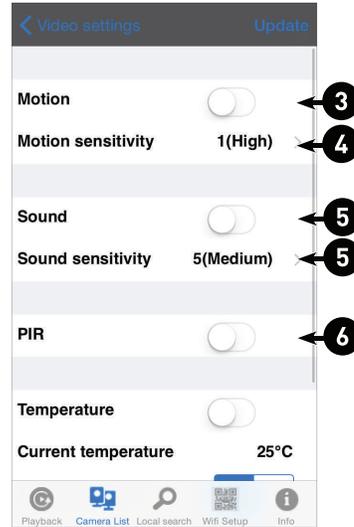

3. Under **Motion**, select **ON** to enable Push Alarm Notifications when motion is detected using video motion detection or **OFF** to disable.
4. Under **Motion sensitivity**, select the sensitivity for video motion detection push notifications between **1** (highest sensitivity) and **10** (lowest sensitivity) and press **OK**.
5. Under **Sound**, select **ON** to enable Push Alarm Notifications when sound is detected by the camera or **OFF** to disable. Under **Sound sensitivity**, select a sensitivity for Sound Push Alarm Notifications between **1** (lowest) and **10** (highest) and press **OK**.
6. Under **PIR**, select **ON** to enable Push Alarm Notifications when motion is detected using the PIR motion sensor or **OFF** to disable.
7. Tap **Update** to save your settings.

13.5.4 *Configuring Temperature Push Notifications and Temperature Units (Fahrenheit or Celsius)*


Temperature Push Notifications can be set up to send you alerts if the temperature near the camera goes higher or lower than the specified values. You can also select the temperature unit that will be used by the system.



To configure temperature push notifications:

1. In Camera List, tap  next to the camera.

2. Tap **Alarm notification**.

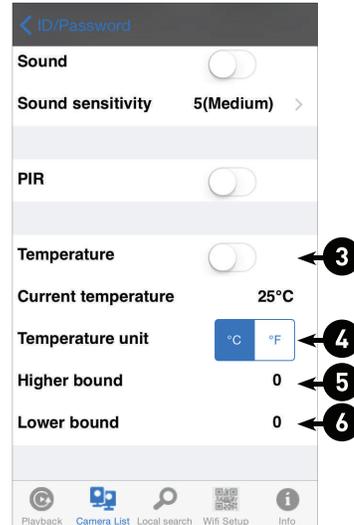

3. Under **Temperature**, select **ON** to enable temperature notifications.
4. Under **Temperature unit**, select **F°** or **C°**.
5. Under **Higher bound**, select the high temperature value. You will receive a notification if the temperature near the camera goes above this value.
6. Under **Lower bound**, select the low temperature value. You will receive a notification if the temperature near the camera goes above this value.
7. Tap **Update** to save your settings.

13.5.5 Viewing the Temperature Chart

The temperature line chart displays changes in the temperature near the camera.



NOTE


The camera requires a temperature sensor in order to use this feature. LNC226X does not have a temperature sensor.

1. In Camera List, tap next to the camera.

2. Tap **Temperature Chart**. The temperature chart displays temperatures for the past 30 days.



3. Tap **30 Day** to switch the time period to the past 24 hours. Tap again to switch to the past 30 days.

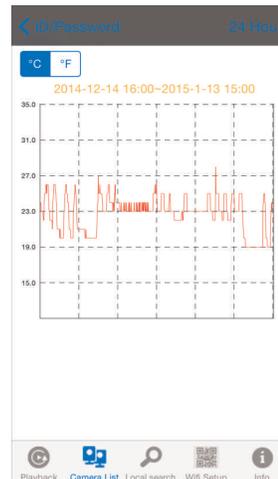

4. Tap **°C** or **°F** to switch the temperature unit.

13.5.6 Editing Camera Mobile Streaming Settings

Configure the camera image quality settings for streaming to mobile devices (i.e. smartphones and tablets). Please note that less bandwidth is generally available over mobile networks than over WiFi or Ethernet.

To edit mobile streaming settings:

1. In Camera List, tap  next to the camera.


2. Tap **Stream Settings**.



3. Under **Bandwidth**, select the bandwidth for your mobile connection. If you are mainly connecting using WiFi, you may set this setting higher.
4. Under **Auto**, select **ON** to have the camera automatically select the resolution and frame rate based on available bandwidth. If you set the resolution and frame rate to automatic, go straight to step 7. Or, select **OFF** to manually select the resolution (step 5) and frame rate (step 6).
5. Under **Resolution**, select the resolution that will be used when connecting to the camera using a smart phone or tablet: **320x240**, **480x360**, **640x400**, **1024x768**, or **1280x800**.
6. Under **Frame rate**, select the frame rate that will be used when connecting to the camera using a smart phone or tablet between **30fps** (highest) and **1fps** (lowest).
7. Under **Microphone**, select **OFF** to turn off audio streaming to your mobile device or tap to select **ON** to turn on audio streaming to your mobile device.
8. Tap **Update** to save your settings.

13.5.7 Editing Camera Video Settings

1. In Camera List, tap  next to the camera.
2. Tap **Video Settings**.

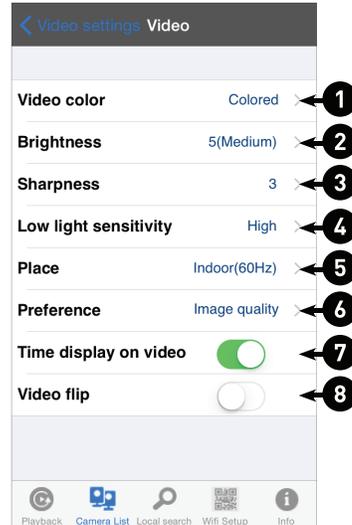3. Tap **Video**.

4. Configure the following:

- 4.1. **Video color:** Select **Colored** to view the camera in color or select **Black & white**. Tap **Video** to return to Video settings.
 - 4.2. **Brightness:** Manually adjust the brightness of the image between **10** (highest) and **1** (lowest). Tap **Video** to return to Video settings.
 - 4.3. **Sharpness:** Manually adjust the sharpness of the image between **10** (highest) and **1** (lowest). Tap **Video** to return to Video settings.
 - 4.4. **Low light sensitivity:** Set the camera's sensitivity in low light environments between **Very High** (highest), **High**, and **Normal** (lowest). Tap **Video** to return to Video settings.
 - 4.5. **Place:** Select **Outdoor** for well lit environments. Select **Indoor** if you notice strip lines in the image or if the picture is too dark on the Outdoor video setting. Select **Indoor + Sunlight** if the picture is too bright on the Indoor Video setting. If you select an indoor setting, select **60Hz** or **50Hz** to adjust the camera for the frequency of your indoor lighting. Tap **Video** to return to Video settings.
 - 4.6. **Preference:** Select whether you would like the camera to reduce the image quality or the frame rate when bandwidth increases or decreases. Select **Video Motion** to have the camera maintain the frame rate and reduce image quality when bandwidth is insufficient. Select **Image Quality** to have the camera maintain image quality and reduce frame rate when bandwidth is insufficient. Select **Better Quality** to have the camera maintain frame rate and increase quality when bandwidth is sufficient. Select **Best Quality** to have the camera maintain the frame rate and increase quality to the maximum speed of the connection. Tap **Video** to return to Video settings.
 - 4.7. **Time display on video:** Select **ON** to enable time stamps on video or **OFF** to disable time stamps.
 - 4.8. **Video flip:** Select **ON** to flip the camera image vertically and horizontally or select **OFF** for the normal orientation. This is useful if the camera has been mounted to a wall or ceiling upside down.
5. Tap **Video Settings** when finished making changes, then tap **Update** to save your settings.

13.5.8 Configuring LED Control and Motion Detection Sensitivity

Configure the behavior of the camera status LED's. This is useful if you want the camera to be harder to spot at night. You can also configure the sensitivity for video motion detection.

To configure LED's and motion detection sensitivity:

1. In Camera List, tap  next to the camera.
2. Tap **Video Settings**. Then tap **Control**.



3. Under **Status LED**, select one of the following:
 - **Normal:** LED's will function as normal. For details on LED functions, see 3 *Camera Overview*, page 3 or .
 - **Always turn off:** LED's are turned off at all times.
 - **Turn off after network connected:** LED's turn on when the camera is powered on and turn off once a network connection is made.
4. Tap **Control** to return to the Control menu.
5. Under **Motion Sensitivity**, select the motion detection sensitivity between **1** (High) and **10** (Low). If Motion Detection Sensitivity is set to 1, motion detection will be triggered if a moving object is larger than 1% of the video area. If it is set to 10, a moving object must be larger than 10% of the video area to trigger motion detection. Tap **Control** to return to the Control menu.



NOTE

This setting does not affect the PIR motion detector.


6. Tap **Video Settings** when finished making changes, then tap **Update** to save your settings.

13.5.9 Configuring Night Mode Settings

Configure when the camera uses day or night mode. When day mode is on, the camera sees in color. When night mode is on, the camera sees in black and white, and the Infrared LED turns on to enable night vision.


To configure Day/Night mode:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Video Settings**. Then tap **Night mode control**.

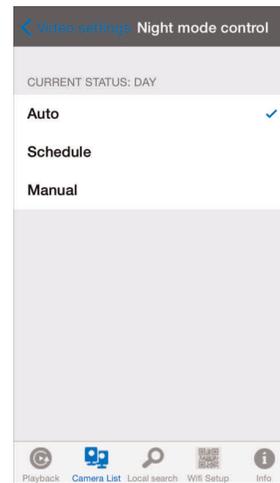


3. Select one of the following:

- **Auto:** Camera will automatically switch between day mode or night mode, based on the amount of light in the room.
- **Schedule:** Camera will switch between day mode and night mode at a scheduled times each day. If using this option, tap under **Schedule time of night mode**, use the sliders to set the **Start** time (when night mode begins each day) and **End** time (when night mode ends each day), then tap **OK**.

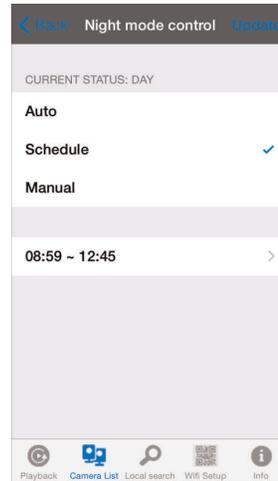

- **Manual:** Manually select day mode or night mode. If using this option, select **Day** for day mode or **Night** for night mode.

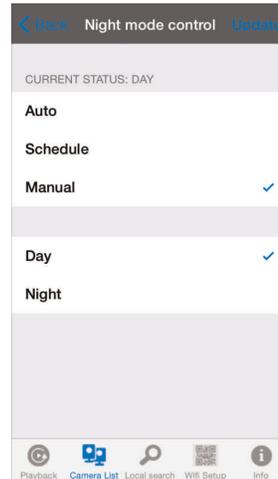

4. Tap **Update** to save your changes.


13.5.10 Editing Camera Wired Network Settings

Configure the camera IP address when connected using Ethernet. Select DHCP or Fixed IP.

To edit camera wired network settings:

1. In Camera List, tap  next to the camera you would like to edit.

2. Tap **Camera Settings**.
3. Tap **Network** then **Wired Network**.

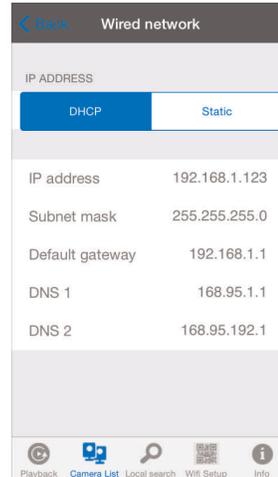


4. Select **DHCP** (recommended) to allow the camera to automatically obtain an IP address from the router or **Static** to use fixed IP address settings. If you select Static, configure your **IP Address**, **Subnet mask**, **Default gateway**, **DNS1**, and **DNS2**.
5. Tap **Update** to save your settings.

13.5.11 Editing Camera WiFi Network Settings

Configure WiFi network settings for the camera.

To edit camera WiFi settings:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Camera Settings**.
3. Tap **Network** then **WiFi Network**.
4. Slide WiFi to **ON** to enable WiFi on the camera and scan for available networks.
5. Tap a WiFi network and enter the password to connect.
 - To connect to a hidden WiFi network, tap **Other**. Enter the SSID and select the security type and tap **Add**. Tap the network name from the list and enter the password.

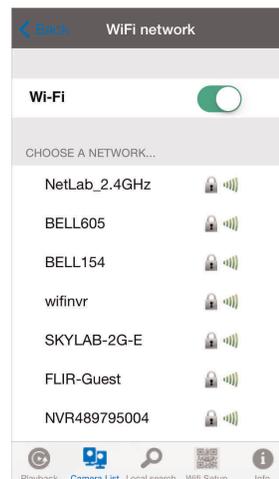


6. Wait for the update to complete.
7. Remove the Ethernet cable from the camera. It will connect to the WiFi network. When it is connected, the blue Network LED will be on or flashing.
8. Press **Camera Settings** then **Camera List** to exit the edit camera screen.
9. Tap the camera in the Camera List to connect. If you cannot connect, check to make sure you have entered the correct wireless password and that the camera is in signal range of your wireless router.

13.5.12 Enabling Email Notifications

Configure email alarms. The camera can be set up to send email alerts when motion is detected. Email alarms include a .jpg attachment.

To enable email notifications:

1. In Camera List, tap  next to the camera.
2. Tap **Camera Settings**.
3. Tap **Schedule** then **Email Alarm**.

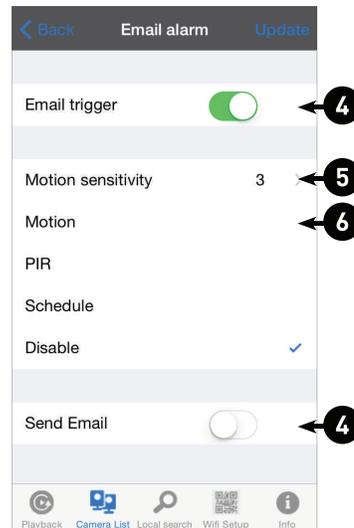

4. Under **Email trigger**, select **ON** to enable email notifications or **OFF** to disable. Then under **Send Email**, select **ON** to enable email notifications.
5. Under **Motion sensitivity**, select the motion detection sensitivity between **1** (High) and **10** (Low). If Motion Detection Sensitivity is set to 1, motion detection will be triggered if a moving object is larger than 1% of the video area. If it is set to 10, a moving object must be larger than 10% of the video area to trigger motion detection. Tap **Email alarm** to return to the Email Alarm menu.



NOTE

This setting does not affect the PIR motion detector.

6. Check the following trigger options for email alarms:

- **Motion:** Use Video motion detection to trigger email alarms. Video motion detection looks for movement in the image to determine if there is motion. This means that there may be false alarms caused by changes in lighting, trees moving in the wind, etc.
- **PIR:** Use the PIR motion detector to trigger email alarms. The PIR motion detector uses changes in temperatures (e.g. from a person moving around in front of the camera) to determine if there is motion. PIR motion detection is less effective at higher temperatures.




NOTE

- You may also select both PIR and Motion to receive alarms from both motion triggers.

- **Schedule:** Send email alarms based on the settings configured in the Scheduling menu.
- **Disable:** Disable email alarms.

7. Enter up to 3 email addresses under **Recipient 1~3** that will receive email alarms.

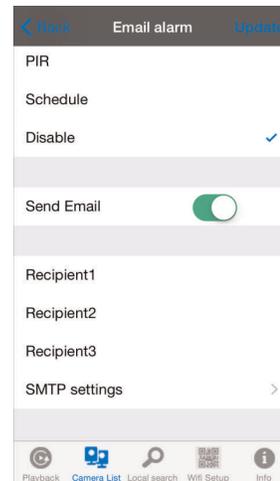

8. Tap **Update** to save your changes.



NOTE

If you want to use a custom SMTP server to send Email messages, click **SMTP Settings**, enter your SMTP server information, and tap **OK**.


13.5.13 Enabling Speaker Alarms

Configure the siren. The siren can be set up to go off when the camera detects motion. This is helpful if you want to scare off intruders.

To configure speaker alarms:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Camera Settings**.

3. Tap **Schedule** then **Speaker Alarm**.

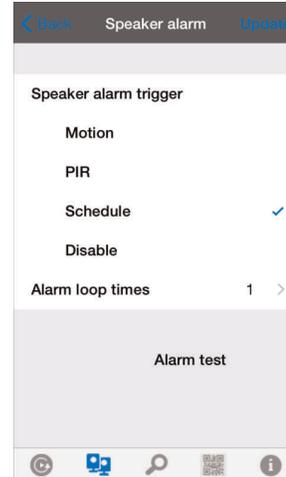

4. Under **Speaker Alarm Trigger**, check the triggers that will cause speaker alarms:
 - **Motion:** Use Video motion detection to trigger audio alarms. Video motion detection looks for movement in the image to determine if there is motion. This means that there may be false alarms caused by changes in lighting, trees moving in the wind, etc.
 - **PIR:** Use the PIR motion detector to trigger speaker alarms. The PIR motion detector uses changes in temperatures (e.g. from a person moving around in front of the camera) to determine if there is motion. PIR motion detection is less effective at higher temperatures.



NOTE

- You may also select both PIR and Motion to receive alarms from both motion triggers.

- **Schedule:** Create speaker alarms based on the settings set in the Scheduling menu.
 - **Disable:** Disable speaker alarms.
5. Under **Alarm Loop Times**, select the number of times you would like the speaker alarm to repeat when alarms occur.
 6. Tap **Alarm Test** to sound a test alarm.
 7. Tap **Update** to save your settings.


13.5.14 Configuring microSD Recording

Configure video recording to the microSD card (required; not included). To playback recordings saved on the microSD card, use L-View or the iPhone®, iPad®, or Android™ apps.

To configure microSD card recording:

1. Make sure a microSD card (not included) is inserted into the camera. It is recommended to format the microSD card before using it with the camera.
2. In Camera List, tap  next to the camera you would like to edit.
3. Tap **Camera Settings**.

4. Tap **Schedule** then **SD-Card**.

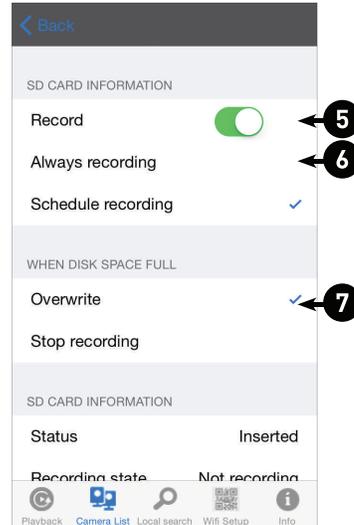

5. Under **Record**, select **ON** to enable microSD recording or **OFF** to disable.
6. Check one of the following recording options:
 - **Always Recording:** Camera will record continuously at all times.
 - **Schedule Recording:** Camera will record according to settings set in the recording schedule.

**NOTE**

To enable Motion detection recording using iPhone®, you must use Schedule recording. Then, create a schedule in the Scheduling menu with Motion trigger, PIR trigger, or both Motion trigger and PIR trigger selected.

7. Under **When disk space full**, check **Overwrite** to set the camera to overwrite the oldest recordings when the microSD card is full or select **Stop recording** to set the camera to stop recording when the microSD card is full.
8. Tap **Update** to save your settings.


13.5.15 Configuring the Camera Recording and Alarm Schedule

Configure schedules for recording and alarms. Schedules can be configured separately for alarms and recording. You can configure up to 12 schedules.


To create a schedule for alarms or recording:

1. First, you must enable alarms or recording to use the schedule.
2. In Camera List, tap  next to the camera you would like to edit.
3. Tap **Camera Settings**.
4. Tap **Schedule** then **Scheduling**.

5. Tap **Add Schedule**.

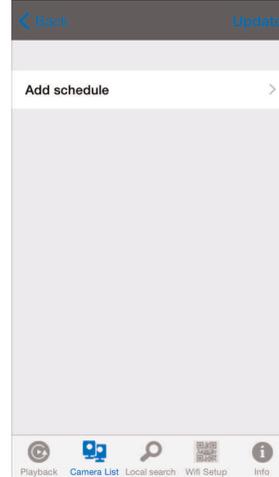


6. Under **Email Alarm**, check **Motion trigger** to send an email alarm based on video motion, select **PIR trigger** to use the PIR motion sensor, or select both **Motion trigger** and **PIR trigger**.

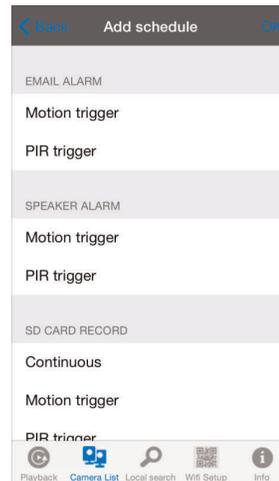


7. Under **Speaker Alarm**, check **Motion trigger** to create a speaker alarm based on video motion, check **PIR trigger** to use the PIR motion sensor, or select both **Motion trigger** and **PIR trigger**.

8. Under **SD card record**, check **Continuous** for the camera to record to microSD continuously during the scheduled time. Check **Motion trigger** to record when video motion is trigger during the scheduled time, select **PIR trigger** to record when the PIR motion sensor is triggered during the scheduled time, or select both.

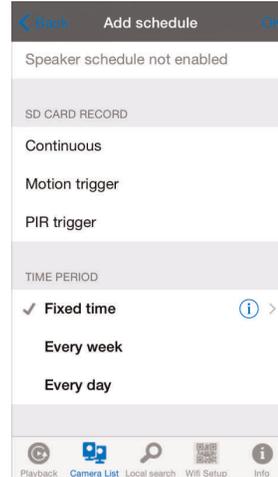

9. Under **Time period**, select one of the following:


- **Every week:** Create a weekly recording schedule. Tap  and check the days you would like the schedule to apply to. Tap **Start** and **End** and use the sliders to configure the start and end time for the schedule. Tap **OK**.
- **Every day:** Create a daily recording schedule. Tap  then tap **Start** and **End** and use the sliders to configure the start and end time for the schedule. Tap **OK**.
- **Fixed time:** Create a one time schedule (for example, if you are going on vacation, and would like to record all the time). Tap  then tap **Start** and **End** and use the sliders to configure the exact date and time when you would like the schedule to start and end. Tap **OK**.

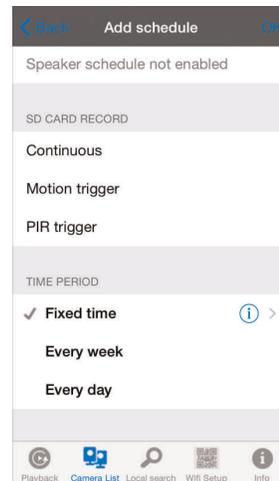

10. Tap **OK** to save the schedule. Tap **Update** to save your settings.

To delete a Schedule:

1. From the Scheduling menu, swipe the schedule you would like to delete from left to right.

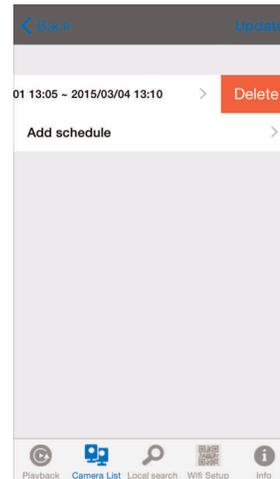

2. Tap **Delete**.
3. Tap **Update** to save your changes.

13.5.16 Configuring the Camera Date and Time

Configure the camera date and time. The camera syncs with an Internet NTP time server to automatically provide the correct time, once you have configured your time zone and daylight savings time settings.


To set the camera date and time:

1. In Camera List, tap ⓘ next to the camera you would like to edit.
2. Tap **Camera Settings**.
3. Tap **Admin** then **Date/Time**.



4. Tap **Time Zone**.

- Use the slider to select your time zone.

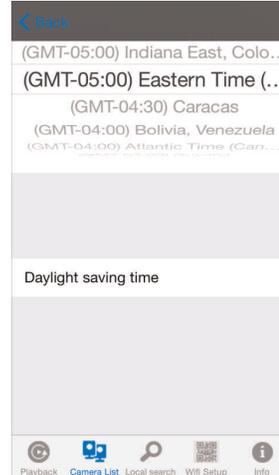

- If your region observes Daylight Savings Time, check **Daylight Savings Time**. Tap **Start Time** and **End Time**, use the sliders to configure the start and end time for Daylight Savings Time and then tap **OK**. Tap **Back** to return.
- Tap **Update** to save your changes. Tap **OK**. The camera will reboot to apply the new time zone.

13.5.17 Rebooting the Camera

- In Camera List, tap  next to the camera you would like to edit.
- Tap **Camera Settings**.
- Tap **Admin** then **Reboot**.
- Tap **OK** to confirm.

13.6 Using Local Search to Add Cameras

You can use the Local Search Menu to automatically add the ID's for cameras on your local network.

To add cameras using local search:

- Tap the Local Search button ()

2. Lorex Ping automatically scans for cameras on your local network. Tap **Search** to re-scan.



3. Tap a camera from the list. The Add camera screen comes on with the camera ID already entered.
4. Enter a **Name** of your choice and enter the camera **Password**. If you have not connected to your camera before, the password is **lorex**.
5. Tap **Done**. The camera is now added to camera list. Tap the camera name in Camera List to connect to the camera.

The app for iPad® is called **Lorex Ping HD**.

For instructions on connecting to your camera using iPad®, see *7 Connecting to Your Camera on iPad®*, page 14.

14.1 Live Viewing with Lorex Ping HD



1. Disconnect from / connect to camera
2. Information
3. Record to iPad®
4. Snapshot
5. Activate 2-way-audio (speaker required)
6. Perform action to all cameras
7. View selected camera in single-channel view
8. 4-camera view
9. 6-camera view
10. Full-screen
11. Mute audio
12. Adjust volume

14.1.1 Using 2-Way Audio (Intercom)

1. While viewing, touch  to activate 2-way-audio (intercom) using the phone microphone.
2. Tap  again to deactivate 2-way-audio.

14.1.2 Taking Snapshots

- While viewing, tap  to take a snapshot from the camera. You can view snapshots using the Camera app or save photos to your computer by connecting your iPad® to your computer using a USB cable.



NOTE

There is no Camera app on 1st generation iPads. To view your snapshots, you must connect the iPad to your computer using a USB cable.

14.1.3 Recording Video to iPad

You can manually record video from your camera directly to your iPad's built in memory.

To record video to your iPad's memory:

1. While viewing, tap  to start recording.
2. Tap  again to stop recording. To view the recorded video, see below.

14.2 Playing Back Video Recorded to iPad®

After using the record button to record video to your iPad®, you can playback video on iPad®.

To playback video recorded to iPad®:

1. Tap the Playback button () then tap iPad.



2. Select the camera you would like to playback video from. A list of days with recorded video appears.
3. Tap a day to see recordings from that day.
4. Tap a recording to start playback.
5. During playback, tap in the display area to bring up playback controls.

14.3 Playing Back Video Recorded to microSD on iPad®

You can playback video recorded on the camera microSD card (not included) on your iPad®. For details on setting up microSD recording, see 14.4.13 *Configuring microSD Recording*, page 105.

To play back video recorded on the camera microSD card:

1. Tap the Playback button  then tap **SD Card**.
2. Select the camera you would like to playback from.
3. The camera scans for recorded video files and shows a list of days with recorded video. Tap a day to view recordings created on that day.
4. Tap a recording to play it.



5. Tap the Camera List button  to exit playback.

14.4 Using Camera List to Edit Camera Settings

You can use the Camera List to adjust the connections settings or other settings for your camera.

To access Camera Settings:

1. Tap Camera List . Then tap  next to the camera you would like to edit.

- For certain menus, you will need to enter the camera admin user name and password before you may change settings. By default, the admin user name is **admin** and the password is **left blank**.



14.4.1 Editing Camera Connection Settings

You can edit your camera connection information. This is useful if you change the password of the camera or if you want to save the admin user name and password, so you don't have to enter it to make settings changes.

To edit camera connection settings:


1. In Camera List, tap  next to the camera you would like to edit.



2. Change the **Name** and **Password** as needed.
3. Under **Dynamic icon update**, select **ON** to have the camera icon automatically update every time you connect to the camera, or select **OFF** to keep the icon as is.
4. Under **Save admin password**, select **ON** to have Lorex Ping save the admin user name and password the next time you enter it, or **OFF** to require the admin user name and password whenever settings changes are made.
5. Tap **Done** to save changes.

14.4.2 Deleting Cameras from Camera List


1. In Camera List, tap **Move**.

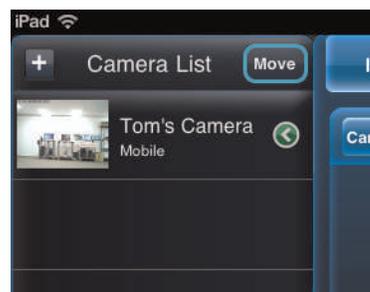

2. Tap  next to the camera you would like to delete then tap **Delete** to confirm.
3. Tap **Done**.

14.4.3 Editing Motion/ Sound Notification Settings (Push Notifications)

Push Alarm Notifications can be set up to create a notification straight to your iPad® when motion or sound is detected by the camera. Push Alarm Notifications go directly to the notifications area on your device.

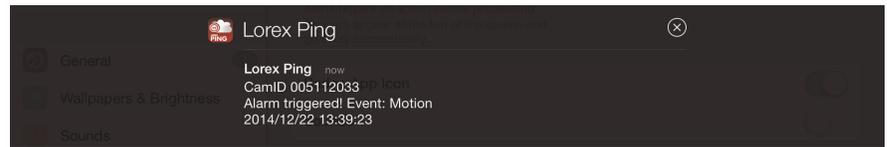

To enable Push Alarm Notifications:


1. In Camera List, tap  next to the camera.



2. For certain menus, you will need to enter the camera admin user name and password before you may change settings. By default, the admin user name is **admin** and the password is **left blank**.
3. Tap **Alarm notification**.
4. Under **Motion**, select **ON** to enable Push Alarm Notifications when motion is detected using video motion detection or **OFF** to disable.
5. Under **Sound**, select **ON** to enable Push Alarm Notifications when sound is detected by the camera or **OFF** to disable. Under **Sound Sensitivity**, select a sensitivity for Sound Push Alarm Notifications between **1** (lowest) and **10** (highest).
6. Under **PIR**, select **ON** to enable Push Alarm Notifications when motion is detected using the PIR motion sensor or **OFF** to disable.
7. Tap **Update** to save your settings.

14.4.4 Configuring Temperature Push Notifications and temperature Units (Fahrenheit or Celsius)

Temperature Push Notifications can be set up to send you alerts if the temperature near the camera goes higher or lower than the specified values. You can also select the temperature unit that will be used by the system.

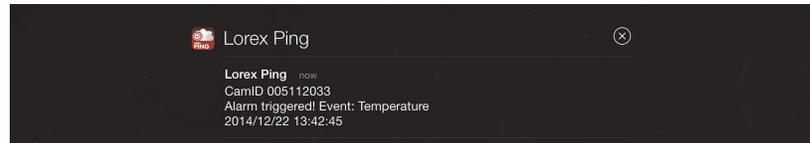

To configure temperature push notifications:

1. In Camera List, tap  next to the camera.



2. Tap **Alarm notification**.
3. Under **Temperature**, select **ON** to enable temperature notifications.
4. Under **Temperature unit**, select **F°** or **C°**.
5. Under **Higher bound**, select the high temperature value. You will receive a notification if the temperature near the camera goes above this value.
6. Under **Lower bound**, select the low temperature value. You will receive a notification if the temperature near the camera goes above this value.
7. Tap **Update** to save your settings.

14.4.5 Editing Camera Mobile Streaming Settings

Configure the camera image quality settings for streaming to mobile devices (i.e. smartphones and tablets). Please note that less bandwidth is generally available over mobile networks than over WiFi or Ethernet.

To edit mobile streaming settings:


1. In Camera List, tap  next to the camera.
2. Tap **Stream Settings**.



3. Under **Bandwidth**, select the bandwidth for your mobile connection. If you are mainly connecting using WiFi, you may set this setting higher.
4. Under **Auto**, select **ON** to have the camera automatically select the resolution and frame rate based on available bandwidth. If you choose to select resolution and frame rate automatically, go straight to step 7. Or, select **OFF** to manually select the resolution (step 5) and frame rate (step 6).
5. Under **Resolution**, select the resolution that will be used when connecting to the camera using a smart phone or tablet: **320x240**, **480x360**, **640x400**, or **1024x768**. Tap **Done** to confirm.
6. Under **Frame rate**, select the frame rate that will be used when connecting to the camera using a smart phone or tablet between **30fps** (highest) and **1fps** (lowest). Tap **Done** to confirm.
7. Under **Microphone**, select **OFF** to turn off audio streaming to your mobile device or tap to select **ON** to turn on audio streaming to your mobile device.
8. Tap **Update** to save your settings.

14.4.6 Editing Camera Video Settings

1. In Camera List, tap  next to the camera.
2. Tap **Video Settings**.

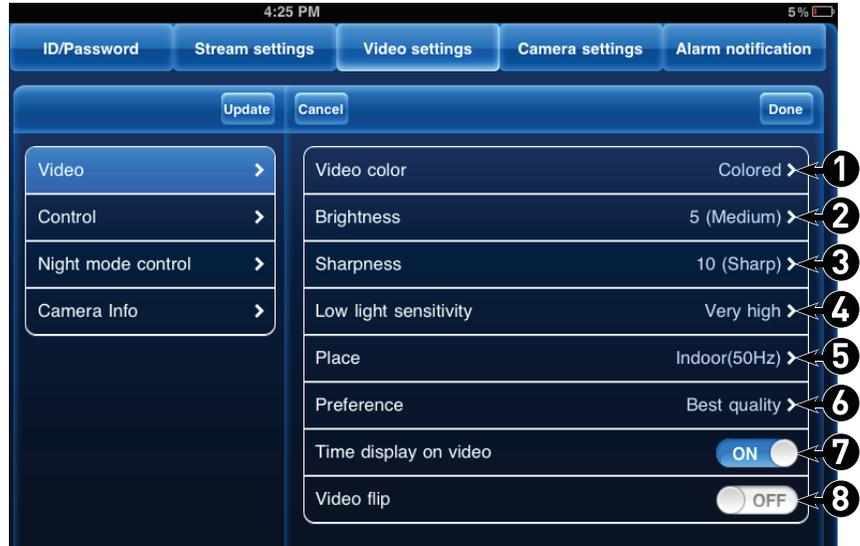3. Tap **Video**.

4. Configure the following:

- 4.1. **Video color:** Select **Colored** to view the camera in color or select **Black & white**. Tap **Done** to return to Video settings.
- 4.2. **Brightness:** Manually adjust the brightness of the image between **10** (highest) and **1** (lowest). Tap **Done** to return to Video settings.
- 4.3. **Sharpness:** Manually adjust the sharpness of the image between **10** (highest) and **1** (lowest). Tap **Done** to return to Video settings.
- 4.4. **Low Light Sensitivity:** Set the camera's sensitivity in low light environments between **Very High** (highest), **High**, and **Normal** (lowest). Tap **Done** to return to Video settings.
- 4.5. **Place:** Select **Outdoor** for well lit environments. Select **Indoor** if you notice strip lines in the image or if the picture is too dark on the Outdoor video setting. Select **Indoor + Sunlight** if the picture is too bright on the Indoor setting. If you select an indoor setting, select **60Hz** or **50Hz** to adjust the camera for the frequency of your indoor lighting. Tap **Done** to return to Video settings.
- 4.6. **Preference:** Select whether you would like the camera to reduce the image quality or the frame rate when bandwidth increases or decreases. Select **Video Motion** to have the camera maintain the frame rate and reduce image quality when bandwidth is insufficient. Select **Image Quality** to have the camera maintain image quality and reduce frame rate when bandwidth is insufficient. Select **Better Quality** to have the camera maintain frame rate and increase quality when bandwidth is sufficient. Select **Best Quality** to have the camera maintain the frame rate and increase quality to the maximum speed of the connection. Tap **Done** to return to Video settings.
- 4.7. **Time Display on Video:** Select **ON** to enable time stamps on video or **OFF** to disable time stamps.
- 4.8. **Video flip:** Select **ON** to flip the camera image vertically and horizontally or select **OFF** for the normal orientation. This is useful if the camera has been mounted to a wall or ceiling upside down.

5. Tap **Update** to save your settings.

 **NOTE**


For certain menus, you will need to enter the camera admin user name and password before you may change settings. By default, the admin user name is **admin** and the password is **left blank**.

14.4.7 Configuring LED Control and Motion Detection Sensitivity

Configure the behavior of the camera status LED's. This is useful if you want the camera to be harder to spot at night. You can also configure the sensitivity for video motion detection.

To configure LED's and motion detection sensitivity:

1. In Camera List, tap  next to the camera.
2. Tap **Video Settings**. Then tap **Control**.

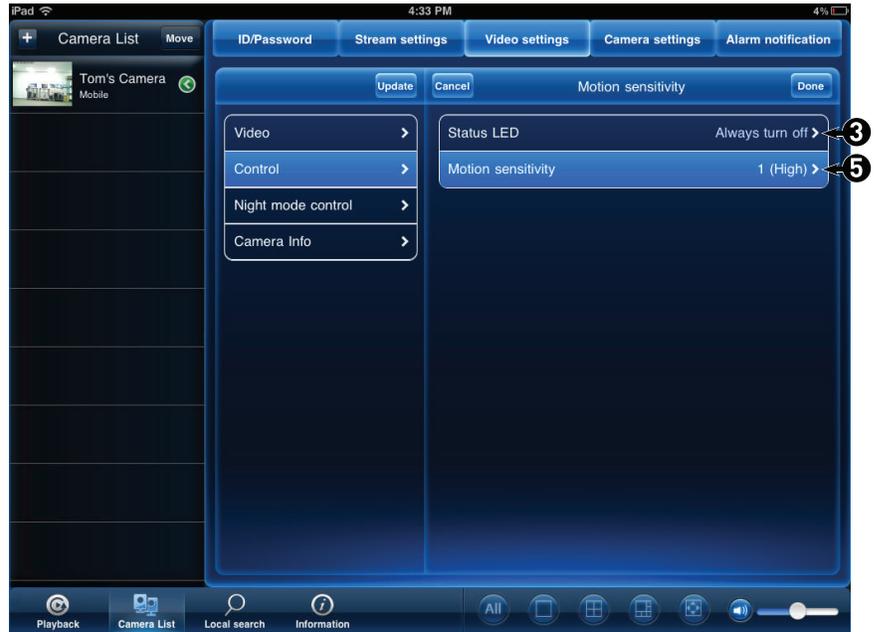

3. Under **Status LED**, select one of the following:
 - **Normal:** LED's will function as normal. For details on LED functions, see 3 *Camera Overview*, page 3 or .
 - **Always turn off:** LED's are turned off at all times.
 - **Turn off after network connected:** LED's turn on when the camera is powered on and turn off once a network connection is made.
4. Tap **Done** to return to the Control menu.
5. Under **Motion Sensitivity**, select the motion detection sensitivity between **1** (High) and **10** (Low). If Motion Detection Sensitivity is set to 1, motion detection will be triggered if a moving object is larger than 1% of the video area. If it is set to 10, a moving object must be larger than 10% of the video area to trigger motion detection. Tap **Control** to return to the Control menu.

 **NOTE**

This setting does not affect the PIR motion detector.


6. Tap **Update** to save your settings.

14.4.8 Configuring Night Mode Settings

Configure when the camera uses day or night mode. When day mode is on, the camera sees in color. When night mode is on, the camera sees in black and white, and the Infrared LED turns on to enable night vision.


To configure Day/Night mode:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Video Settings**. Then tap **Night Mode Control**.

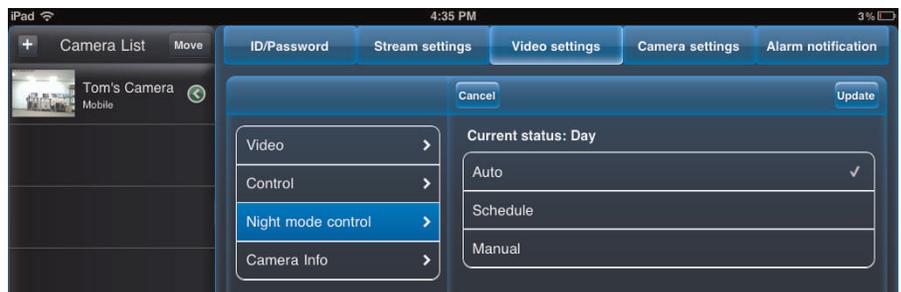

3. Select one of the following:

- **Auto:** Camera will automatically switch between day mode or night mode, based on the amount of light in the room.
- **Schedule:** Camera will switch between day mode and night mode at scheduled times each day. If using this option, tap under **Schedule time of night mode**, use the sliders to set the **Start time** (when night mode begins each day) and **End time** (when night mode ends each day), then tap **Done**.

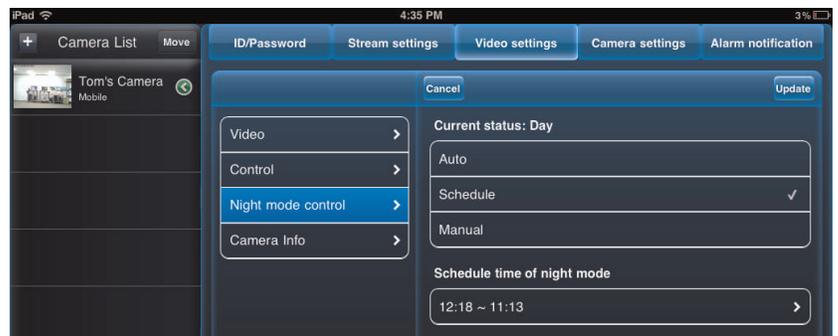

- **Manual:** Manually select day mode or night mode. If using this option, select **Day** for day mode or **Night** for night mode.

4. Tap **Update** to save your changes.

14.4.9 Editing Camera Wired Network Settings

Configure the camera IP address when connected using Ethernet. Select DHCP or Fixed IP.

To edit camera wired network settings:

1. In Camera List, tap  next to the camera you would like to edit.

2. Tap **Camera Settings**.
3. Tap **Network** then **Wired Network**.



4. Select **DHCP** (recommended) to allow the camera to automatically obtain an IP address from the router or **Static** to use fixed IP address settings. If you select Static, configure your **IP Address**, **Subnet mask**, **Default gateway**, **DNS1**, and **DNS2**.
5. Tap **Update** to save your settings.

14.4.10 Editing Camera WiFi Network Settings

Configure WiFi network settings for the camera.

To edit camera WiFi settings:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Camera Settings**.
3. Tap **Network** then **WiFi Network**.



4. Slide **WiFi** to **ON** to enable WiFi on the camera and scan for available networks.

5. Tap a WiFi network and enter the password to connect.
 - To connect to a hidden WiFi network, tap **Other**. Enter the SSID and select the security type and tap **Done**. Tap the network name from the list and enter the password.
6. Wait for the update to complete.
7. Remove the Ethernet cable from the camera. It will connect to the WiFi network. When it is connected, the blue Network LED will be on or flashing.
8. Tap  next to the camera to exit the edit camera screen.
9. Tap the camera in the Camera List to connect. If you cannot connect, check to make sure you have entered the correct wireless password and that the camera is in signal range of your wireless router.

14.4.11 Enabling Email Notifications

Configure email alarms. The camera can be set up to send email alerts when motion is detected. Email alarms include a .jpg attachment.

To enable email notifications:

1. In Camera List, tap  next to the camera.
2. Tap **Camera Settings**.



3. Tap **Schedule** then **Email Alarm**.
4. Under **Email trigger**, select **ON** to enable email notifications or **OFF** to disable.

5. Under **Motion sensitivity**, select the motion detection sensitivity between **1** (High) and **10** (Low). If Motion Detection Sensitivity is set to 1, motion detection will be triggered if a moving object is larger than 1% of the video area. If it is set to 10, a moving object must be larger than 10% of the video area to trigger motion detection. Tap **Email alarm** to return to the Email Alarm menu.

 NOTE
This setting does not affect the PIR motion detector.

6. Check the following trigger options for email alarms:
 - **Motion:** Use Video motion detection to trigger email alarms. Video motion detection looks for movement in the image to determine if there is motion. This means that there may be false alarms caused by changes in lighting, trees moving in the wind, etc.
 - **PIR:** Use the PIR motion detector to trigger email alarms. The PIR motion detector uses changes in temperatures (e.g. from a person moving around in front of the camera) to determine if there is motion. PIR motion detection is less effective at higher temperatures.

 NOTE
<ul style="list-style-type: none"> • You may also select both PIR and Motion to receive alarms from both motion triggers.

- **Schedule:** Send email alarms based on the settings configured in the Scheduling menu.
7. Under **Send Email**, select **ON** to enable email notifications.
 8. Enter up to 3 email addresses under **Recipient1~3** that will receive email alarms.
 9. Tap **Update** to save your changes.

 NOTE
If you want to use a custom SMTP server to send Email messages, click SMTP Settings , enter your SMTP server information, and tap OK .


14.4.12 Enabling Speaker Alarms

Configure the siren. The siren can be set up to go off when the camera detects motion. This is helpful if you want to scare off intruders.

To configure speaker alarms:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Camera Settings**.

3. Tap **Schedule** then **Speaker Alarm**.

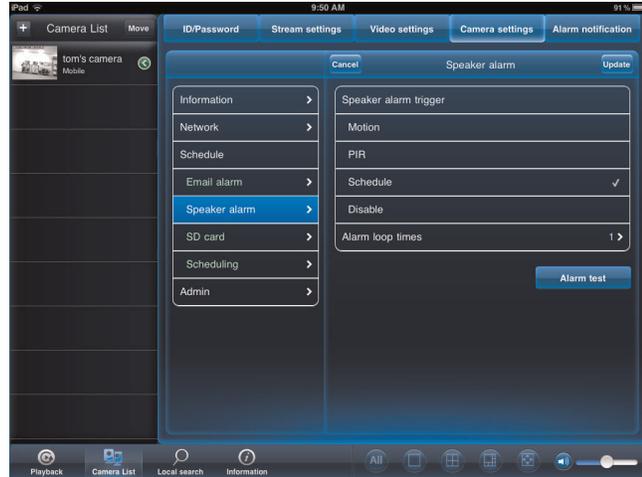

4. Under **Speaker Alarm Trigger**, check the triggers that will cause speaker alarms:
- **Motion:** Use Video motion detection to trigger audio alarms. Video motion detection looks for movement in the image to determine if there is motion. This means that there may be false alarms caused by changes in lighting, trees moving in the wind, etc.
 - **PIR:** Use the PIR motion detector to trigger audio alarms. The PIR motion detector uses changes in temperatures (e.g. from a person moving around in front of the camera) to determine if there is motion. PIR motion detection is less effective at higher temperatures.

 **NOTE**

- You may also select both PIR and Motion to receive alarms from both motion triggers.

- **Schedule:** Create audio alarms based on the settings set in the Scheduling menu.
 - **Disable:** Disable speaker alarms.
5. Under **Alarm Loop Times**, select the number of times you would like the speaker alarm to repeat when alarms occur. Tap **Done**.
6. Tap **Alarm Test** to sound a test alarm.
7. Tap **Update** to save your settings.


14.4.13 Configuring microSD Recording

Configure video recording to the microSD card (required; not included). To playback recordings saved on the microSD card, use L-View or the iPhone®, iPad®, or Android™ apps.

To configure microSD card recording:

1. Make sure a microSD card (not included) is inserted into the camera. It is recommended to format the microSD card before using it with the camera.
2. In Camera List, tap  next to the camera you would like to edit.
3. Tap **Camera Settings**.

4. Tap **Schedule** then **SD-Card**.

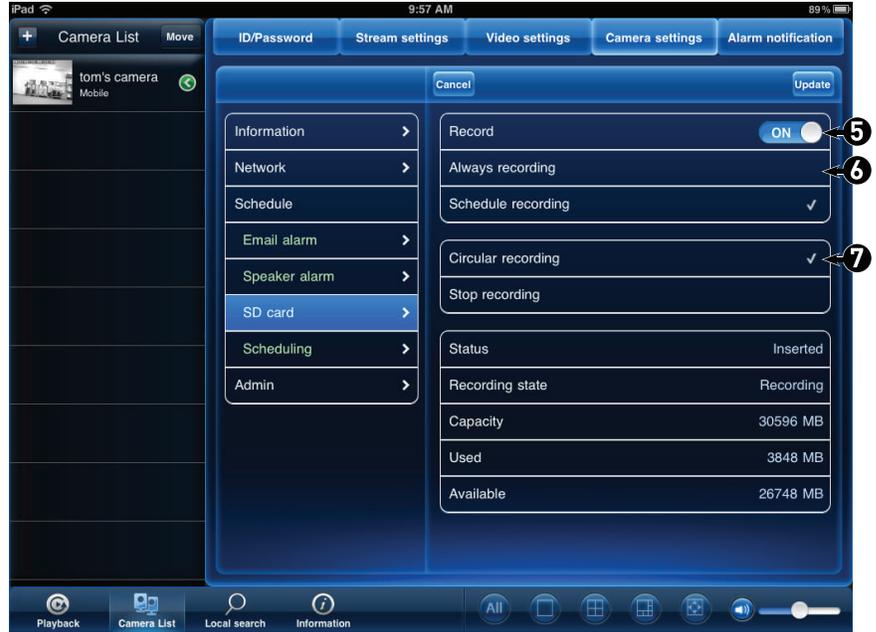

5. Under **Recording**, select **ON** to enable microSD recording or **OFF** to disable.
6. Check one of the following recording options:
 - **Always Recording:** Camera will record continuously at all times.
 - **Schedule Recording:** Camera will record according to settings set in the recording schedule.

NOTE

To enable Motion detection recording using iPad®, you must use Schedule recording. Then, create a schedule in the Scheduling menu with Motion trigger, PIR trigger, or both Motion trigger and PIR trigger selected.


7. Check **Circular recording** to set the camera to overwrite the oldest recordings when the microSD card is full or select **Stop recording** to set the camera to stop recording when the microSD card is full.
8. Tap **Update** to save your settings.

14.4.14 Configuring the Camera Recording and Alarm Schedule

Configure schedules for recording and alarms. Schedules can be configured separately for alarms and recording. You can configure up to 12 schedules.

To create a schedule for alarms or recording:

1. First, you must enable alarms or recording to use the schedule.
2. In Camera List, tap  next to the camera you would like to edit.
3. Tap **Camera Settings**.
4. Tap **Schedule** then **Scheduling**.

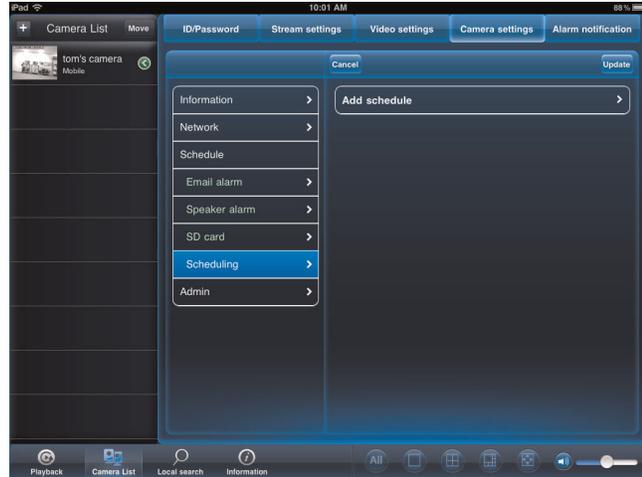
5. Tap **Add Schedule**.

6. Under **Email Alarm**, check **Motion trigger** to send an email alarm based on video motion, check **PIR trigger** to use the PIR motion sensor, or select both.
7. Under **Speaker Alarm**, check **Motion trigger** to activate the siren based on video motion, check **PIR trigger** to use the PIR motion sensor, or select both.
8. Under **SD card record**, check **Continuous** for the camera to record to microSD continuously during the scheduled time. Check **Motion trigger** to record when video motion is triggered during the scheduled time, select **PIR trigger** to record when the PIR motion sensor is triggered during the scheduled time, or select both.



9. Under **Time period**, select one of the following:

- **Every week:** Create a weekly recording schedule. Tap  and check the days you would like the schedule to apply to. Tap **Start** and **End** and use the sliders to configure the start and end time for the schedule. Tap **Done**.
- **Every day:** Create a daily recording schedule. Tap  then tap **Start** and **End** and use the sliders to configure the start and end time for the schedule. Tap **Done**.
- **Fixed time:** Create a one time schedule (for example, if you are going on vacation, and would like to record all the time). Tap  then set the **Start** and **End** using the sliders to configure the exact date and time when you would like the schedule to start and end. Tap **Done**.

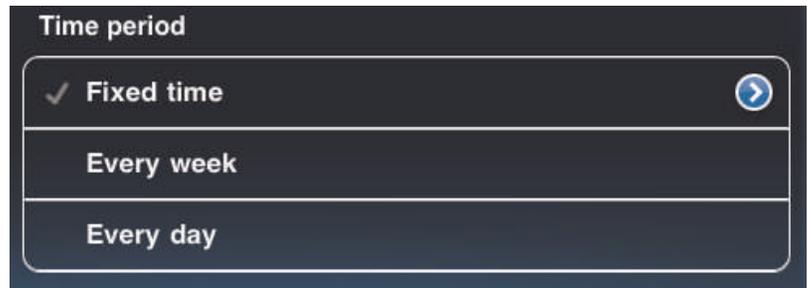

10. Tap **Done** to save the schedule. Tap **Update** to save your settings.

To delete a Schedule:

1. From the Scheduling menu, swipe the schedule you would like to delete from left to right.
2. Tap **Delete**.
3. Tap **Update** to save your changes.

14.4.15 Configuring the Camera Date and Time

Configure the camera date and time. The camera syncs with an Internet NTP time server to automatically provide the correct time, once you have configured your time zone and daylight savings time settings.

To set the camera date and time:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Camera Settings**.

3. Tap **Admin** then **Date/Time**.



4. Tap **Time Zone**.
5. Use the slider to select your time zone.
 - If your region observes Daylight Savings Time, check **Daylight Savings Time**. Tap **Start Time** and **End Time**, use the sliders to configure the start and end time for Daylight Savings Time and then tap **Done**.



6. Tap **Update** to save your changes. Tap **OK**. The camera will reboot to apply the new time zone.

14.4.16 Rebooting the Camera


1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Camera Settings**.
3. Tap **Admin** then **Reboot**.
4. Tap **OK** to confirm.

14.5 Using Local Search to Add Cameras

You can use the Local Search Menu to automatically add the ID's for cameras on your local network.

To add cameras using local search:

1. Tap the Local Search button ().
2. Lorex Ping automatically scans for cameras on your local network. Tap **Search** to re-scan.

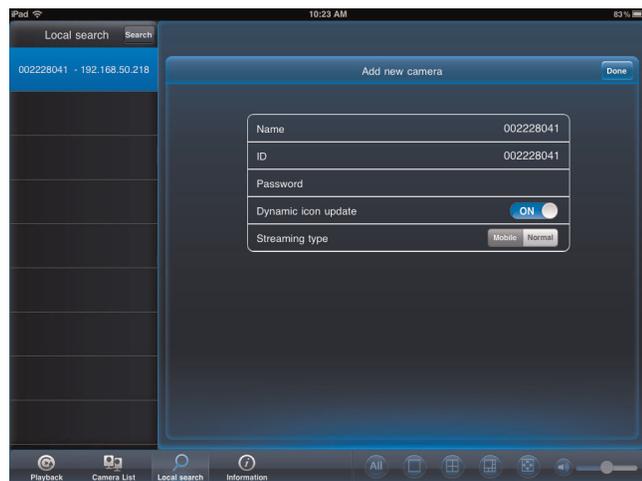


3. Tap a camera from the list. The Add camera screen comes on with the camera ID already entered.
4. Enter a **Name** of your choice and enter the camera **Password**. If you have not connected to your camera before, the password is **lorex**.
5. Tap **Done**. The camera is now added to camera list. Tap the Camera List button (), and then tap the camera name in Camera List to connect to the camera.

The app for Android™ is called **Lorex Ping**. For instructions on connecting to your camera using Android™, see 8 *Connecting to Your Camera on Android™*, page 19.

15.1 Live Viewing with Lorex Ping for Android™

You can use Lorex Ping in portrait or landscape mode. Tilt the phone to switch between portrait or landscape.

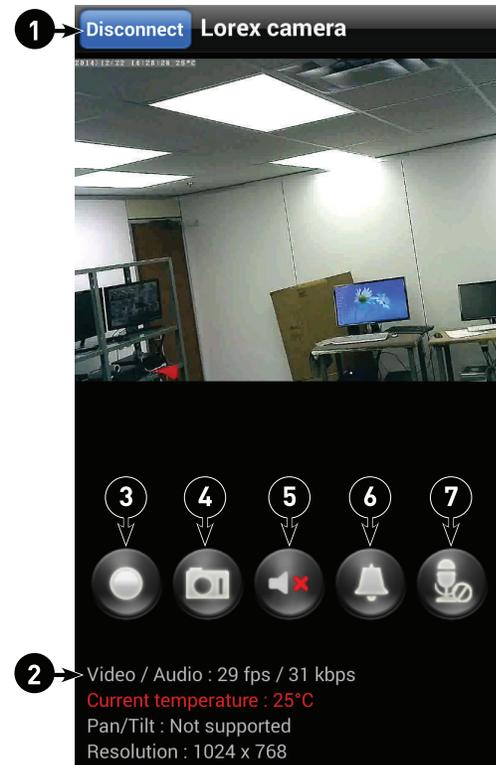

1. Disconnect button (only shown in portrait mode)
2. Video information
3. Start / stop manual recording
4. Save a snapshot of the camera on your phone
5. Turn on the audio stream from the camera's microphone
6. Play an audio alarm on the camera (requires speaker)
7. Activate 2-way-audio (Intercom) using the phone microphone (requires speaker)

15.1.1 Using 2-way Audio (Intercom)

1. Touch  to activate 2-way-audio (intercom) using the phone microphone.
2. Touch  again to turn off 2-way audio.

15.1.2 Saving Snapshots

- Touch  to take a snapshot from the camera. Snapshots are saved in .png format to the *DCIM/Lorex Ping* folder on your device. To view or copy Snapshots to your

computer, connect your device to your computer using a USB cable. See your Android™ device's Instruction Manual for details.

15.1.3 Recording Video to Android™

You can manually record video to the built-in memory on your Android™ device.

To record video to your Android™ device:

1. Press the record button () to begin recording.
2. Press the record button () again to stop recording. To view the recorded video, see below.

15.2 Playing Back Video Recorded to your Android™ Device

After using the record button to manually record video to your Android™ device, you can use Lorex Ping to play it back.

To playback video recorded to your Android™ device:


1. From the Camera List, tap **Play Back** () .
2. Tap the camera you would like playback.



3. Select the date that you would like to playback video from, and then tap a video file to open it.



- Use the on-screen controls to control playback. Tap **Disconnect** to close the file.

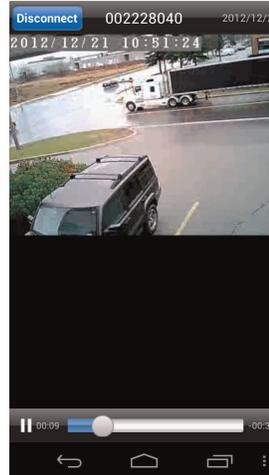


15.3 Playing Back Video Recorded on microSD on Android™

You can playback video recorded on the camera microSD card (not included) on your Android™ phone or tablet. For details on setting up microSD recording, see 15.4.14 *Enabling microSD Recording*, page 126.

To play back video recorded on the camera microSD card:

- Tap Camera List . Then tap  next to the camera you want to view recordings for.
- Tap **SD card playback**.
- The camera scans for available video files. Files are shown in a list according to the date they were recorded.

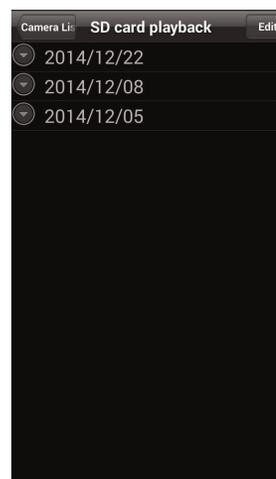

-
4. Tap a day to view recordings for that day. Tap a recording to view it.




15.3.1 Deleting Video Recordings on microSD


You can delete video recorded on the camera microSD card (not included) using your Android™ phone or tablet. For details on setting up microSD recording, see 15.4.14 *Enabling microSD Recording*, page 126.

To delete video recordings:

1. Tap Camera List . Then tap  next to the camera with recordings you want to delete.
2. Tap **SD card playback**. The camera scans the microSD card for recorded video files and shows a list of days with recorded video.
3. Tap **Edit**.

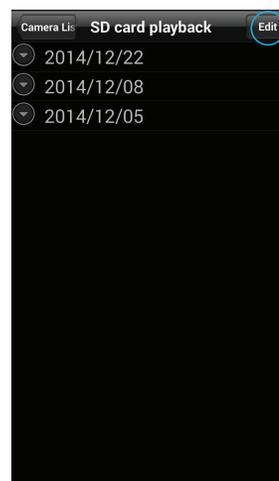

4. Tap a day to view recordings created on that day.

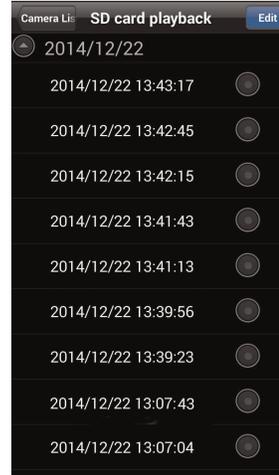


5. Tap  next to the video recording you would like to delete, then tap **OK** to confirm.

15.4 Using Camera List to Edit Camera Settings

You can use the Camera List to adjust the connection or other settings for your camera.

To access Camera Settings:

- Tap Camera List . Then tap  next to the camera you would like to edit. The Camera List Settings Menu appears.

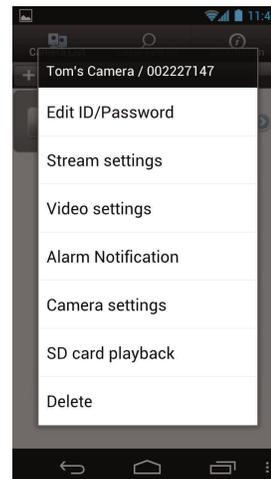

NOTE


For certain menus, you will need to enter the camera admin user name and password before you may change settings. By default, the admin user name is **admin** and the password is **left blank**.

15.4.1 Editing Camera Connection Settings

You can edit your camera connection information. This is useful if you change the password of the camera or if you want to save the admin user name and password, so you don't have to enter it to make settings changes.

To edit camera connection settings:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Edit ID/Password**.

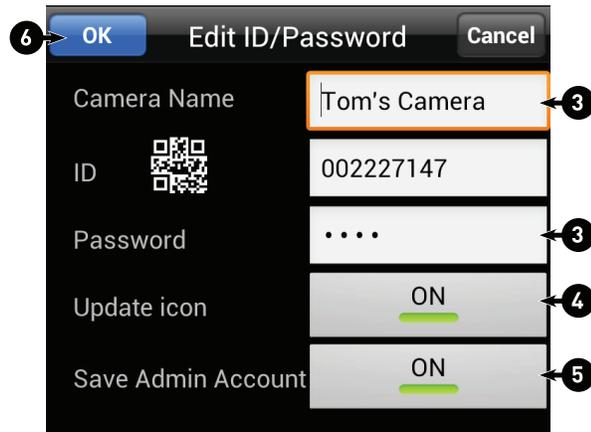

3. Edit the **Camera Name** and **Password** as needed.
4. Under **Update icon**, select **ON** for the camera to update the icon shown in Camera List every time you connect to it or **OFF** for the icon to remain as is.
5. Under **Save Admin Account**, select **ON** to save the admin user name and password, so you do not have to enter it when making setting changes. Or, select **OFF** to not save the admin user name and password. The admin user name and password will be saved the next time you enter it to make a setting change.
6. Tap **OK** to save changes.

15.4.2 Deleting Cameras from Camera List

1. In Camera List, tap  next to the camera you would like to delete.
2. Tap **Delete**.


15.4.3 Editing Camera Mobile Streaming Settings

Configure the camera image quality settings for streaming to mobile devices (i.e. smart phones and tablets). Please note that less bandwidth is generally available over mobile networks than over WiFi or Ethernet.

To edit mobile streaming settings:

1. In Camera List, tap  next to the camera you would like to edit.


2. Tap **Stream Settings**.

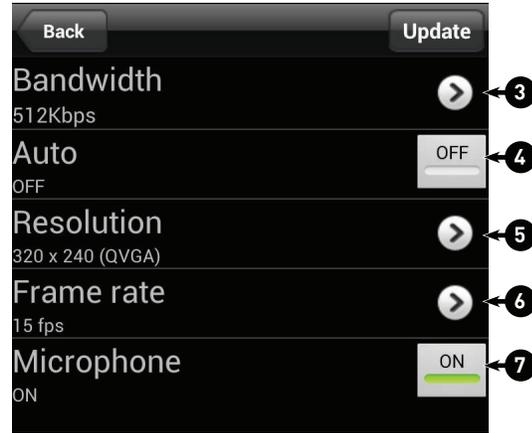

3. Under **Bandwidth**, select the bandwidth for your mobile connection. If you are mainly connecting using WiFi, you may set this setting higher.
4. Under **Auto**, tap to select **ON** to have the camera automatically select the resolution and frame rate based on available bandwidth. If you choose to set the resolution and frame rate automatically, go straight to step 7. Or, select **OFF** to manually select the resolution (step 5) and frame rate (step 6). If you select OFF, configure the following:
5. Under **Resolution**, select the resolution that will be used when connecting to the camera using a smart phone or tablet: **320x240**, **480x360**, **640x400**, **1024x768**, or **1280x800**.
6. Under **Frame rate**, select the frame rate that will be used when connecting to the camera using a smart phone or tablet between **30fps** (highest) and **1fps** (lowest).
7. Under **Microphone**, tap to select **OFF** to turn off audio streaming to your mobile device or tap to select **ON** to turn on audio streaming to your mobile device.
8. Tap **Update** to save your settings.

15.4.4 Editing Camera Video Settings

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Video Settings**. Then tap **Video**.

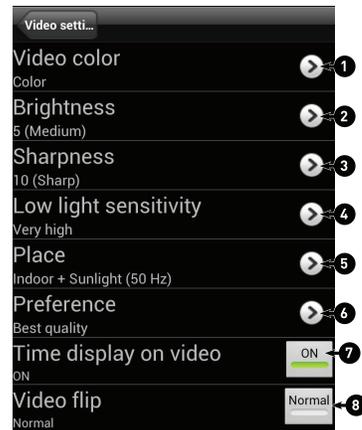

3. Configure the following:


-
- 3.1. **Video color:** Select Color to view the camera in color or select Black & white.
 - 3.2. **Brightness:** Manually adjust the brightness of the image between 10 (highest) and 1 (lowest).
 - 3.3. **Sharpness:** Manually adjust the sharpness of the image between 10 (highest) and 1 (lowest).
 - 3.4. **Low Light Sensitivity:** Set the camera's sensitivity in low light environments between Very High (highest), High, and Normal (lowest).
 - 3.5. **Place:** Select **Outdoor video** for well lit environments. Select **Indoor Video** if you notice strip lines in the image or if the picture is too dark on the Outdoor video setting. Select **Indoor video + sunlight** if the picture is too bright on the Indoor Video setting.
If you select an indoor settings, select **60Hz light freq** or **50Hz light freq** to adjust the camera for the frequency of your indoor lighting.
 - 3.6. **Preference:** Select whether you would like the camera to reduce the image quality or the frame rate when bandwidth increases or decreases. Select **Video Motion** to have the camera maintain the frame rate and reduce image quality when bandwidth is insufficient. Select **Image Quality** to have the camera maintain image quality and reduce frame rate when bandwidth is insufficient. Select **Better Quality** to have the camera maintain frame rate and increase quality when bandwidth is sufficient. Select **Best Quality** to have the camera maintain the frame rate and increase quality to the maximum speed of the connection.
 - 3.7. **Time Display on Video:** Tap to select **ON** to enable time stamps on video or **OFF** to disable time stamps.
 - 3.8. **Video flip:** Tap to select Video Flip to flip the camera image vertically and horizontally or select **Normal** for the normal orientation. This is useful if the camera has been mounted to a wall or ceiling upside down.
4. Tap **Video Settings** when finished making changes, then tap **Update** to save your settings.

15.4.5 Configuring LED Control and Motion Detection Sensitivity

Configure the behavior of the camera's status LED's. This is useful if you want the camera to be harder to spot at night. You can also configure the sensitivity for video motion detection.

To configure LED's and motion detection sensitivity:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Video Settings**. Then tap **Control**.

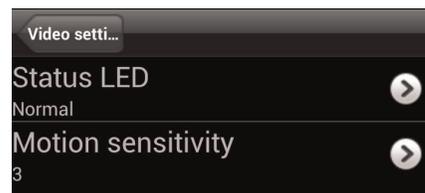

3. Under **Status LED**, select one of the following:
 - **Normal:** LED's will function as normal. For details on LED functions, see 3 *Camera Overview*, page 3 or .
 - **Always turn off:** LED's are turned off at all times.
 - **Turn off after network connected:** LED's turn on when the camera is powered on and turn off once a network connection is made.

-
- Under **Motion Sensitivity**, select the motion detection sensitivity between **1** (High) and **10** (Low). If Motion Detection Sensitivity is set to 1, motion detection will be triggered if a moving object is larger than 1% of the video area. If it is set to 10, a moving object must be larger than 10% of the video area to trigger motion detection.

**NOTE**

This setting does not affect the PIR motion detector.


- Tap **Video Settings** when finished making changes, then tap **Update** to save your settings.

15.4.6 Configuring Night Mode Settings

Configure when the camera uses day or night mode. When day mode is on, the camera sees in color. When night mode is on, the camera sees in black and white, and the Infrared LED turns on to enable night vision.


To configure Day/Night mode:

- In Camera List, tap  next to the camera you would like to edit.
- Tap **Video Settings**. Then tap **Night Mode Control**.




3. Select one of the following:

- **Auto:** Camera will automatically switch between day mode or night mode, based on the amount of light in the room.
- **Schedule:** Camera will switch between day mode and night mode at scheduled times each day. If using this option, tap under **Schedule time of night mode**, use the sliders to set the **Start** time (when night mode begins each day) and **End** time (when night mode ends each day), then tap **OK**.




- **Manual:** Manually select day mode or night mode. If using this option, select **Day** for day mode or **Night** for night mode.



4. Tap **Update** to save your changes.

15.4.7 Enabling Motion/Sound Push Alarm Notifications


Push Alarm Notifications can be set up to create a notification straight to your Android™ device when motion or sound is detected by the camera. Push Alarm Notifications go directly to the notifications area on your device.

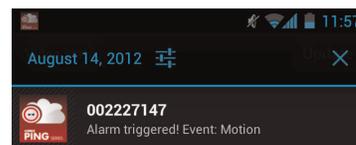

To enable Push Alarm Notifications:

1. In Camera List, tap  next to the camera you would like to edit.

2. Tap **Alarm Notification**.




3. Under **Motion**, tap to select **ON** to enable Push Alarm Notifications when motion is detected using video motion detection or **OFF** to disable.
4. Under **PIR**, tap to select **ON** to enable Push Alarm Notifications when motion is detected using the PIR motion sensor or **OFF** to disable.
5. Under **Sound**, tap to select **ON** to enable Push Alarm Notifications when sound is detected by the camera or **OFF** to disable. Under **Sound Sensitivity**, select a sensitivity for Sound Push Alarm Notifications between **1** (lowest) and **10** (highest).
6. Tap **Update** to save your settings.

15.4.8 *Configuring Temperature Push Notifications and Temperature Units (Fahrenheit or Celsius)*

Temperature Push Notifications can be set up to send you alerts if the temperature near the camera goes higher or lower than the specified values. You can also select the temperature unit that will be used by the system.

To configure temperature push notifications:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Alarm Notification**.

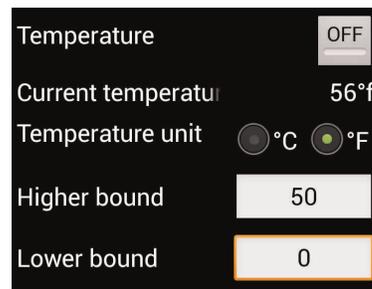

3. Under **Temperature**, select **ON** to enable temperature push notifications.
4. Under **Temperature unit**, select **°C** or **°F**.
5. Under **Higher bound**, select the high temperature value. You will receive a notification if the temperature near the camera goes above this value.
6. Under **Lower bound**, select the low temperature value. You will receive a notification if the temperature near the camera goes above this value.
7. Tap **Update** to save your settings.


15.4.9 *Viewing the Temperature Chart*

The temperature line chart displays changes in the temperature near the camera.


**NOTE**

The camera requires a temperature sensor in order to use this feature. LNC226X does not have a temperature sensor.

1. In Camera List, tap  next to the camera.
2. Tap **Temperature Chart**. The temperature chart displays temperatures for the past 30 days.

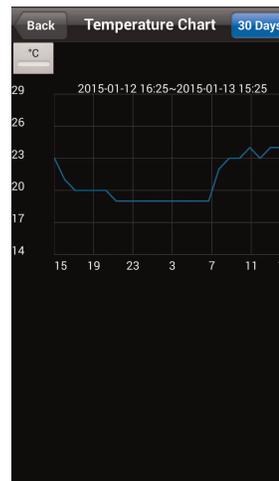

3. Tap **30 Day** to switch the time period to the past 24 hours. Tap again to switch to the past 30 days.

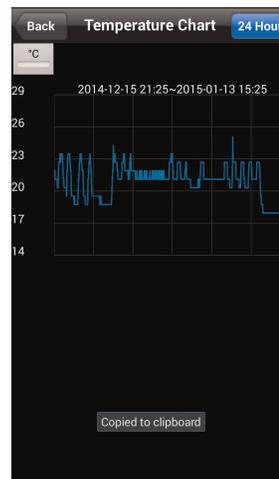


4. Tap  to switch the temperature unit to °F.

15.4.10 Editing Camera Wired Network Settings

Configure the camera IP address when connected using Ethernet. Select DHCP or Fixed IP.

To edit camera wired network settings:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Camera Settings**.
3. Tap **Network** then **Wired Network**.



4. Select **DHCP** (recommended) to allow the camera to automatically obtain an IP address from the router or **Static** to use fixed IP address settings. If you select Static, configure your **IP Address**, **Subnet mask**, **Default gateway**, **DNS1**, and **DNS2**.
5. Tap **Update** to save your settings.

15.4.11 Editing Camera WiFi Network Settings

Configure WiFi network settings for the camera.

To edit camera WiFi settings:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Camera Settings**.
3. Tap **Network** then **WiFi Network**.




4. Check **WiFi** to enable WiFi on the camera and scan for available networks.
5. Tap a WiFi network and enter the password to connect.
 - To connect to a hidden WiFi network, tap **Other**. Enter the **SSID**, select the security type, and tap **Add**. Tap the network name from the list and enter the password.
6. Wait for the update to complete.
7. Remove the Ethernet cable from the camera. It will connect to the WiFi network. When it is connected, the blue Network LED will be on or flashing.
8. Tap **Camera Settings** then **Camera List** to exit the edit camera screen.
9. Tap the camera in the Camera List to connect. If you cannot connect, check to make sure you have entered the correct wireless password and that the camera is in signal range of your wireless router.

15.4.12 Enabling Email Notifications

Configure email alarms. The camera can be set up to send email alerts when motion is detected. Email alarms include a .jpg attachment.

To enable email notifications:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Camera Settings**.
3. Tap **Schedule** then **Email Alarm**.

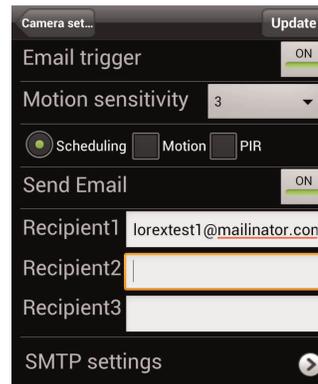

4. Under **Email trigger**, tap to select **ON** to enable email notifications or **OFF** to disable. Then under **Send Email**, tap to select **ON** to enable email notifications.
5. Under **Motion sensitivity**, select the motion detection sensitivity between **1** (High) and **10** (Low). If Motion Detection Sensitivity is set to 1, motion detection will be triggered if a moving object is larger than 1% of the video area. If it is set to 10, a moving object must be larger than 10% of the video area to trigger motion detection.



NOTE

This setting does not affect the PIR motion detector.

6. Select from the following trigger options for email alarms:
 - **Motion:** Use Video motion detection to trigger email alarms. Video motion detection looks for movement in the image to determine if there is motion. This means that there may be false alarms caused by changes in lighting, trees moving in the wind, etc.
 - **PIR:** Use the PIR motion detector to trigger email alarms. The PIR motion detector uses changes in temperatures (e.g. from a person moving around in front of the camera) to determine if there is motion. PIR motion detection is less effective at higher temperatures.



NOTE

- You may also select both PIR and Motion to receive alarms from both motion triggers.

7. Enter up to 3 email addresses under **Recipient1~3** that will receive email alarms.

8. Tap **Update** to save your changes.


 NOTE
<p>If you want to use a custom SMTP server to send Email messages, click SMTP Settings, enter your SMTP server information, and tap OK.</p>

15.4.13 Enabling Speaker Alarms

Configure the siren. The siren can be set up to go off when the camera detects motion. This is helpful if you want to scare off intruders.

To configure speaker alarms:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Camera Settings**.
3. Tap **Schedule** then **Speaker Alarm**.

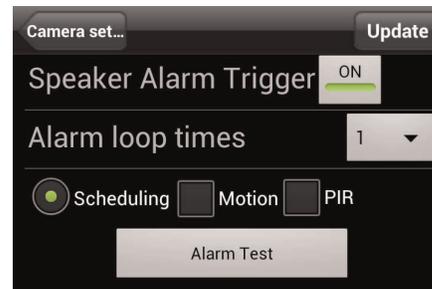

4. Under **Speaker Alarm Trigger**, tap to select **ON** to enable speaker alarms or **OFF** to disable.
5. Under **Alarm Loop Times**, select the number of times you would like the speaker alarm to repeat when alarms occur.
6. Select from the following speaker alarm triggers:
 - **Motion:** Use Video motion detection to trigger audio alarms. Video motion detection looks for movement in the image to determine if there is motion. This means that there may be false alarms caused by changes in lighting, trees moving in the wind, etc.
 - **PIR:** Use the PIR motion detector to trigger audio alarms. The PIR motion detector uses changes in temperatures (e.g. from a person moving around in front of the camera) to determine if there is motion. PIR motion detection is less effective at higher temperatures.

 NOTE
<ul style="list-style-type: none"> • You may also select both PIR and Motion to receive alarms from both motion triggers.

- **Scheduling:** Create audio alarms based on the settings set in the Schedule.
7. Tap **Alarm Test** to sound a test alarm.
 8. Tap **Update** to save your settings.

15.4.14 Enabling microSD Recording

Configure video recording to the microSD card (required; not included). To playback recordings saved on the microSD card, use L-View or the iPhone®, iPad®, or Android™ apps.

To configure microSD card recording:

1. Make sure a microSD card (not included) is inserted into the camera. It is recommended to format the microSD card before using it with the camera.
2. In Camera List, tap  next to the camera you would like to edit.
3. Tap **Camera Settings**.
4. Tap **Schedule** then **SD-Card**.



5. Under **Recording**, tap to select **ON** to enable microSD recording or **OFF** to disable.
6. Select one of the following recording options:
 - **Always Recording:** Camera will record continuously at all times.
 - **Schedule Recording:** Camera will record according to settings set in the recording schedule.



NOTE

To enable Motion detection recording using Android™, you must use Schedule recording. Then, create a schedule in the Scheduling menu with **Motion trigger**, **PIR trigger**, or both Motion trigger and PIR trigger selected.

7. Under **When disk space full**, select **Circular recording** to set the camera to overwrite the oldest recordings when the microSD card is full or select **Stop recording** to set the camera to stop recording when the microSD card is full.
8. Tap **Update** to save your settings.


15.4.15 Configuring the Recording and Alarm Schedule

Configure schedules for recording and alarms. Schedules can be configured separately for alarms and recording. You can configure up to 12 schedules.

To create a schedule for alarms or recording:


1. First, you must enable alarms or recording to use the schedule.
2. In Camera List, tap  next to the camera you would like to edit.
3. Tap **Camera Settings**.

4. Tap **Schedule** then **Scheduling**.
5. Tap **Add Schedule**.

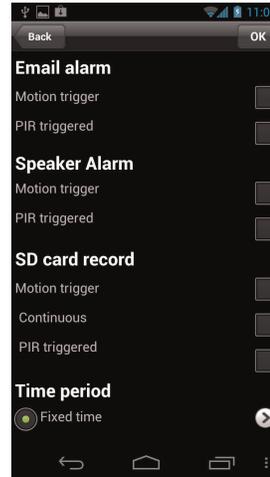

6. Under **Email Alarm**, check **Motion trigger** to send an email alarm based on video motion, select **PIR trigger** to use the PIR motion sensor, or select both.
7. Under **Speaker Alarm**, check **Motion trigger** to create a speaker alarm based on video motion, check **PIR trigger** to use the PIR motion sensor, or select both.
8. Under **SD card record**, check **Continuous** for the camera to record to microSD continuously during the scheduled time. Check **Motion trigger** to record when video motion is triggered during the scheduled time, select **PIR trigger** to record when the PIR motion sensor is triggered during the scheduled time, or select both.

9. Under **Time period**, select one of the following:

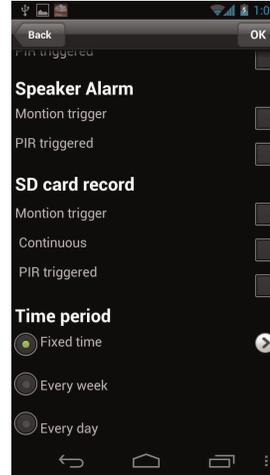


- **Every week:** Create a weekly recording schedule. Tap  and check the days you would like the schedule to apply to. Tap **Start** and **End** and use the sliders to configure the start and end time for the schedule. Tap **OK**.
- **Every day:** Create a daily recording schedule. Tap  then tap **Start** and **End** and use the sliders to configure the start and end time for the schedule. Tap **OK**.
- **Fixed time:** Create a one time schedule (for example, if you are going on vacation, and would like to record all the time). Tap **Start** and **End** and use the sliders to configure the exact date and time when you would like the schedule to start and end. Tap **OK**.


10. Tap **OK** to save the schedule. Tap **Update** to save your settings.

To delete a Schedule:

1. From the Scheduling menu, press the Android™ menu button and tap **Delete**.

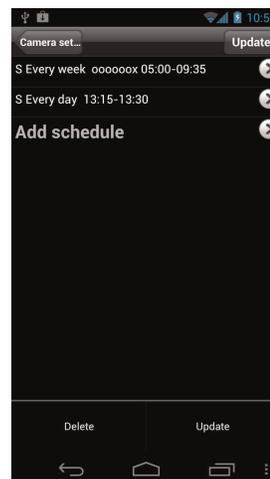

2. Select the schedule you want to delete and tap **Delete**.

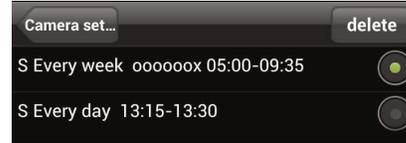


3. Tap **Update** to save your changes.

15.4.16 Configuring the Camera Date and Time


Configure the camera date and time. The camera syncs with an Internet NTP time server to automatically provide the correct time, once you have configured your time zone and daylight savings time settings.

To set the camera date and time:

1. In Camera List, tap  next to the camera you would like to edit.
2. Tap **Camera Settings**.
3. Tap **Admin** then **Date/Time**.
4. Tap **Time Zone**.

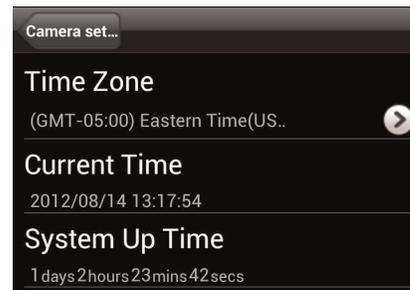

5. Use the slider to select your time zone.
6. If your region observes Daylight Savings Time, check **Daylight Savings Time**. Tap **Start Time** and **End Time**, use the sliders to configure the start and end time for Daylight Savings Time and then tap **OK**.



7. Tap **Update** to save your changes. The camera will reboot to apply the new time zone.

15.4.17 Rebooting the Camera

1. In Camera List, tap  next to the camera you would like to edit.

2. Tap **Camera Settings**.
3. Tap **Admin** then **Reboot**.
4. Tap **OK** to confirm.

15.5 Using Local Search to Add Cameras

You can use the Local Search Menu to automatically add the ID's for cameras on your local network.

To add cameras using local search:

1. Tap the Local Search button (Local Search).



2. Lorex Ping automatically scans for cameras on your local network. Tap **Search** to re-scan.
3. Tap a camera from the list. The Add camera screen comes on with the camera ID already entered.
4. Enter a **Camera Name** of your choice and enter the camera **Password**. If you have not connected to your camera before, the password is **lorex**.
5. Tap **OK**. The camera is now added to camera list. Tap the camera name in camera list to connect to the camera.

Configuring Camera Settings Using a Browser

Web Configure lets you modify camera settings using a web browser.

To access Web Configure:

1. Open L-View, right-click on the camera ID under Auto Search, and click **Web configure**.



NOTE

Your computer must be on the same network as the camera to use Web Configure. You may change camera settings over the Internet using the iPhone®, iPad®, or Android™ apps.

2. Enter the camera admin user name and password. By default, the admin user name is **admin** and the admin password field is **left blank**. Click **Log in**. The Web Configure interface opens in your default web browser.



NOTE

Your camera admin user name and password differs from the password used to connect to your camera to view video.

16.1 Web Configure Overview

IP CAM Information	
Model	wireless / v030306 / plus
IP CAM ID	002-227-147
Registration status	Registered(3)
Network type	Wired(DHCP) - (ip=192.168.50.182)
Video user	1
Video resolution	640 x 480
Video bandwidth	1.5M bps
Email ftp Alarm	off
NAS Record	Not Recording
SD-Card Record	Not Recording
Mac Address(Hex)	00:1B:C7:01:E2:92
WiFi Mac Address(Hex)	00:1B:C7:FF:FF:37

1. **Information:** View information about the camera and camera settings.
2. **Network:** Configure wired/wireless network settings. Connect to a wireless network.
3. **Video:** Configure camera video and streaming settings.
4. **Schedule:** Configure recording settings and schedules. Configure email and audio alarms.
5. **Admin:** Configure the camera date and time, passwords, and LED's. Restart the camera. Perform system upgrades.
6. **Language:** Select the language for the Web Configure interface.

16.2 Network

Configure networking settings for WiFi or Ethernet connection.

16.2.1 Wired Network (DHCP or Fixed IP)

Configure the camera IP address when connected using Ethernet. Select DHCP or Fixed IP.

Network Settings(For wired ethernet)				
<input type="radio"/> Obtain an IP address automatically				
<input checked="" type="radio"/> Use the following IP address				
IP address	192	168	5	123
Subnet mask	255	255	255	0
Default gateway	192	168	5	1
<input type="radio"/> Obtain DNS server address automatically				
<input checked="" type="radio"/> Use the following DNS server address				
Preferred DNS server	208	67	222	222
Alternate DNS server	168	95	192	1
<input type="button" value="Save & Apply"/>				

To configure the camera to use DHCP or fixed IP:

1. Select one of the following:
 - **Obtain an IP address automatically (recommended):** Use DHCP and allow the camera to obtain an IP address from the router automatically.
 - **Use the following IP address:** Use a fixed IP address and manually enter the IP address information.
2. If you selected Use the following IP address, configure the following:
 - **IP address:** Enter the IP address the camera will use. Make sure it is available on your network.
 - **Subnet mask:** Enter the Subnet Mask.
 - **Default Gateway:** Enter the Default Gateway address.
 - **Obtain DNS server address automatically:** Select to have the camera automatically select a DNS server.
 - **Use the following DNS server address:** Select and then manually enter DNS server information.
3. Click **Save & Apply**.

16.2.2 WiFi Security (Configuring WiFi settings)

Configure the camera to connect to a WiFi network and configure WiFi settings.

To configure WiFi Settings:



NOTE

For instructions on connecting your camera to a WiFi network, see 9.2 *PC WiFi Setup*, page 26 or 10.2 *Mac WiFi Setup*, page 32.

1. Perform one of the following:

- To Scan available WiFi networks, click **WiFi Scan**.
- To connect to a hidden WiFi network, select **Enable Wifi function**, and manually fill out the **SSID**, **Security mode** (i.e. encryption type), and the **WEP** or **WPA-PSK Key**. Click **Save & Apply**. Refresh the page and select **WiFi test**. When the test is successful, disconnect the camera from Ethernet.
- To configure a fixed IP address for the camera when connected over WiFi, click **IP address**, configure the settings as needed, and click **Save & Apply**.
- To test configured WiFi settings, click **WiFi test**.

16.3 Video

Configure camera video and streaming settings.

16.3.1 Video Settings

Adjust the video quality settings. Set the password to access camera video through L-View or apps.

To set the camera password for accessing video through L-View or apps:

1. Under **Password (play video)**, enter a password to access the camera video using L-View or smart phone and tablet apps.
2. Click **Save & Apply** to save the new password.


To configure camera video quality settings:

TIP: Change only one camera image quality setting at a time before clicking **Save & Apply** so you can judge the effects.

1. Configure the following, as needed:
 - **Internet speed:** Select the upload speed of your Internet connection. If your Internet connection is faster than 1.5Mbps, select 1.5Mbps.
 - **Adjust resolution and frame rate automatically:** Select to allow the camera to adjust the video resolution and frame rate based on available bandwidth.
 - **Use the following values:** Select to manually select the video resolution and frame rate for the camera. Note that the image quality may decrease if there is not enough bandwidth for your selected settings.
 - **Resolution:** Manually select either **320x240**, **640x480**, **1024x768**, or **1280x800** resolution. Higher resolution will give you a better, more detailed picture, but requires more bandwidth. Lower resolution allows the camera to maintain a higher frame rate when available bandwidth is low.
 - **Frame rate:** Manually select the frame rate between **30fps** (highest) and **1fps** (lowest). 30fps is real time video, meaning that movement in the image will appear smooth, with no choppiness.
 - **Favor/Preference:** Select whether you would like the camera to reduce the image quality or the frame rate when bandwidth increases or decreases. Select **Video Motion** to have the camera maintain the frame rate and reduce image quality when bandwidth is insufficient. Select **Image Quality** to have the camera maintain image quality and reduce frame rate when bandwidth is insufficient. Select **Better Quality** to have the camera maintain frame rate and increase quality when bandwidth is sufficient. Select **Best Quality** to have the camera maintain the frame rate and increase quality to the maximum speed of the connection.
 - **Brightness:** Manually adjust the brightness of the image between **10** (highest) and **1** (lowest).
 - **Sharpness:** Manually adjust the sharpness of the image between **10** (highest) and **1** (lowest).
 - **Low Light Sensitivity:** Set the camera's sensitivity in low light environments between **Very High** (highest), **High**, and **Normal** (lowest).
 - **Video color:** Select **Colored** to view the camera in color or select **Black & white**.
 - **Video flip:** Select **Video Flip** to flip the camera image vertically and horizontally or select **Normal** for the normal orientation. This is useful if the camera has been mounted to a wall or ceiling upside down.
 - **Outdoor video/Indoor video/Indoor video + sun light:** Select **Outdoor video** for well lit environments. Select **Indoor Video** if you notice strip lines in the image or if the picture is too dark on the Outdoor video setting. Select **Indoor video + sunlight** if the picture is too bright on the Indoor Video setting.
 - **60Hz light freq/50Hz light freq:** If necessary, select **60Hz light freq** or **50Hz light freq** to adjust the camera for the frequency of your indoor lighting. These settings are not available when the camera is set to Outdoor video.
 - **Enable audio microphone/Disable audio microphone:** Select **Disable audio microphone** to disable the built-in microphone in the camera or select **Enable audio microphone** to enable it.
 - **Enable time display/Disable time display:** Select **Disable time display** to turn off video time stamps or **Enable time display** to turn on video time stamps.
2. Click **Save & Apply** to apply the settings to the camera. You may need to reconnect to the camera after making settings changes.

16.3.2 Mobile Video

Set streaming settings for connecting using a smartphone or tablet. Note that less bandwidth is generally available when connecting to the camera over a mobile cellular network than when connecting using broadband Internet.

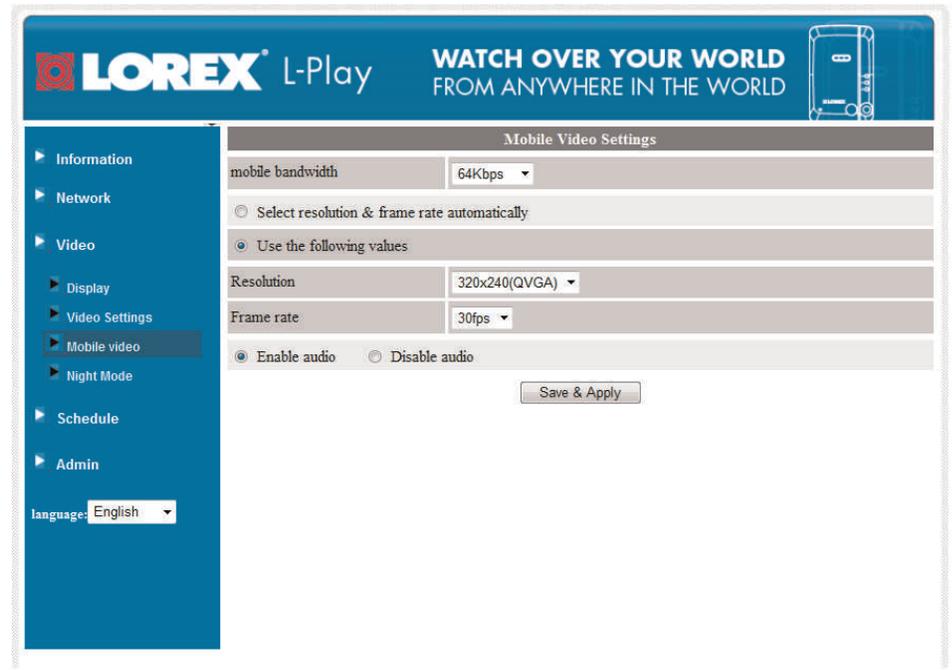


To configure mobile streaming settings:

1. Under **Mobile bandwidth**, select your available mobile bandwidth. If you are primarily connecting using WiFi, you may set this setting higher.
2. Select either **Select resolution & frame rate automatically** to have the camera automatically select the resolution and frame rate based on available bandwidth or select **Use the following values** to manually select the resolution and frame rate.
3. Under **Resolution**, select the resolution that will be used when connecting to the camera using a smartphone or tablet: **320x240**, **480x360**, **640x400**, or **1024x768**.
4. Under **Frame rate**, select the frame rate that will be used when connecting to the camera using a smart phone or tablet between **30fps** (highest) and **1fps** (lowest).
5. Select **Enable audio** to enable audio streaming to smart phones and tablets or **Disable audio** to disable audio streaming to smartphones and tablets.
6. Click **Save & Apply** to apply changes to your camera.

16.3.3 Night Mode

Configure when the camera uses day or night mode. When day mode is on, the camera sees in color. When night mode is on, the camera sees in black and white, and the Infrared LED turns on to enable night vision.

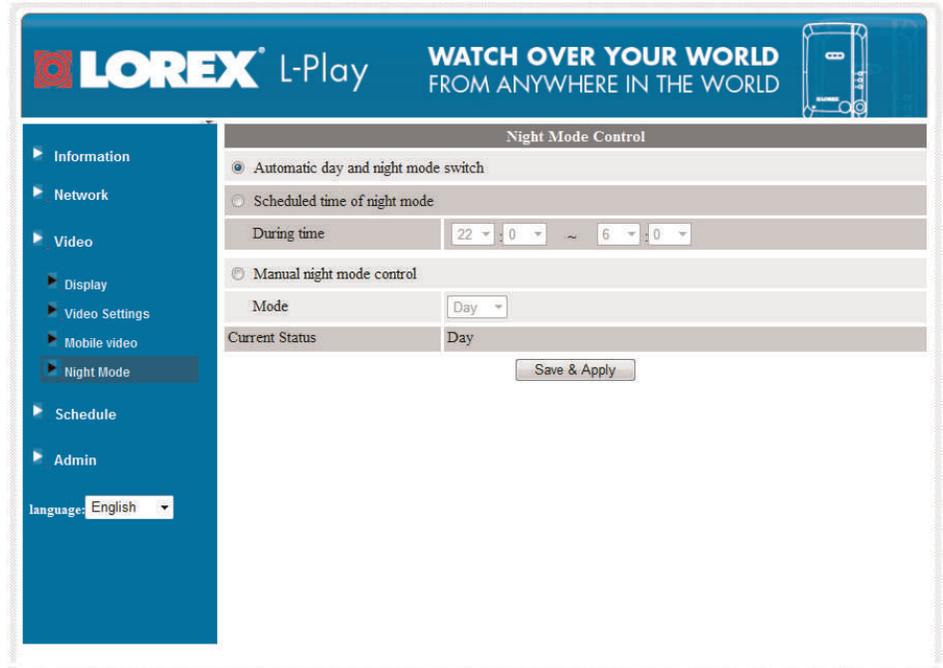

To configure Day/Night mode:

1. Select one of the following:

- **Automatic day and night mode switch:** Camera will automatically switch between day mode or night mode, based on the amount of light in the room.
- **Scheduled time of night mode:** Camera will switch between day mode and night mode at a scheduled times each day. If using this option, use the first set of drop-down menus to select (in 24-hour time) what time the camera will switch to night mode and the second set of drop-down menus to select when the camera will return to day mode.

Scheduled time of night mode

During time: 20:00 ~ 6:00

- **Manual night mode control:** Manually select day mode or night mode. If using this option, under **Mode**, select **Day** for day mode or **Night** for night mode.

Manual night mode control

Mode: Night

2. Click **Save & Apply** to apply your settings to the camera.

16.4 Schedule

Configure recording to microSD card, configure email or speaker alarms, and setup the recording/alarm schedule.

16.4.1 Email/FTP Alarm Settings (Configuring Email Alarms)

Configure email alarms. The camera can be set up to send email alerts when motion is detected. Email alarms include a .jpg attachment.

To configure Email Alarms:

- Under **Email/FTP Trigger**, select one of the following alarm triggers:
 - Motion:** Use Video motion detection to trigger email alarms. Video motion detection looks for movement in the image to determine if there is motion. This means that there may be false alarms caused by changes in lighting, trees moving in the wind, etc.
 - PIR:** Use the PIR motion detector to trigger email alarms. The PIR motion detector uses changes in temperatures (e.g. from a person moving around in front of the camera) to determine if there is motion. PIR motion detection is less effective at higher temperatures.



NOTE

- You may also select both PIR and Motion to receive alarms from both motion triggers.

- Schedule:** Send email alarms based on the settings configured under Schedule. see 16.4.4 *Scheduling (Configuring Recording and Alarm Schedules)*, page 139.
 - Disable:** Disable email alarms.
- If you have selected Motion, under **Motion Sensitivity**, select the motion detection sensitivity between **1** (High) and **10** (Low). If Motion Detection Sensitivity is set to 1, motion detection will be triggered if a moving object is larger than 1% of the video area. If it is set to 10, a moving object must be larger than 10% of the video area to trigger motion detection.



NOTE

This setting does not affect the PIR motion detector.

- Under **Trigger Interval**, enter the minimum time (in seconds) the camera will wait in between email alarms. If this Interval is set too low, you may receive a lot of messages.
- Under **Email Recipient**, enter up to 3 email addresses that will receive email alarms.


- Click **Save & Apply** to save email alarm settings.

**NOTE**

If you want to use a custom SMTP server to send Email messages, click Advanced, enter your SMTP server information, and click **Save & Apply**.

16.4.2 Speaker Alarm (Configuring Audio Alarms)

A siren can be set up to go off when the camera detects motion. This is helpful if you want to scare off intruders.

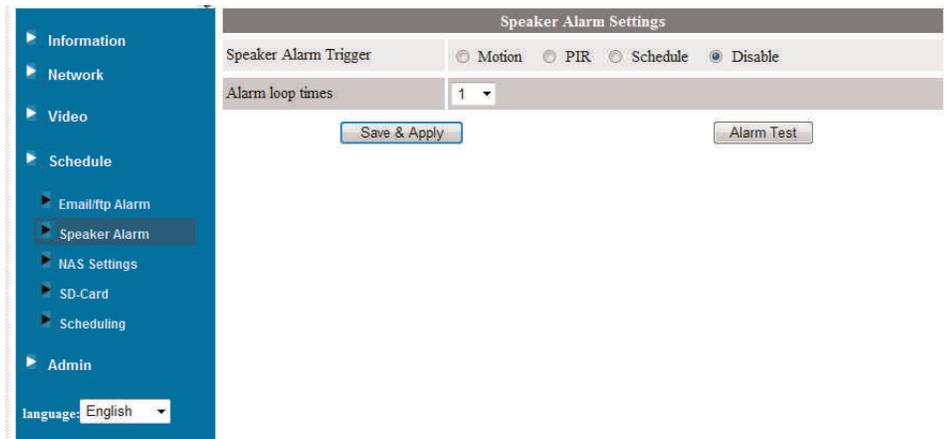

To configure speaker alarms:

- Under **Speaker Alarm Trigger**, select one of the following alarm triggers:
 - Motion:** Use Video motion detection to trigger audio alarms. Video motion detection looks for movement in the image to determine if there is motion. This means that there may be false alarms caused by changes in lighting, trees moving in the wind, etc.
 - PIR:** Use the PIR motion detector to trigger audio alarms. The PIR motion detector uses changes in temperatures (e.g. from a person moving around in front of the camera) to determine if there is motion. PIR motion detection is less effective at higher temperatures.

**NOTE**

- You may also select both PIR and Motion to receive alarms from both motion triggers.

- Schedule:** Create audio alarms based on the settings set in the Schedule. see 16.4.4 *Scheduling (Configuring Recording and Alarm Schedules)*, page 139.
 - Disable:** Disable audio alarms.
- Under **Alarm loop times**, select the number of times the alarm will repeat.
 - Click **Alarm Test** to sound a test alarm.
 - Click **Save & Apply**.

16.4.3 SD Card (Configuring microSD Recording)

Configure video recording to the microSD card (required; not included). To playback recordings saved on the microSD card, use L-View or the iPhone®, iPad®, or Android™ apps.

To configure microSD card recording:

1. Make sure a microSD card (not included) is inserted into the camera. It is recommended to format the microSD card before using it with the camera.
2. Select one of the following recording options:
 - **Always Recording:** Record continuously, all the time to microSD card.
 - **Schedule Recording:** Record according to the settings set in the Schedule.
 - **Disable Recording:** Do not record.
3. Under **When disk space full**, select **Overwrite** for the camera to record over the oldest recordings when the microSD card is full or select **Stop recording** for the camera to stop recording when the microSD card is full.
4. Click **Save & Apply**.

16.4.4 Scheduling (Configuring Recording and Alarm Schedules)

Configure schedules for recording and alarms. Schedules can be configured separately for alarms and recording. You can configure up to 12 schedules.

To create a schedule for alarms or recording:

1. First, you must enable alarms or recording to use the schedule.

2. Check which alarm or recording types will use this schedule:
 - **Email/ftp Alarm:** Check to use this schedule for Email Alarms. Select **Motion triggered** to send an email alarm based on video motion, select **PIR triggered** to use the PIR motion sensor, or select both.
 - **Speaker Alarm:** Check to use this schedule for Email Alarms. Select **Motion triggered** to create an audio alarm based on video motion, select **PIR triggered** to use the PIR motion sensor, or select both.
 - **SD Card Recording:** Check to use this schedule for microSD recording. Select **Continuous** for the camera to record to microSD continuously during the scheduled time. Select **Motion triggered** to record when video motion is triggered during the scheduled time, select **PIR triggered** to record when the PIR motion sensor is triggered during the scheduled time, or select both.
3. Select one of the following to configure the times that will be used for this schedule:
 - **Every week:** Create a weekly recording schedule. Check the days you would like the schedule to apply to. Under **During time**, enter the start time for the schedule on the left and the end time for the schedule on the right.
 - **Every day:** Create a daily recording schedule. Under **During time**, enter the start time for the schedule on the left and the end time for the schedule on the right.
 - **Fixed time:** Create a one time schedule (for example, if you are going on vacation, and would like to record all the time). Under **Start time**, enter the exact date and time when you would like the schedule to start and enter the **End time**.
4. Click **Add Schedule**.

To delete a schedule:

1. Existing schedules are shown at the top of the page. Click **Delete** next to the schedule you want to delete.



To edit a schedule:

1. Click **Edit** next to the schedule you want to delete.
2. Edit the schedule settings as needed.
3. Click **Update Schedule**.

16.5 Thermometer

The Thermometer menu allows you to select the temperature units (Fahrenheit or Celsius) used in the camera display. It also allows you to configure the high and low temperatures that will trigger temperature push notifications.



NOTE

Temperature push notifications are only available on smartphones or tablets. You must enable temperature push notifications through the Alarm Notification menu in the Lorex Ping app to receive them on your device.

LOREX VIEW WHAT MATTERS - INSTANTLY AWARE

Infrared Thermometer

Temperature Scale Celsius Fahrenheit

Temperature Range : High Degree

Temperature Range : Low Degree

*Will Send Alarm If Temperature Outside of Range!

Save & Apply

Information

Network

Video

Schedule

▶ Email/ftp Alarm

▶ Speaker Alarm

▶ NAS Settings

▶ SD-Card

▶ Thermometer

▶ Scheduling

Admin

language: English ▼

To configure thermometer settings:

1. Under **Temperature Scale**, select **Celsius** or **Fahrenheit**.
2. Under **Temperature Range: High**, select the high temperature value that will trigger push notifications on phones and tablets.
3. Under **Temperature Range: Low**, select the low temperature value that will trigger push notifications on phones and tablets.
4. Click **Save & Apply**.

16.6 Admin

Configure the camera date and time, passwords, and LED's. Restart the camera. Perform system upgrades.

16.6.1 Admin Login

Configure the admin user name and password for the camera. The admin user name and password are used to login to Web Configure or change settings using apps. Configure the web access port.

The screenshot shows the LOREX web interface. At the top, there is a blue header with the LOREX logo and the slogan "WATCH OVER YOUR WORLD FROM ANYWHERE IN THE WORLD". Below the header is a navigation menu on the left with the following items: Information, Network, Video, Schedule, Admin, Admin login, Led Control, Date/Time, Upgrade, and reboot. At the bottom of the menu is a language dropdown set to "English". The main content area is titled "Web Access & Password Settings" and contains the following fields:

Web access port	80
Username	admin
Password	••••••
Password confirm	••••••

Below the fields is a "Save & Apply" button.

To configure the admin user name and password used to login to Web Configure:

1. Under **Username**, enter the desired admin user name for the camera. The default is **admin**.
2. Under **Password**, enter the desired admin password for the camera. By default, the password field is **left blank** when logging in. Repeat the password under **Password confirm**.
3. Click **Save & Apply** to apply the settings to the camera. Restart the camera by disconnecting and reconnecting the power adapter or pressing the Reboot button (see 16.6.5 *Reboot*, page 146).

To configure the Web access port:

For added security, you may change the camera's web access port. Please note that if you change the web access port, you must enter the camera's **IP address**, a **colon (:)**, and the camera's web access port when connecting to the camera's IP address on the local network (e.g. *192.168.0.101:80*).

1. Under **Web access port**, enter the desired web access port. It must not be used by any other device on your network. Note that L-View will automatically update the web access port when connecting to Web Configure on the local network.
2. Click **Save & Apply**. Restart the camera by disconnecting and reconnecting the power adapter or pressing the Reboot button (see 16.6.5 *Reboot*, page 146).




NOTE

Your computer must be on the same network as the camera to use Web Configure. You may change camera settings over the Internet using the iPhone®, iPad®, or Android™ apps.

16.6.2 LED Control

Configure the behavior of the camera status LED's. This is useful if you want the camera to be harder to spot at night.

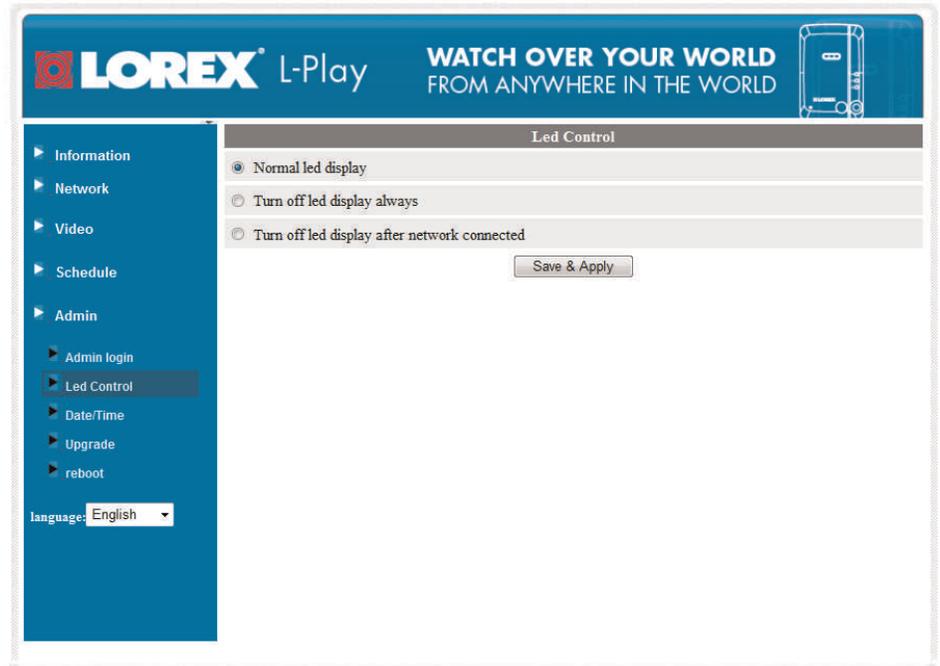

To configure the LED's:

1. Select one of the following:
 - **Normal LED display:** LED's will function as normal. For details on LED functions, see 3 *Camera Overview*, page 3 or .
 - **Turn off LED display always:** LED's are turned off at all times.
 - **Turn off LED display after network connected:** LED's turn on when the camera is powered on and turn off once a network connection is made.
2. Click **Save & Apply** to apply settings to the camera.

16.6.3 Date/Time

Configure the camera date and time. The camera syncs with an Internet NTP time server to automatically provide the correct time, once you have configured your time zone and daylight savings time settings.

**WARNING**

It is highly recommended to set the date and time when first setting up your system.
Inaccurate time stamps may render your footage unusable for court evidence

To set the camera date and time:

1. Under **Time Zone**, select your time zone.
2. Select **Enable** under **Daylight Savings Time** if your region observes Daylight Savings Time. Configure the **Start Time** and **End Time** for Daylight Savings Time if needed.
3. Click **Save & Apply** to apply settings to the camera.

16.6.4 Upgrade

Upgrade the camera firmware. When firmware upgrades are released, they will be available as a free download from www.lorextechnology.com.

**NOTE**

Your computer must be on the same network as the camera to upgrade the firmware.


To upgrade the camera firmware:

1. Download the free firmware upgrade from www.lorextechnology.com. Unzip the contents of the firmware .zip file to a folder.


- In L-View, right-click on the camera in Auto Search and click **Web Configure**.



- Type the camera admin user name (default: **admin**) and password (default: **left blank**) and click **Ok** to log into the camera.
- Click **Admin** then click **Upgrade**.

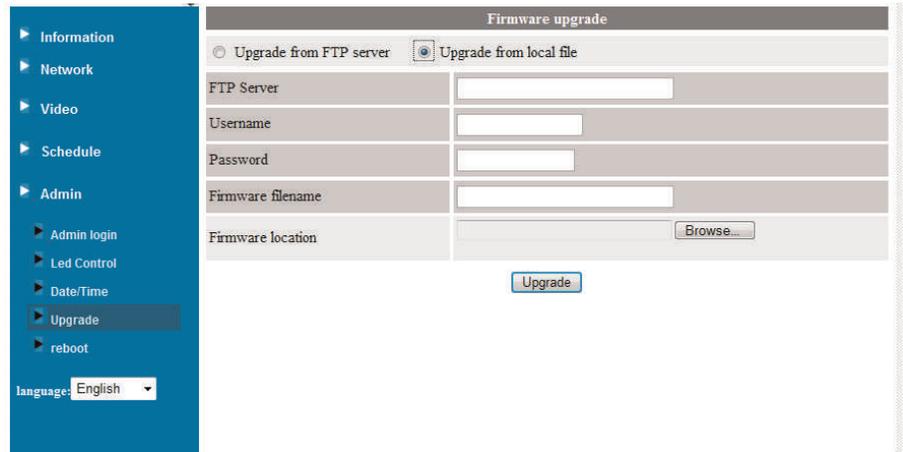

- Select **Upgrade** from local file.
- Click **Browse**, locate the firmware upgrade file, and then click **Open**.
- Click **Upgrade**. Wait for the firmware upgrade to complete. Do not disconnect the power or network cable during the firmware upgrade. The camera will reboot once firmware upgrade is complete.

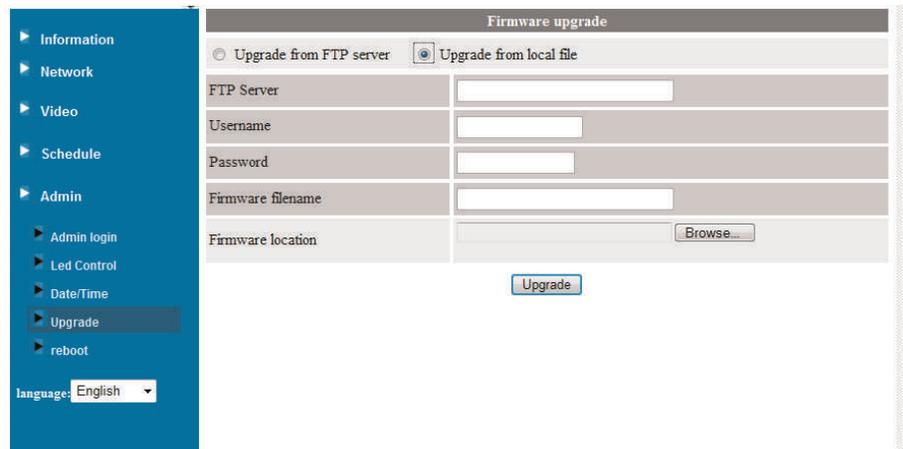


16.6.5 Reboot

Restart the camera from your Internet browser. This is useful if you need to restart the camera to apply settings changes or if the camera encounters an error.

To restart the camera:

1. Press the **reboot** button.

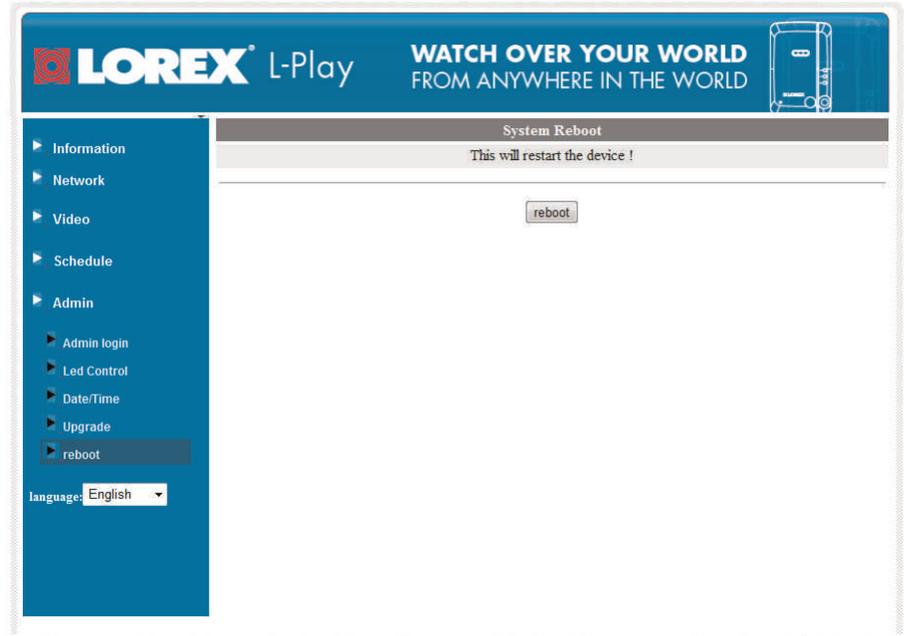

Technical Specifications

Specification	Value
Mode:	Day & Night
Power:	5V (USB) — 12V, 1A
Processors:	RISC CPU, hardware video processing and compression.
Network interface:	Ethernet 10BaseT/100BaseTX, Auto-MDIX, RJ-45
Wireless interface:	IEEE 802.11b/g/n
Image sensor:	HD up to 1280x800 resolution 1/4" Megapixel Color CMOS Separate sensors for day and night with automatic gain, white balance, exposure and brightness control
PIR sensor:	Effective distance — 7 meters
Light sensitivity:	0.2 Lux (IR LED off) 0 Lux (with 9 meters IR LED on) Automatically turn on the IR LED in low light environment
Infrared thermometer:	Infrared range: -40 ~ 115°C, accuracy: ±0.5°C
Lens:	4.2mm, F2.4, viewing angle: 66°, fixed iris. Day and night separate lens
Buttons:	One reset button, to factory default settings One WPS button for automatic WiFi setup
Indicators:	One LED for Internet connection status indication One LED for Ethernet connection indication One LED for SD card recording indication
Video compression:	H.264
Video streaming:	Separate frame rate / resolution / bandwidth settings for PC and mobile.
Resolution:	1280x800, 1024x768, VGA (640x480), QVGA (320x240)
Bandwidth:	64Kbps ~ 3Mbps
Frame rate:	1~30fps
Audio:	Built-in 0.5W speaker for alarm and half-duplex two-way audio. Speaker jack for external speaker.
Video management software:	L-View software for viewing and recording up to 16 cameras (PC / Mac) Lorex Ping app for viewing cameras on mobile (iOS / Android™)
Security:	Web management username / password protection Video display ID / password protection WiFi WEP and WPA / WPA2 security mode
Installation, management and maintenance:	Plug & play by ID / password Firmware upgrades by FTP L-View SW upgrade Push Notification
Users:	Up to 20 simultaneous users (depends on video settings and Internet bandwidth)

Specification	Value
Alarm and event management:	Events triggered by PIR and sound detection Email / FTP alarm message Temperature alarm for low / high room temperature Push notification on supported mobile devices
Dimensions (W x D x H):	68mm x 25mm x 95mm 2.8" x 1.0" x 3.7"
Weight:	0.28kg / 0.62lbs (including camera bracket)
Approvals:	EMC — CE, FCC Part 15 Subpart B Class B, IC Class B Wireless RF — CE, FCC Part 15 Subpart C, RSS210
Operating conditions:	0–50°C Humidity 20–80% RH (non-condensing)

As our product is subject to continuous improvement, Lorex Corporation & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation.

Clean camera with a slightly damp cloth or an anti-static cloth. Never use cleaning agents or abrasive solvents.

- Do not clean any part of the product with cleaners with thinners or other solvents and chemicals. This may cause permanent damage to the product which is not covered by the warranty. When necessary, clean it with a damp cloth.
- Keep your camera and monitor away from hot, humid, or wet areas or strong sunlight
- Every effort has been made to ensure high standards of reliability for your video monitor. However, if something does go wrong, please do not try to repair it yourself. Contact customer service for assistance.

18.1 Disposal of the Device

At the end of the product lifecycle, you should not dispose of this product with normal household waste, but take the product to a collection point for the recycling of electrical and electronic equipment. The symbol on the product, User's Guide, and/or box indicates this.



Some of the product materials can be re-used if you take them to a recycling point. By re-using some parts or raw materials from used products you make an important contribution to the protection of the environment.

Please contact your local authorities in case you need more information on the collection points in your area. Dispose of the battery pack in an environmentally-friendly manner according to your local regulations.

**WARNING**

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the device.

FCC Notice

This device complies with Part 15, subpart C, of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

However, it is imperative that the user follows the guidelines in this manual to avoid improper usage which may result in damage to the unit, electrical shock and fire hazard injury. In order to improve the features, functions, and quality of this product, the specifications are subject to change without notice from time to time.

**CAUTION**

To maintain compliance with the FCC's RF exposure guidelines, place the camera at least 20cm (7.87in) from nearby persons.

Industry Canada statement:

This device complies with RSS-210 of the Industry Canada Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Ce dispositif est conforme à la norme CNR-210 d'Industrie Canada applicable aux appareils radio exempts de licence. Son fonctionnement est sujet aux deux conditions suivantes: (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

WPS Wireless Setup does not work or router does not support WPS:

- If using a smartphone or tablet, connect your device to your WiFi network and press the WiFi setup button in Lorex Ping. Follow the on-screen instructions to setup WiFi.
- If using a PC or Mac, connect the camera to the router using Ethernet and manually set-up the camera to use WiFi. See 9.2 *PC WiFi Setup*, page 26 or 10.2 *Mac WiFi Setup*, page 32.

WiFi is not working:

- Camera has not been setup to use WiFi. If using a PC or Mac, WiFi setup must be completed while the camera is connected via Ethernet. See 9.2 *PC WiFi Setup*, page 26 or 10.2 *Mac WiFi Setup*, page 32.
- Incorrect password/network information entered. Re-complete WiFi setup and double-check your WiFi network settings.
- Camera is not in range of WiFi router. Move the camera closer to the WiFi router.
- Interference with other wireless devices is affecting signal strength. Move the camera and/or wireless router further away from any cordless telephones or other wireless devices.

Password required to change settings different than password created:

- Changing settings requires the admin user name and password for the camera. This is a different password than the one used to connect to the camera for video streaming. By default, the admin user name is **admin** and the password is **left blank**.

Forgot password for camera:

- Press and hold the Reset button under the camera for 4 or more seconds to reset the camera to factory default settings. The password will reset to the default password **lorex**.

Camera does not appear in Auto Search or Local Search:

- Camera may be on different network than computer. Press + next to camera list and enter the camera ID and password manually. If this does not work, check the network connection.

Cannot access Web Configure on PC or Mac:

- Camera may be on different network than computer. Connect the camera and computer to the same network (i.e. the same router), or use a mobile device to change settings over the Internet.

Bright spot in video when viewing camera at night:

- Night vision reflects when pointing a camera to a window. Move the camera to a different location.



Website

www.lorextechnology.com

Copyright

© 2015, Lorex Corporation

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of Lorex Corporation and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Legal disclaimer

As our product is subject to continuous improvement, Lorex Corporation & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE.

Publ. No.: LX400003
Release: 3.0
Commit: 23331
Head: 23332
Language: en-US
Modified: 2015-02-23
Formatted: 2015-02-23