

Package Contents

- Solar Panel
- Wall Mounting Bracket
- Extension Cable
- Mounting Screws and Anchors (×4)
- Drillbit
- Cable Guides (×3)
- Cable Guide Screws and Anchors (×3)

Safety Precautions

- Ensure you can safely drill into your selected mounting location, and the mounting surface can support at least 3 times the combined weight of the solar panel, wall mount bracket, and camera.
- The solar panel may require periodic cleaning to ensure it is capturing light effectively. Use a damp cloth only. Do not use chemical cleaners.
- Do not dispose of the battery in regular garbage. Handle as hazardous waste. Dispose according to local hazardous waste programs.

STEP 1: Positioning Tips

- Choose a location for the solar panel with plenty of direct sunlight exposure. Do not install in a covered or shaded area. Performance is dependent on temperature and light exposure.
- Position the solar panel in the desired mounting area and check the LED indicator on the underside of the panel. If the LED turns on, the solar panel is receiving sufficient light to power your camera.
- The solar panel requires at least 3-4 hours of direct sunlight per day. Rotate the panel to face the direction where it will get the most exposure to sunlight.

STEP 2: Select an Install Method



The solar panel supports 2 installation methods:

- **STEP 3A:** Install your wire-free camera onto the included bracket. Both the camera and solar panel must be installed in an area with plenty of direct sunlight exposure.
- **STEP 3B:** Install your wire-free camera in a sheltered location and install the solar panel in a separate, exposed location (see the back of the guide for details).

STEP 3A: Installation

To install the panel and camera in the same location:

1. Loosen the adjustment ring to position the mount head at the optimal angle determined in STEP 1. Twist the solar panel onto the mounting bracket (see **Figure 1**).
2. Tighten the adjustment ring, then tighten the screw under the mounting point using a Phillips screwdriver (not included - see **Figure 1**).
3. Set the mounting bracket in the desired mounting position and mark holes for screws.
4. Drill the holes using the included drillbit.
5. Insert the included anchors, then attach the bracket to the mounting surface using the provided screws (see **Figure 2**). Make sure all screws are fastened tightly.



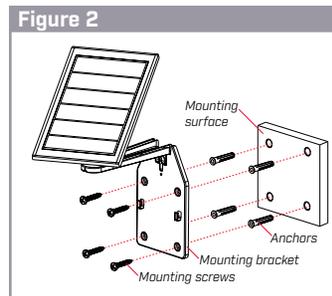
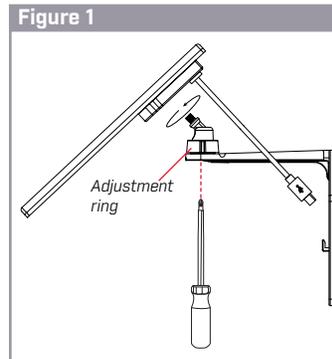


STEP 3A: Installation (CONTINUED)

6. Feed the cable from the solar panel through the cable gland on the base of your wire-free camera (not included - see **Figure 3**).
7. Lower the camera base onto the mounting bracket. Align the 2 tabs in the mounting bracket with the 2 slots in the camera base. Push down on the camera base to lock into place (see **Figure 3**).
8. Connect the cable from the solar panel to the USB port on your wire-free camera's Power Pack.

NOTE: Check the LED indicator on the Power Pack to ensure it is receiving power. The LED glows red if the Power Pack is charging, and green for fully charged.

9. Ensure the rubber plug cover is fitted over the USB connector. To ensure a weatherproof seal, twist and push the plug cover until the end of the USB connector is visible (see **Figure 4**). Pull gently on the cable to ensure it remains connected.
10. Insert the security screw through the fastener on the top of the camera base, which lines up with a hole on the mounting bracket. Tighten using a Phillips screwdriver (see **Figure 5**).

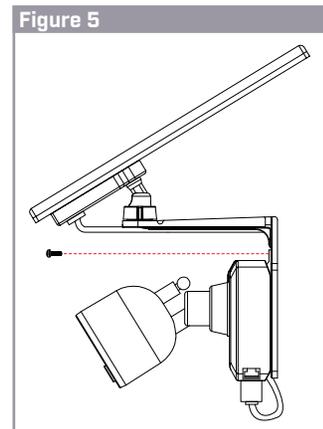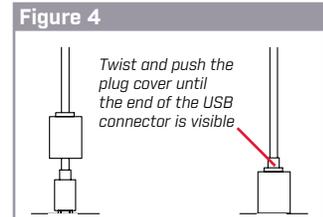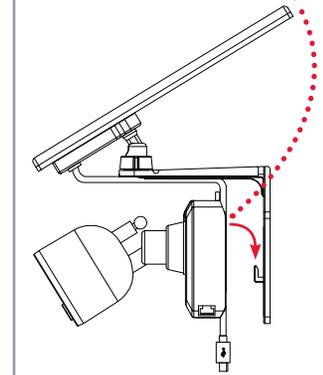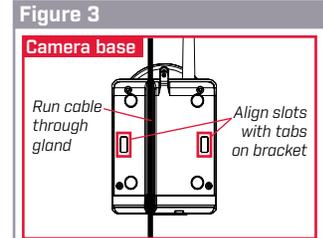

STEP 3B: Installation

ATTENTION:

Ensure you choose a location for the solar panel that is within reach of your wire-free camera using the included 10ft (3m) extension cable.

To install the panel in a different location than the camera:

- Loosen the adjustment ring to position the mount head at the optimal angle determined in STEP 1. Twist the solar panel onto the mounting bracket (see **Figure 5**).
- Tighten the adjustment ring, then tighten the screw under the mounting point using a Phillips screwdriver (not included - see **Figure 5**).
- Set the mounting bracket in the desired mounting position and mark holes for screws.
- Drill the holes using the included drillbit.
- Insert the included anchors, then attach the bracket to the mounting surface using the provided screws (see **Figure 6**). Make sure all screws are fastened tightly.
- If your wire-free camera (not included) is already mounted, detach the camera from the mounting plate by removing the security screw (see **Figure 7 - Part A**). Lift the camera up and away from the mounting surface (see **Figure 7 - Part B**).

Figure 5

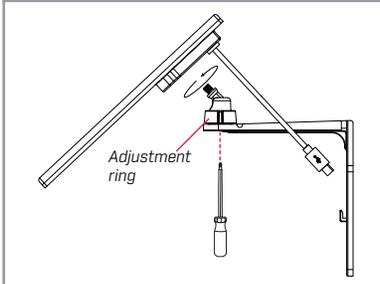


Figure 6



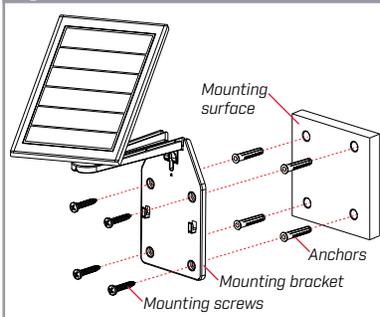


Figure 7

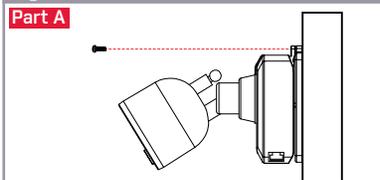


Part B

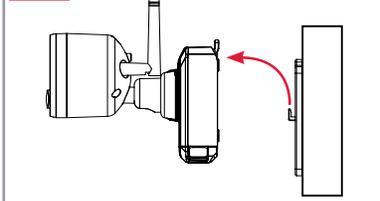


STEP 3B: Installation (CONTINUED)

- Connect the included extension cable to the solar panel cable. Ensure the cables are connected tightly for a weatherproof seal.
 - Feed the cable from the solar panel through the cable gland on the base of your wire-free camera (see **Figure 8**).
 - Lower the camera base onto the mounting plate, and reattach the security screw.
 - Connect the cable from the solar panel to the USB port on your wire-free camera's Power Pack.
- NOTE:** Check the LED indicator on the Power Pack to ensure it is receiving power. The LED glows red if the Power Pack is charging, and green for fully charged.

Figure 8

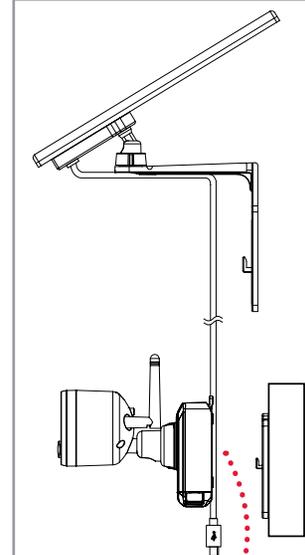

Camera base

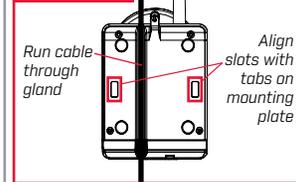

- Ensure the rubber plug cover is fitted over the USB connector. To ensure a weatherproof seal, twist and push the plug cover until the end of the USB connector is visible (see **Figure 9**). Pull gently on the cable to ensure it remains connected.
- [OPTIONAL]** Use the included cable guides with the cable guide screws and optional drywall anchors as needed (see **Figure 10**).

Figure 9



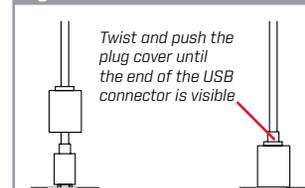


Figure 10

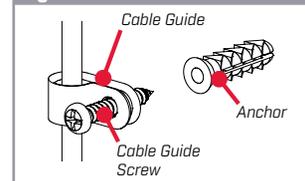

Dimensions

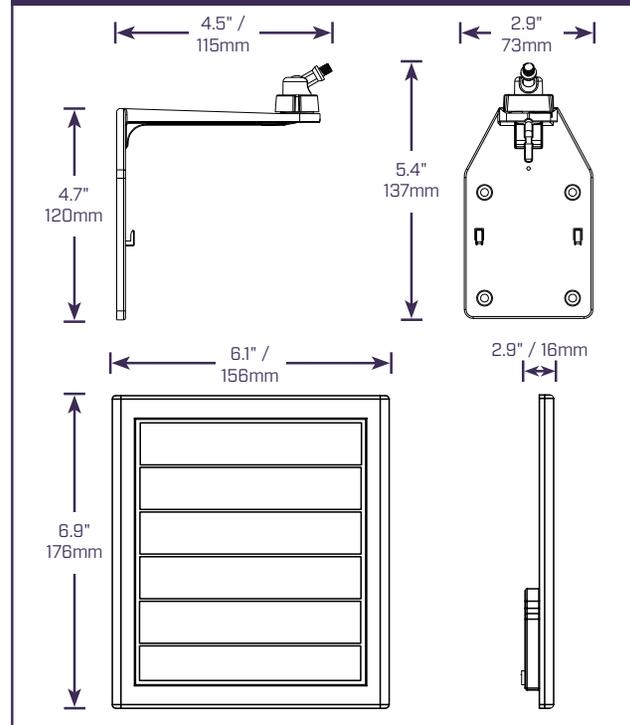

Resources

Need Help?

Visit us online for up-to-date software and complete instruction manuals

- Visit lorex.com
- Search for the model number of your product
- Click on your product in the search results
- Click on the **Downloads** tab



Copyright © 2019 Lorex Corporation
As our products are subject to continuous improvement, Lorex reserves the right to modify product design, specifications and prices, without notice and without incurring any obligation. E80E. All rights reserved.