
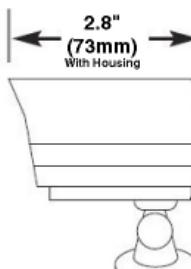


Camera Specifications

Image Device	1/4" Color Image Sensor
Effective Pixels	512H x 582V
Scanning System	2:1 Interlace PAL: 625 Lines
Resolution	Horizontal 420 TV lines
AES Shutter Speed	1/50 ~ 1/1000,000 sec.
S/N Ratio	More than 48dB (AGC off)
Sync. System	Internal
Min. Illumination	0.05 LUX without IR LED
IR Night Vision	24 IR LED / 850nm / 50' (15m)
Video Output	1.0 Vp-p (75 ohms)
White Balance	AWB
Termination	6-pin DIN
Lens	Fixed Lens (3.6mm)
Viewing Angle	H: 59°; V:44°; D: 73°
FOV (Diagonal)	73 Degrees
Power Requirement	DC 12V ± 10%
Power Consumption	With IR: Max 350mA W/o IR: Max 100mA
Operating Temp	14°F ~ 122°F (-10°~ 50°C)
Operating Humidity	Within 90% RH
Weight (With Stand)	0.81lb / 0.36 kg

Dimensions:

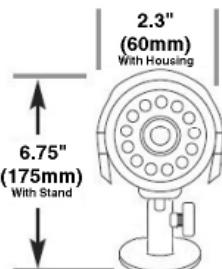

It's all on the Web!

- Product Information
- Specification Sheets
- User Manuals
- Software Upgrades
- Quick Start Guides
- Firmware Upgrades

VISIT
www.lorexcctv.com

Lorex Technologies Inc.
Copyright © 2008 Lorex Technologies Inc.
As our products are subject to continuous improvement, Lorex reserves the right to modify product design, specifications and prices, without notice and without incurring any obligation. E&OE

WEATHERPROOF COLOR CAMERA

WITH NIGHT VISION AND AUDIO

MODEL: SG7555PK4P



QUICK START GUIDE

English Version 2.0



www.lorexcctv.com

Package Contents



4 x Color Day/Night Cameras



4x Camera Stands



4 x 60' (18m) DIN Extension Cables

Features:

- High Resolution Image Sensor
- 24 High Intensity IR LEDs provide effective night vision range up to 50 ft. (15 m)**
- Day / Night mode: Picture automatically switches to B&W delivering better clarity in low light conditions
- Weatherproof*** Cameras ideal for indoor and outdoor applications (IP66)
- All-in-one camera cable (providing video, audio, and power) plugs directly to the monitor and eliminates the need for a separate power adaptor
- 60 ft.(18 m) extension cable included per camera
- Ceiling or Wall Mountable Camera with versatile stand provides flexible mounting options

** Night Vision Range up to 50ft. (15m) in ideal conditions. Objects at or beyond this range may be partially or completely obscured, depending on the camera application.

*** Not recommended for submersion in water.

Installing the Camera

ATTENTION - Test the camera prior to selecting a permanent mounting location by temporarily connecting the cameras and cables to the System.

1. Mount the camera stand to the desired mounting surface. Attach the camera to the supplied stand.

Note: The camera can be mounted to either a wall or a ceiling.



Figure 1.0 Attach the camera to the mounting stand

2. Aim the camera. Remove the protective film from the lens.

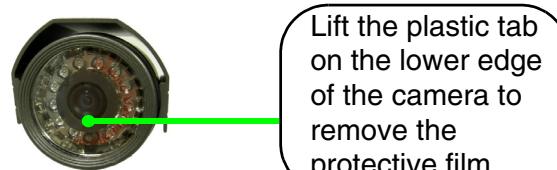


Figure 2.0 Remove the protective film from the camera



Figure 3.0 Connect the extension cable

3. Connect the extension cable to the camera. Connect the other end of the extension cable to the system.



Note: Confirm that the arrows on the DIN extension cable are aligned with the camera cable and system ports when connecting the cable. If the pins in the DIN cable are bent, the camera will *NOT* function.


Camera Diagram



Figure 4.0 Camera diagram

6-PIN DIN Connection:

Cameras with 6-pin DIN connections draw power from the observation system or DVR. Additional power adapters are not needed for these cameras when connected to a DIN port on the system.



6 PIN DIN

System Connection Diagram:

