

Take your security system beyond video monitoring with Lorex sensors, ensuring you are always aware of motion inside of your home. With the sensor linking capability, you can program your camera to start recording when a sensor is triggered. The Lorex Sensors have been designed to upgrade your home monitoring experience.

## Window/Door Sensor

- Receive mobile notifications from the Lorex Home™ app or hear a chime<sup>1</sup> whenever your doors or windows open
- Battery operated and compact in size, install almost anywhere in your home<sup>2</sup>
- Install the sensors on any door or window frame in minutes without using tools



## Motion Sensor

- Get mobile notifications from the Lorex Home™ app or hear a chime<sup>1</sup> when motion is detected in front of the sensor
- Install throughout the inside of your home – mounted on a ceiling, wall, or placed on top of a surface
- Detection range of 26ft with a detection angle of 110° max<sup>3</sup>
- The battery operated and wire-free design makes for easy, seamless installation

## Product Specifications - Window/Door Sensor

Dimensions (W x H x D)	Sensor: 0.87 × 1.42 × 0.51" / 22 × 36 × 13mm Magnet: 0.39 × 0.95 × 0.43" / 10 × 24 × 11mm
Weight	0.71 oz / 20gr
Color	White
Power	Battery: CR1632, included
Connectivity	BLE5.0
Lights	Status Indicator Light
Setup Requirement / Compatibility	Lorex Sensor Hub, Lorex Home Center
Mounting	Adhesive, included
Operating Conditions	Indoor Use
Operating Temperature	14°F ~ 113°F / -10°C ~ 45°C
Operating Humidity	0 ~ 95% RH

## Product Specifications - PIR Motion Sensor

Dimensions (W x H x D)	1.46 × 1.02 × 1.46" / 37 × 26 × 37 mm (with bracket) 1.46 × 1.10 × 1.73" / 37 × 28 × 44 mm (without bracket)
Weight	0.36 oz / 10gr
Color	White
Power	Battery: CR2450, included
Connectivity	BLE5.0
Detection Range	26ft Max. <sup>3</sup>
Detection Angle	110 degrees Max. <sup>3</sup>
Installation Type	Tabletop, wall or ceiling
Lights	Status Indicator Light
Setup Requirement / Compatibility	Lorex Sensor Hub, Lorex Home Center
Mounting	Adhesive, included
Operating Conditions	Indoor Use
Operating Temperature	14°F ~ 113°F / -10°C ~ 45°C
Operating Humidity	0 ~ 95% RH
Warranty	1 year limited warranty

## Model Information

AK41TK	6-95529-02713-5
Configuration	Window/Door Sensor
Package Type	White Box
Package Dimensions (W × D × H)	9.3 × 3.4 × 2.1" / 236 × 86 × 33mm
Package Weight	0.55lb / 0.25kg
Package Cube	0.023 cbf / 0.00066 cbm


## Model Information

AM41TK	6-95529-02587-2
Configuration	PIR Motion Sensor
Package Type	White Box
Package Dimensions (W × D × H)	9.3 × 3.4 × 2.1" / 236 × 86 × 33mm
Package Weight	0.55lb / 0.25kg
Package Cube	0.023 cbf / 0.00066 cbm

## What's in the box<sup>4</sup>



## What's in the box<sup>4</sup>

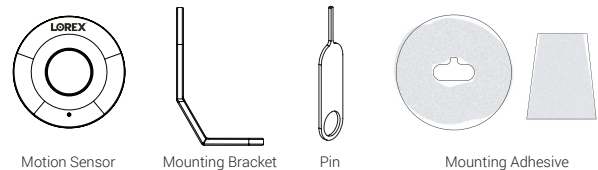

### Disclaimers:

1. Chime notification originates from a Lorex Hub, which is activated when linked sensors are triggered.
2. Sensors need to be within range of the hub to work.
3. Range will be affected by environmental factors
4. May include one or more, depending on the package purchased.