


LNC226X QUICK CONNECTION GUIDE

What's Included

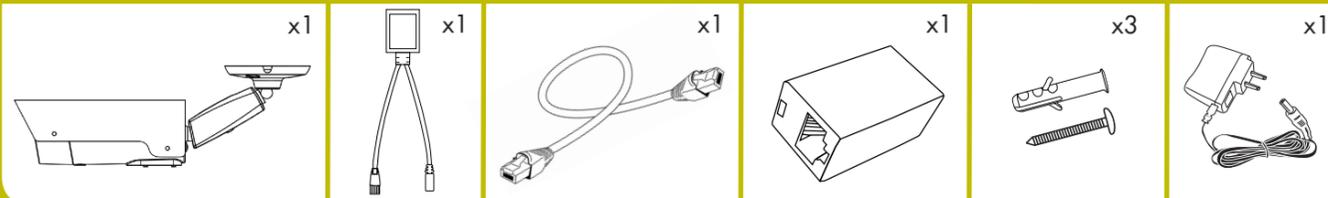

1 Installing the Camera

! Even though the camera is weatherproof rated, all wired connections from the camera must be sheltered from the elements.

Installation Tips


- Camera is rated for indoor/outdoor installation. For outdoor applications, installation under shelter is recommended.
- Before installing the camera, carefully plan where and how it will be positioned, and where you will route the cabling that connects the camera to the power adapter.
- If using the camera wirelessly, avoid installation in a location which requires the wireless signal to pass through cement, concrete and metal structures. This will reduce the transmission range.
- Wireless cameras require a power source to operate.
- Ensure power outlets are sheltered from the elements.

1 Use the included mounting screws to attach the camera to the mounting surface:


- Mark the positions of the screw holes on the mounting surface.
- Drill holes and insert the included drywall anchors as needed.
- Firmly attach camera to the surface using the included screws.

NOTE: If you run the cabling through the mounting surface, connect to power before attaching the camera to the wall.

NOTE: If you run the cabling along the mounting surface, run the camera's Ethernet cable through the cable notch on the mounting plate.




2 Adjust the camera so it captures the desired viewing area.

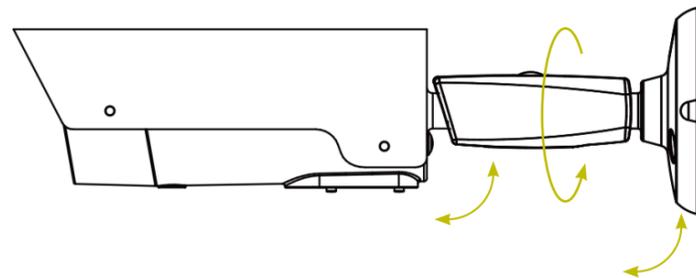


3 Remove the protective film from the front of the camera. If the film is not removed, it will affect picture quality.

2A Connections for WiFi Setup

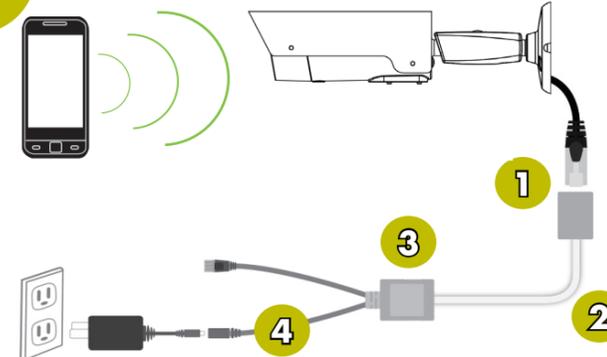

1 Connect the camera's Ethernet cable to the Ethernet splitter.




2 Connect the other end of the Ethernet splitter to the Ethernet extension cable.




NOTE: You can use up to 164ft of Ethernet extension cable (not included).

3 Connect the other end of the Ethernet extension cable to the 2-in-1 adapter.

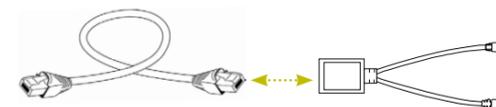


4 Connect one end of the power adapter to the 2-in-1 adapter, and connect the other end to a power outlet.

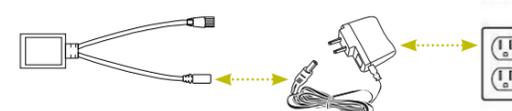


NOTE: Power outlet must be sheltered from the elements.

Complete the setup using the Quick Mobile Guide.


2B Connections for Ethernet Setup

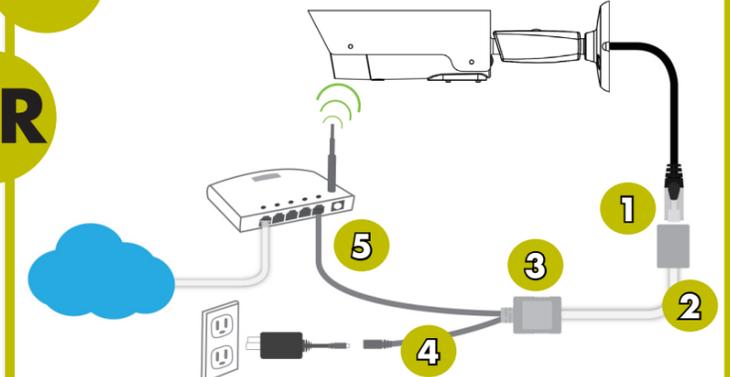

1 Connect the camera's Ethernet cable to the Ethernet splitter.



2 Connect the other end of the Ethernet splitter to the Ethernet extension cable.



NOTE: You can use up to 164ft of Ethernet extension cable (not included).

3 Connect the other end of the Ethernet extension cable to the 2-in-1 adapter.




4 Connect one end of the power adapter to the 2-in-1 adapter, and connect the other end to a sheltered power outlet.



NOTE: Power outlet must be sheltered from the elements.

5 Connect the Ethernet cable from the 2-in-1 adapter to a LAN port on your router (not included).



Complete the setup using the Quick Mobile Guide.