


## 1A IPHONE® / IPAD® / ANDROID™ WIFI SETUP

**NOTE:** Ensure you have completed "2A - Connections for WiFi Setup" in the Quick Connection Guide before starting.

- 1: Connect your smartphone or tablet to your WiFi network.
- 2: Download the free **Lorex Ping** app, and tap the Lorex Ping icon to open the app.
- 3: Register your product using the Lorex Ping app by following the on-screen instructions.




Press **Wifi Setup**  
Then Press **Next**



Enter the password for your WiFi network and press **OK**


A QR code appears on the screen with your WiFi network details.

- 5: Use a Phillips screwdriver to remove the cover over the compartment on the bottom of the camera.

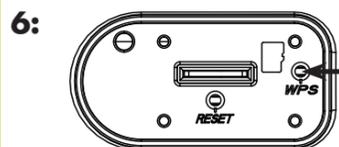

Press the WPS button on the bottom of the camera

- 7: Place your phone or tablet about 1ft (30cm) away from the camera.

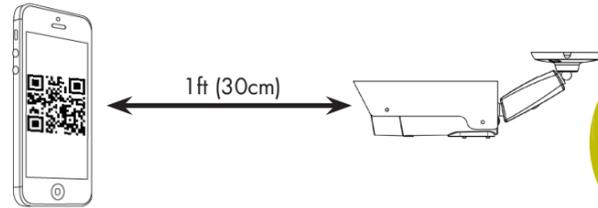


The camera scans the QR code on your device to connect to the WiFi network. In a few seconds, the connection starts and a message appears on your device.

**NOTE:** If the QR code does not scan, complete option 1B and then complete the Optional WiFi setup instead.



Enter a name for your camera and press **OK**

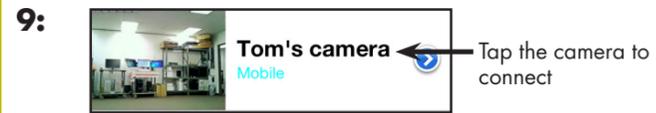

Tap the camera to connect



You will be prompted to create your own password. Tap **OK**



Enter a new password and then tap **OK/Done**

- 10: Tap the name of the camera in Camera List again to connect to the camera. Lorex Ping streams live video from your camera.
- 11: Replace the cover on the bottom of the camera.

**NOTE** For security, a separate admin user name and password is required to change camera settings.

Default admin user name: admin  
Default admin password: \_\_\_\_\_ (leave blank)

# OR

## 1B IPHONE® / IPAD® / ANDROID™ ETHERNET SETUP


**NOTE:** Ensure you have completed "2B - Connections for Ethernet Setup" in the Quick Connection Guide before starting.

- 1: Download the free **Lorex Ping** app, and tap the Lorex Ping icon to open the app.




- 2: Register your product using the Lorex Ping app by following the on-screen instructions.

- 3: Press **+** to add a camera.

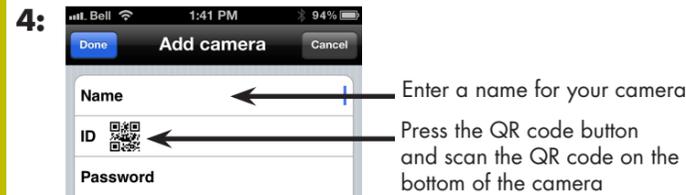


Enter a name for your camera

Press the QR code button and scan the QR code on the bottom of the camera

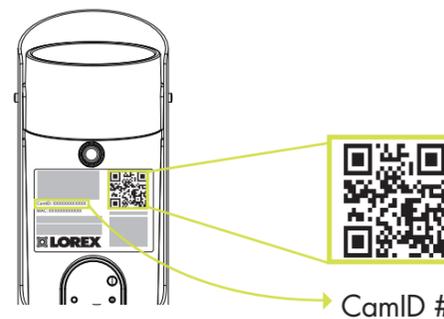

Alternatively, you can manually enter the CamID found on the bottom of your camera.

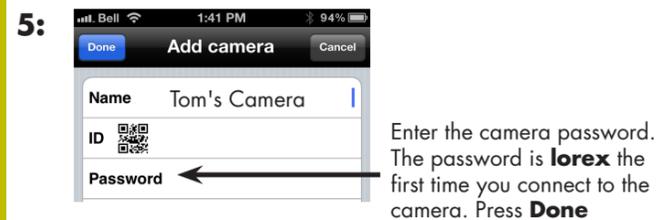

Enter the camera password. The password is **lorex** the first time you connect to the camera. Press **Done**



Tap the camera to connect



You will be prompted to create your own password. Tap **OK**



Enter a new password and then tap **OK/Done**

- 7: Tap the name of the camera in Camera List again to connect to the camera. Lorex Ping streams live video from your camera.

**NOTE** For security, a separate admin user name and password is required to change camera settings.


Default admin user name: admin  
Default admin password: \_\_\_\_\_ (leave blank)

## OPTIONAL WIFI SETUP

- 1: From the Camera List, tap
- 2: Tap **Camera Settings** and enter the admin user name/password above.
- 3: Tap **Network > WiFi Network**.
- 4: Slide **Wi-Fi** to **ON** or check **Wi-Fi** and select your WiFi network. Enter the password and tap **OK**. Wait for the update to complete.
- 5: Remove the Ethernet cable from the camera and it will connect to the WiFi network.

## 1C PC/MAC SETUP—CONNECTING THE CAMERA


Ensure you have completed the "Connections for Ethernet Setup" section in the Quick Connection Guide. If you have already setup the camera on your mobile device, go to step 2 to connect on your computer.

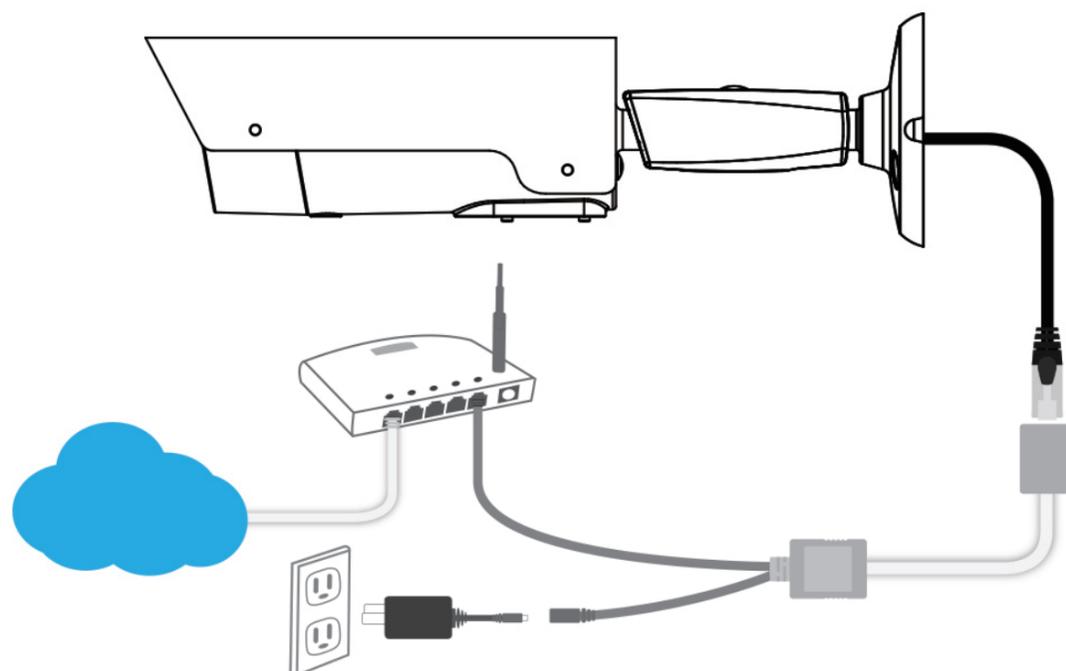

### OPTIONAL—WPS SETUP

Use these steps to set up WiFi if your router supports WPS.

- A:** Power on the camera.
- B:** Use a Phillips screwdriver to open the compartment on the bottom of the camera.
- C:** Press and hold the **WPS** button on your router until the WPS light turns on.
- D:** Then, press the WPS button on the camera within 1 minute. The camera will automatically connect to your WiFi network and the blue Network LED on the camera will turn on.
- E:** Replace the cover on the bottom of the camera.

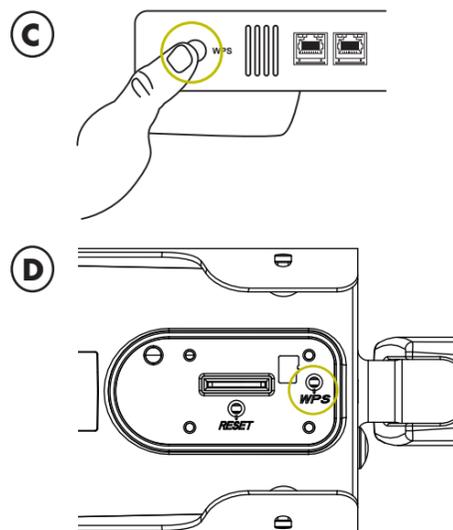


## 2 CONNECTING ON PC OR MAC


**A:** Install the L-View software from the CD or download from [www.lorextechnology.com](http://www.lorextechnology.com)



**B:** Double-click the L-View icon.

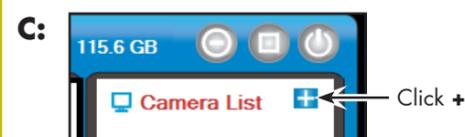

**NOTE:** Mac users, right-click **Camera List** and select **New Camera**.

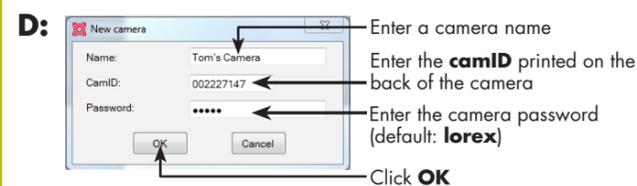

**E:** Click and drag the camera to a display screen to connect to the camera.




- F:** L-View will prompt you to create your own password for the camera. Click **OK**.
- G:** Create a new password for the camera and click **OK**.
- H:** Click and drag the camera to a display screen again to connect. L-View streams live video from your camera.

## 3 OPTIONAL—PC / MAC WIFI SETUP

**A:** Install L-View on a PC in your local network (must be connected to the same router as the camera) and connect to the camera.

**NOTE:** The camera must be connected to your router using an Ethernet cable before you can set it up to use WiFi.

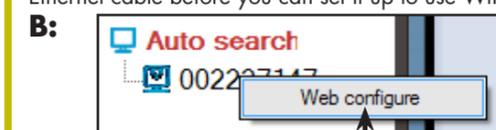

Right-click on the camera ID in the Auto Search area and click **Web Configure**.

**C:** Enter the camera admin user name and password. Click **Log in**.

**NOTE:** Your camera admin user name and password differs from the password used to connect to your camera to view video.

**Default admin user name: admin**  
**Default admin password: \_\_\_\_\_ (leave blank)**

**D:** Click on **Network** and then **WiFi Security**.

**E:** Click **WiFi Scan** and select your WiFi network.



**G:** Click **WiFi Security** again and click **WiFi Test**.

When successful, Status will say Test Success. You may then disconnect the Ethernet cable from the camera. If unsuccessful, double check your wireless password and make sure your camera is close enough to the wireless router to get a good signal.

