



TRUE HIGH DEFINITION DOME SECURITY CAMERA



VIEW YOUR WORLD IN FULL HD

Keep a watchful eye on what matters most with full 1080p HD video.

FEATURES:

- High definition 1080p image sensor ¹
- Crystal clear video with outstanding detail, day or night
- Infrared cut filter ensures accurate color representation
- Night vision range up to 130ft (40m) in ambient lighting and 90ft (28m) in total darkness ²
- Close up recognition in the dark with SmartIR
- ClearNight imaging for improved low light performance and improved recording efficiency
- Extreme temperature performance (-22°F ~ 122°F / -30° ~ 50°C)
- Weatherproof for outdoor & indoor installation (IP66 Rated) ³
- Wide angle 90° field of view
- Residential and business friendly compact design
- 3-axis design for wall / ceiling mounting

1080_P Resolution 130/90_{FT} Night Vision Indoor/outdoor
40/28_M


Product Information

LEV2712B	6-95529-00429-7
Package Weight:	2.3lbs / 1.04kg
Package Dimensions: (W x D x H)	226mm x 147mm x 137mm 8.9" x 5.8" x 5.4"
Package Cube:	0.14 cft / 0.003 cbm
Contents:	1 x Camera, 1 x Mounting Kit, 1 x 60ft/18m Power Extension Cable, 1 x NA Power Adapter
LEV2712SB	6-95529-01068-7
Package Weight:	2.3lbs / 1.04kg
Package Dimensions: (W x D x H)	226mm x 147mm x 137mm 8.9" x 5.8" x 5.4"
Package Cube:	0.14 cft / 0.003 cbm
Contents:	1 x Camera, 1 x Mounting Kit, 1 x 60ft (18m) UL-Compliant Extension Cable, 1 x NA Power Adapter
LEV2712TB	6-95529-01445-6
Package Weight:	2.3lbs / 1.04kg
Package Dimensions: (W x D x H)	226mm x 147mm x 137mm 8.9" x 5.8" x 5.4"
Package Cube:	0.14 cft / 0.003 cbm
Contents:	1 x Camera, 1 x Mounting Kit, 1 x 60ft (18m) UL-Compliant Extension Cable, 1 x NA Power Adapter


Specifications

Image Sensor	1/2.7" 1080p, 2 Megapixel Sensor
Video Format	NTSC / PAL
Effective Pixels	H: 1930 V: 1088
Resolution	1080p
Scan System	Progressive
Sync System	Internal
S/N Ratio	50dB (AGC Off)
Iris	AES
AES Shutter Speed	1/60 (1/50) ~ 1/100,000 sec.
Min. Illumination	0.01 Lux without IR LED 0 Lux with IR LED"
Video Output	MPX
Lens / Lens Type	3.6mm F1.2 / Fixed
Field of view (Horizontal)	90°
Termination	BNC Type
IR LED Qty / Type	12 pieces / 850nm
Night Vision Range	130ft (40m) / 90ft (28m)
Power Requirement	12V DC ±10%
Power Consumption	Max. 200mA (w/IR)
Operating Temp. Range	-22° ~ 140°F / -30° ~ 60°C
Operating Humidity Range	< 95% RH
Environmental Rating	Both (IP66)
Weight (including stand)	0.75lbs / 0.34kg

Installation Diagram

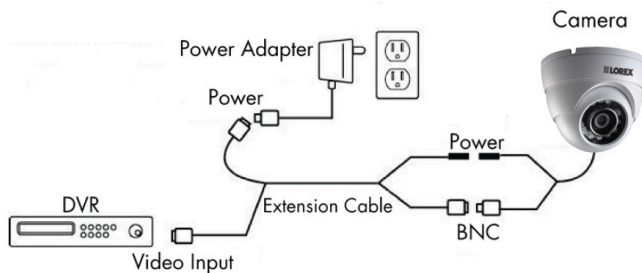

Dimensions

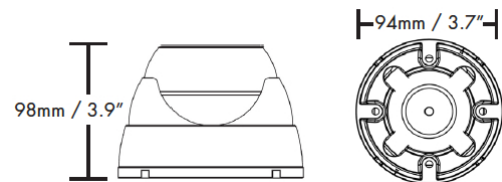

Disclaimers

1. For a list of compatible recorders please visit www.lorextechnology.com/support.
2. Stated IR illumination range is based on ideal conditions in typical outdoor night time ambient lighting and in total darkness. Actual range and image clarity depends on installation location, viewing area, and light reflection / absorption level of object. In low light, the camera will switch to black and white.
3. Not intended for submersion in water. Installation in a sheltered location recommended.

Lorex Corporation, a division of FLIR Commercial Systems Inc.

250 Royal Crest Court
Markham, Ontario,
Canada L3R 3S1

7055 Troy Hill Drive
Elkridge, Maryland
21075 USA

www.lorextechnology.com

© 2017 Lorex Corporation

As our product is subject to continuous improvement, Lorex Corporation & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE.

17-2894-SEC
5-10022017